
PROP. PAY LIMIT OF BIT. SURF. REMOVAL FULL THICKNESS OF MILLING TEMP. RAMP (NOTE "E") PROP. BIT. SURFACE REMOVAL -— EXIST. BIT. SURFACE EXIST. PAVEMENT-MILLED TEMPORARY RAMP (FOR BUTT JOINT AND BIT. TAPER SEE DETAIL BELOW)


OPTION 1

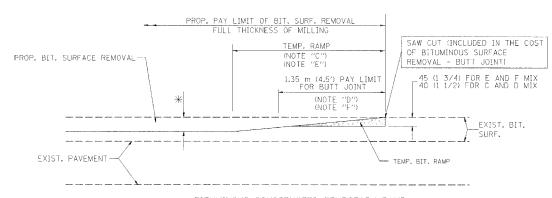

BITUMINOUS CONSTRUCTED TEMPORARY RAMP (FOR BUTT JOINT AND BIT, TAPER SEE DETAIL BELOW)


OPTION 2


TYPICAL TEMPORARY RAMP

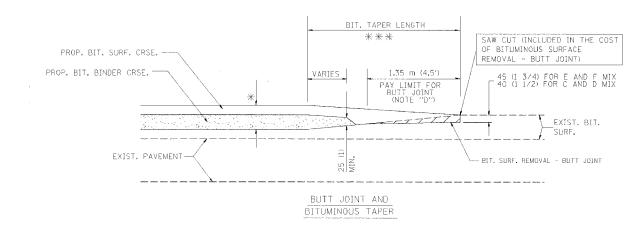

TYPICAL BUTT JOINT AND BITUMINOUS TAPER FOR MILLING AND RESURFACING

SECTION COUNTY TOTAL SHEETS 2771 02-00136-00-RS COOK 27 JLL INOIS FED. AND PROJECT CONTRACT: 83842

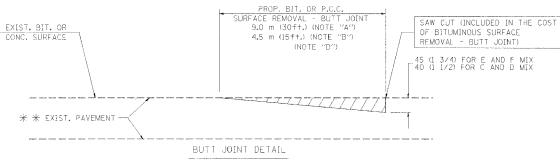

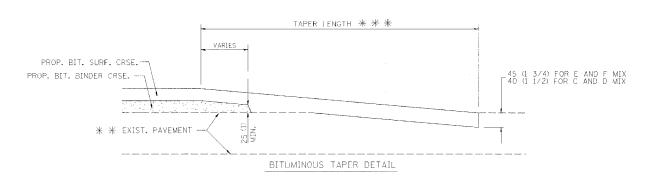

TYPICAL BUTT JOINT AND BITUMINOUS TAPER FOR RESURFACING ONLY

* * PC CONCRETE, BITUMINOUS OR BITUMINOUS RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.

BASIS OF PAYMENT:

- C: THE TEMP, RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING BITUMINOUS SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED BITUMINOUS COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 900 (3 ft.) PER INCH OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 1.35 m (4.57) TEMP. BIT. RAMP WILL BE PAID AS "BITUMINOUS SURFACE REMOVAL ~ BUTT JOINT".
- G: SEE ARTICLE 406.18 AND 406.24 OF THE STANDARD SPECIFICATIONS FOR "BITUMINOUS AND PCC SURFACE REMOVAL, BUTT JOINT".
- * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

** * * * * 6.1 m (20") PER 25 (1) RESURFACING (NOTE "A") 3.0 m (10") PER 25 (1) RESURFACING (NOTE "B")

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS

ILLINOIS DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND BITUMINOUS TAPER

SCALE: NONE

DETAILS

04/06/01 DATE PLOTTED:10/18/2002

DRAWN BY CHECKED BY BD400-05 (VI=BD32)

REVISION DATE: 04/06/01

THE BUTT JOINT WILL BE PAID FOR PER SQUARE METER (SQUARE YARD.) AS "BITUMINCUS SURFACE REMOVAL - BUTT JOINT" OR AS "PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT JOINT".