


	B-6,12		B-9.12		8-618		B-9.18		B-6,24		8-9,24	
A	12"	12"	12"	12"	18"	18"	18"	18 "	24"	24"	24"	24
В	6"	6"	9"	9"	6"	6"	9"	9"	6"	6"	9"	9'
X	9"	10"	9"	10"	9"	10"	9"	10"	9"	10"	9"	10,
(CU. YDS.)	0.37	0.42	0.38	0.42	0.44	0.49	0.45	0.50	0.51	0.56	0,52	0.57
CLASS SI CONCRETE (OUTLETS)		GF	NF	RΔI	N	ΛTI	FS		,			

- 1. CLASS SI CONCRETE SHALL BE USED THROUGHOUT.
- 2. TIE BARS SHALL BE NO. 6 AT 24" CENTERS UNLESS OTHERWISE SHOWN. SPECIAL INLETS AND OUTLETS SHALL BE TIED TO THE PAVEMENT IN ACCORDANCE WITH DETAILS FOR LONGITUDINAL CONSTRUCTION JOINT SHOWN ON STANDARD 420001,


GENERAL NOTES

- 3. TIE BARS SHOWN ABOVE WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED AS INCIDENTAL TO CLASS SI CONCRETE (OUTLETS).
- 4. WHEN SPECIAL INLET IS CONSTRUCTED ADJACENT TO FLEXIBLE PAVEMENT, THE TIE BARS SHALL BE OMITTED AND ALL CONSTRUCTION JOINTS SHALL BE PROVIDED WITH A DOWEL BAR CONFORMING TO ARTICLE 1006.11(b) [(706.11(b)],
- 5. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER CU. YD. FOR CLASS SI CONCRETE (OUTLETS) WHICH PRICE SHALL INCLUDE ALL LABOR AND MATERIAL AS SPECIFIED AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.


DETAIL OF SPECIAL INLET FOR COMBINATION CONCRETE CURB AND GUTTER (BARRIER CURB)

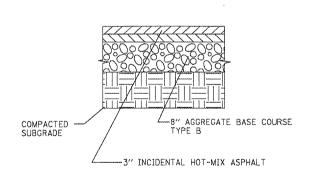

PARKING LOT PAVEMENT DETAIL

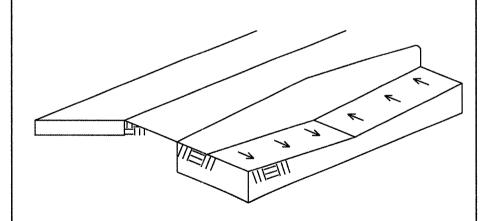

END OF CURB DETAIL

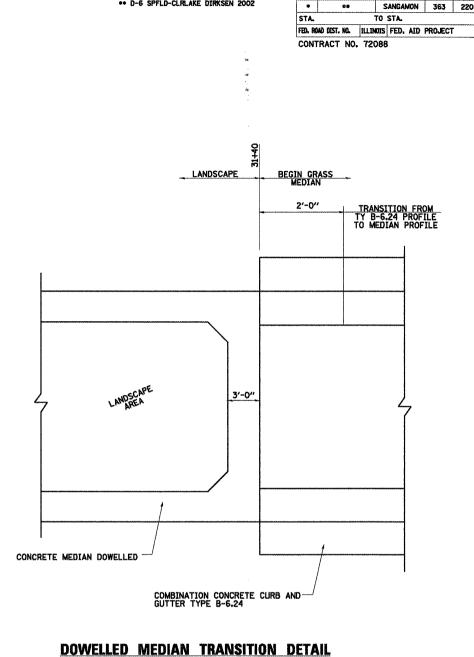

• F.A.I. 72, F.A.P. 67, F.A.P. 75 & F.A.P. 668 •• D-6 SPFLD-CLRLAKE DIRKSEN 2002

SECTION

COUNTY

SHEET 1 OF 3

REVISIONS		TILINOTS DEPARTMENT	T OF TRANSPORTATION		
NAME	DATE	" TECHAOTO DEL VILLIMENTI	OF THE OWNER OF THE OWNER		
		No.			
		."			
		. MISCELL	ANEOUS		
		ROADWAY	DETAILS		
		4 HOADIVA			
		1			
		CON E. MONE	DOLLEN DY MIC		
		SCALE: NONE	DRAWN BY MLO		
		DATE 08/05	CHECKED BY SJK		