TYPICAL SECTION NOTE

PAVEMENT SECTIONS SHOWN OBTAINED FROM RECORD AS-BUILT CONSTRUCTION PLANS.

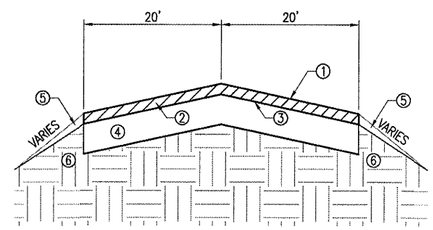

TYPICAL SECTION
"NOT TO SCALE"

LEGEND FOR TYPICAL SECTION

① PROPOSED BITUMINOUS PAVEMENT MILLING (1.5" DEPTH)
② PROPOSED BITUMINOUS SURFACE COURSE (1.5" DEPTH)
③ PROPOSED BITUMINOUS TACK COAT (0.15 GAL/S.Y.)
④ EXISTING BITUMINOUS BASE PAVEMENT (6" DEPTH)
⑤ PROPOSED SHOULDER
⑥ EXISTING EARTH SUBGRADE

DATE	REVISION	BY

SOUTHERN ILLINOIS AIRPORT
MURPHYSBORO / CARBONDALE, ILLINOIS
SIA SOUTHERN ILLINOIS AIRPORT

IL. PROJ.: MDH-3892 A.I.P. PROJ.: 3-17-0009-B29

Hanson Project No. 08A0067D 0800
Filename R-301TYP.DWG
Scale NOT TO SCALE
Date 01/26/09

LAYOUT	JSL	04/03/09
DRAWN	BAK	01/26/09
REVIEWED	CAH	04/10/09

HANSON
Hanson Professional Services Inc.
1525 South Sixth Street
Springfield, Illinois 62703-2886
Offices Nationwide

REHABILITATE TAXIWAY "B"

PROPOSED TYPICAL SECTION

MAY 12, 2009 8:36 AM KINCA00394
I:\AIRPORTS\SIA-CARBONDALE\08A0067\CADD\AIRPORT\SHEET\R-301TYP.DWG - Layout1