F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
311	8 Y-RS-3	COOK	28	6
STA.		TO STA.		
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 60C56

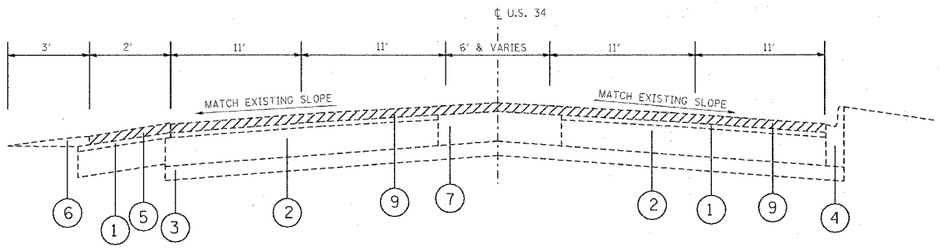

EXISTING TYPICAL SECTION
U.S. 34 (OGDEN AVE.).

STATION
22+93 TO 25+59
30+90 TO 44+45

LEGEND

1. EXISTING HOT-MIX ASPHALT SURFACE COURSE, 4"(±)
2. EXISTING PCC BASE COURSE, 9"(±)
3. EXISTING SUB-BASE GRANULAR MATERIAL
4. EXISTING COMBINATION CONC. CURB & GUTTER TYPE B6.12
5. EXISTING HMA SHOULDER
6. EXISTING WEDGE AGGREGATE SHOULDER
7. EXISTING CONCRETE BARRIER MEDIAN
8. EXISTING STEEL GUARDRAIL
9. HOT-MIX ASPHALT SURFACE REMOVAL - 2 1/2 "
10. PROPOSED POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1 3/4 "
11. PROPOSED POLYMERIZED LEVELING BINDER (MM), IL-4.75, N50, 3/4 "
12. PROPOSED AGGREGATE WEDGE SHOULDER, TYPE B

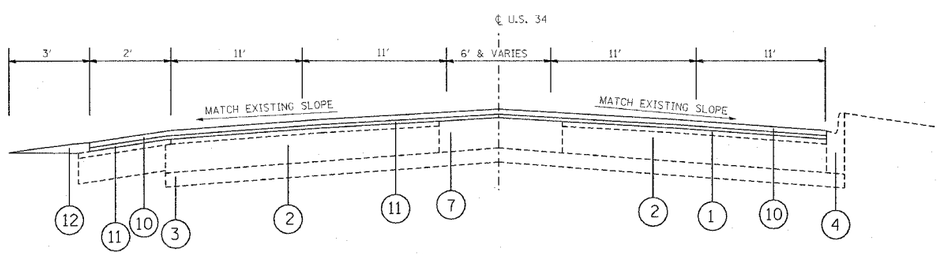

PROPOSED TYPICAL SECTION
U.S. 34 (OGDEN AVE.).

STATION
22+93 TO 25+59
30+90 TO 44+45

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

U.S. 34
EXISTING AND PROPOSED
TYPICAL SECTIONS

SCALE: VERT.
HORIZ.
DATE

DRAWN BY
CHECKED BY

PLOT DATE = 4/11/2007
FILE NAME = c:\projects\d12420\design_ea.dgn
PLOT SCALE = 50.0000 ' / IN.
USER NAME = durandsgn