STAGE I CONSTRUCTION PLAN (WESTBOUND)

MONODIRECTIONAL REFLECTORS TYPE C

STATION TO STATION EACH

2011+81.73 2014+81.73 14.00

TOTAL = 14.00

TEMPORARY CONCRETE BARRIER

STATION

2016+81.73

IMPACT ATTENUATORS, TEMPORARY

(NON-REDIRECTIVE), TEST LEVEL 3

STATION/OFFSET TO STATION/OFFSET FOOT


EACH

1

TOTAL = 1

2011+81.73/4.00' RT 2016+81.73/12.00' LT 500.00

TOTAL = 500.00

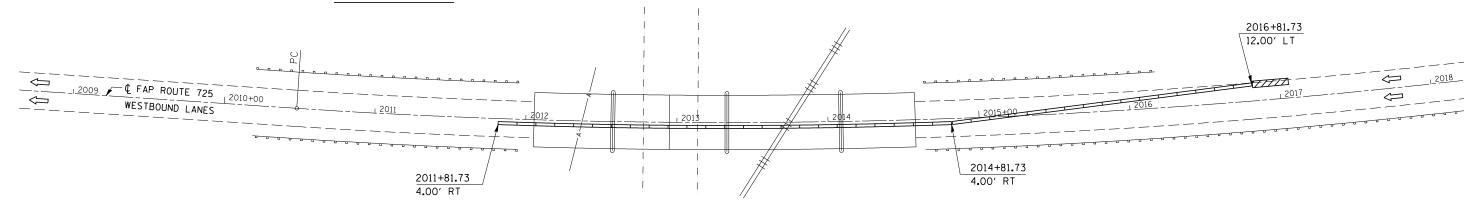

WORK ZONE PAVEMENT MARKING REMOVAL

 STATION
 TO
 STATION
 SO FT

 2011+81.73
 2026+00.00
 4" SOLID WHITE
 473.00

TOTAL = 473.00

PAVEMENT MARKING REMOVAL

STATION	<u>TO</u>	STATION					SQ FT
2011+81.73		2012+05.51	RT	4′′	SOLID		8.00
2011+81.73		2012+05.51	CL	4′′	SKIP		1.00
2014+57.73		2026+00.00	RT	4′′	SOLID		381.00
2014+57.73		2026+00.00	CL	4′′	SKIP		95.00
					TOTAL	=	485.00

NOTES:

TRAFFIC DETAILS NOT SHOWN ARE TO CONFORM WITH STANDARD 701423.

MESSAGE BOARDS WILL BE IN PLACE TWO WEEKS PRIOR TO CONSTRUCTION AND MAY BE ADJUSTED TO MEET FIELD CONDITIONS.

RESIDENT ENGINEER AND TRAFFIC CONTROL SUPERVISOR WILL PROVIDE APPROPRIATE MESSAGE FOR THE CHANGEABLE MESSAGE SIGN.

RAISED REFLECTIVE PAVEMENT MARKERS AFFECTED BY THE PROPOSED TRAFFIC CONTROL PLAN WILL BE COVERED IN A SUITABLE MANNER AND APPROVED BY THE RESIDENT ENGINEER. THIS COST WILL BE INCIDENTAL TO THE APPROPRIATE TRAFFIC CONTROL PAY ITEM.

TYPE C MONODIRECTIONAL REFLECTORS WILL BE ADDED TO THE EXISTING PARAPETS. THE REFLECTOR COLOR, DEPENDING ON THE STAGE, WILL MATCH THE TEMPORARY PAINT PAVEMENT MARKING LINE 4". SEE STANDARD 701423, DETAIL A, FOR PROPER PLACEMENT.

ATTACH VERTICAL PANELS TO THE LEFT GUARDRAIL AT 25 FOOT CENTERS DURING STAGE II. THIS COST WILL BE INCIDENTAL TO STANDARD 701423.

PRIOR TO ROUTING TRAFFIC ONTO THE SHOULDERS AS SHOWN IN THE STAGING PLANS, THE CONTRACTOR SHALL SECURE THE GRATINGS ON ANY INLETS AS DIRECTED BY THE ENGINEER. THIS WORK WILL BE PAID ACCORDING TO ARTICLE 109.04.

ILLINOIS DEPARTMENT OF TRANSPORTATION

STAGE I CONSTRUCTION PLAN

F.A.P. ROUTE 725 SECTION (10-72VB)BRD CHAMPAIGN COUNTY S.N. 010-0037

SCALE: 1" = 30'
DATE: 03/23/07

DRAWN BY: JRP
CHECKED BY:

PLOT DATE = 4/4/2007 FILE NAME = c:\projects\d500907 (v8)\70639cover.d PLOT SCALE = 63:5394 / IN,