SIGN DETAIL

1:80

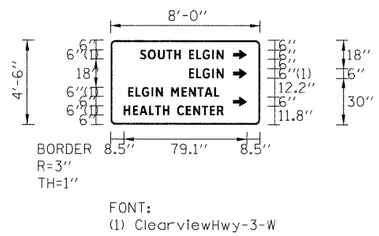

SIGN NUMBER	WB-20-WP-100	
WIDTH x HGHT.	8'-0" x 4'-6"	
BORDER WIDTH	1"	
CORNER RADIUS	3"	
MOUNTING	Ground	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
ARUP	270	78.5	42	6	9
ARUP	270	78.5	30	6	9
ARUP	270	78.5	11.8	6	9

Panel Style: guide_con_destination.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																						LENGTH	SERIES/SIZE
S	O	U	T	H		E	L	G	I	N																													ClearviewHwy-3-W
18.9	23.9	30.5	35.9	40.9	45	50.4	55.1	59.2	65.3	68.1																												53.6	6
E	L	G	I	N																																			ClearviewHwy-3-W
50.4	55.1	59.2	65.3	68.1																																		22.2	6
E	L	G	I	N		M	E	N	T	A	L																												ClearviewHwy-3-W
11.3	16	20.2	26.3	29.1	33.5	38.9	45.6	50.3	55.9	60.4	66.7																											58.4	6
H	E	A	L	T	H		C	E	N	T	E	R																											ClearviewHwy-3-W
8.5	14.3	18.5	24.8	28.6	33.6	37.7	42.8	48.4	53.1	58.8	63.8	68.5																										64	6

FILE NAME = P:\2009\ME09006_VarVar PhII\CADD\W021_US20\Base\D160M46-DHSign03.dgn
PLOT SCALE = 4.0000 ' / IN.
USER NAME = Millennia Professional Services

200 22ND Street, Suite 216, Lombard, IL 60148
630.705.0110 voice, 630.839.2566 fax
www.mps-il.com
MILLENNIA PROFESSIONAL SERVICES

DESIGNED -	CJD	REVISED -	
DRAWN -	CJD	REVISED -	
CHECKED -	TVN	REVISED -	
DATE -	4/4/2011	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

US ROUTE 20 (LAKE STREET)
RANDALL RD TO SHALES PARKWAY

SCALE: · SHEET NO. OF SHEETS STA. TO STA.

SIGN DETAILS
STA 305+77

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
345	8R-1-RS-4	KANE/COOK	124	56
		CONTRACT NO. 60M46		

FED. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT

P:\2009\ME09006_VarVar PhII\CADD\W021_US20\Base\D160M46-DHSign03.dgn