ROUTE	SECTION	COUNTY	SHEET	SHEETS
CH		LAKE		
TYPICAL PAVEMENT MARKINGS				
- - -		ILLINOIS		

TYPICAL PAVEMENT MARKINGS

TYPICAL MINI-SKIP PAVEMENT MARKINGS

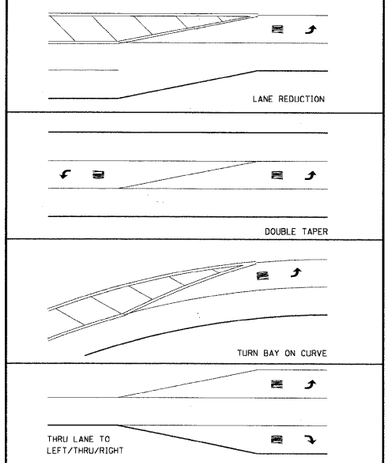

MINI-SKIPS ARE 2 FEET WHITE LINE WITH 6 FEET SPACING. THE MINI-SKIP IS THE SAME WIDTH AS THE PAVEMENT MARKING LINE, IT EXTENDS.

TYPCIAL TURN BAY PAVEMENT MARKINGS

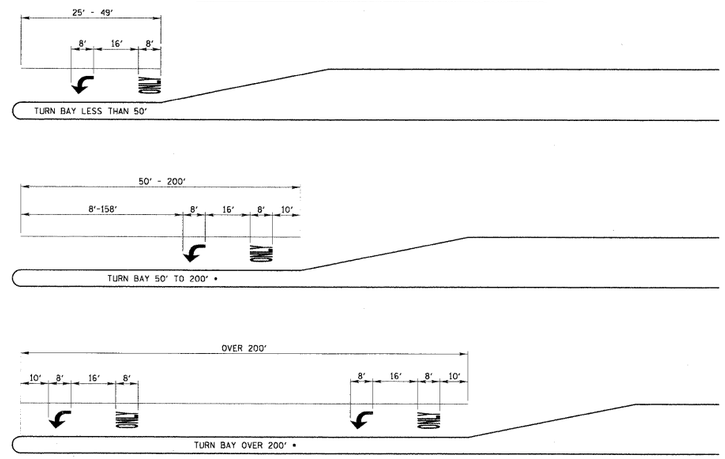

AREA = 15.6 SQ. FT.

ONLY AREA = 20.8 SQ FT.

* AT INTERSECTIONS WITH VIDEO DETECTION, THE ARROW AND ONLY PAVEMENT MARKINGS SHALL BE A MINIMUM OF 30' BEHIND THE STOP BAR.

FULL SIZE LETTERS (8') AND ARROWS SHALL BE USED. TURN LANES IN EXCESS OF 400' IN LENGTH MAY HAVE AN ADDITIONAL SET OF ARROW W/ "ONLY" INSTALLED MIDWAY BETWEEN THE OTHER TWO SETS OF ARROW W/ "ONLY".

EDGE LINE RADII AT SIDE STREETS

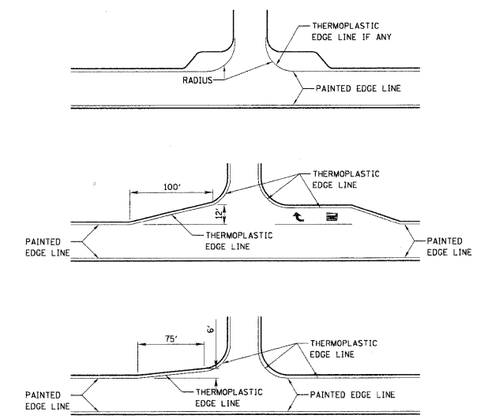

TYPICAL DIAGONAL SPACING

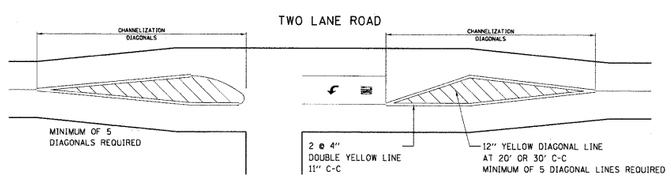

DIAGONAL SPACING

SPEED LIMIT RANGE	CONTINUOUS	INTERSECTION CHANNELIZATION
30-45 MPH	75 FT.	20 FT.
OVER 45 MPH	150 FT.	30 FT.

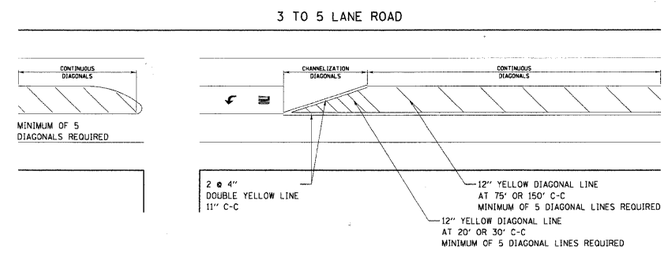

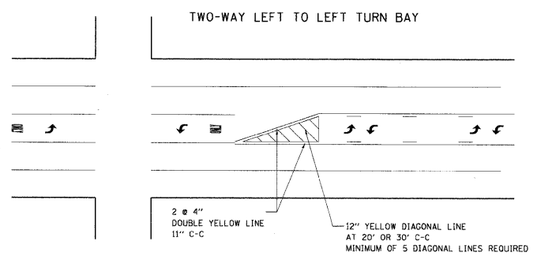

DUAL LEFT TURN ARROWS



31.2 SQ. FT. MINIMUM OF 2 SETS REQUIRED

A MINIMUM OF TWO PAIRS OF DUAL LEFT TURN ARROWS SHALL BE USED. THE DUAL LEFT TURN ARROWS SHALL BE WHITE IN COLOR. THE INTERVAL BETWEEN SETS OF DUAL LEFT TURN ARROWS SHOULD BE 200' AND 300'.

REVISIONS	
NAME	DATE
JOHN SAUTER	7/7/99
JOHN SAUTER	11/01/0
JOHN SAUTER	5/4/05

LakeCounty Division of Transportation

TYPICAL PAVEMENT MARKINGS FOR COUNTY HIGHWAYS

SCALE: NONE SHEET 1 OF 3 DRAWN BY: JPS
DATE: JAN. 12, 1998 CHECKED BY: ANK

COPYRIGHT © 2005, BY BAXTER & WOODMAN, INC.
STATE OF ILLINOIS PROFESSIONAL DESIGN FIRM
LICENSE NO. 184-001190 EXPIRES 4/30/09
522-Km
...\plotdrv\pc9522a34.pl
10:01:51 090803 jpsmith
\\Corp.baxwood.com\projects\Crystal Lake\BFGVV\C90803-MainSt\LAPP\CADD-SURVEY\DRAWINGS\DGNS\090803-PAVEMENT MARKINGS.DGN
10/3/2009 2:53:49 PM

BAXTER & WOODMAN Consulting Engineers

DESIGNED - DSH	REVISED-10-09-09 PER IDOT REVIEW	
DRAWN - KAR	REVISED-	
CHECKED - RWL	REVISED-	
DATE - 10-09-09	FILE - 090803-PAVEMENT MARKINGS.SHT	

VILLAGE OF BUFFALO GROVE, ILLINOIS
MAIN STREET ARRA (LAPP)
RESURFACING

LAKE COUNTY TYPICAL PAVEMENT MARKINGS

SCALE: STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2666	09-00096-00-RS	LAKE	18	17
C-91-126-10		CONTRACT NO. 63367		
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT ARA-9003(507)		