
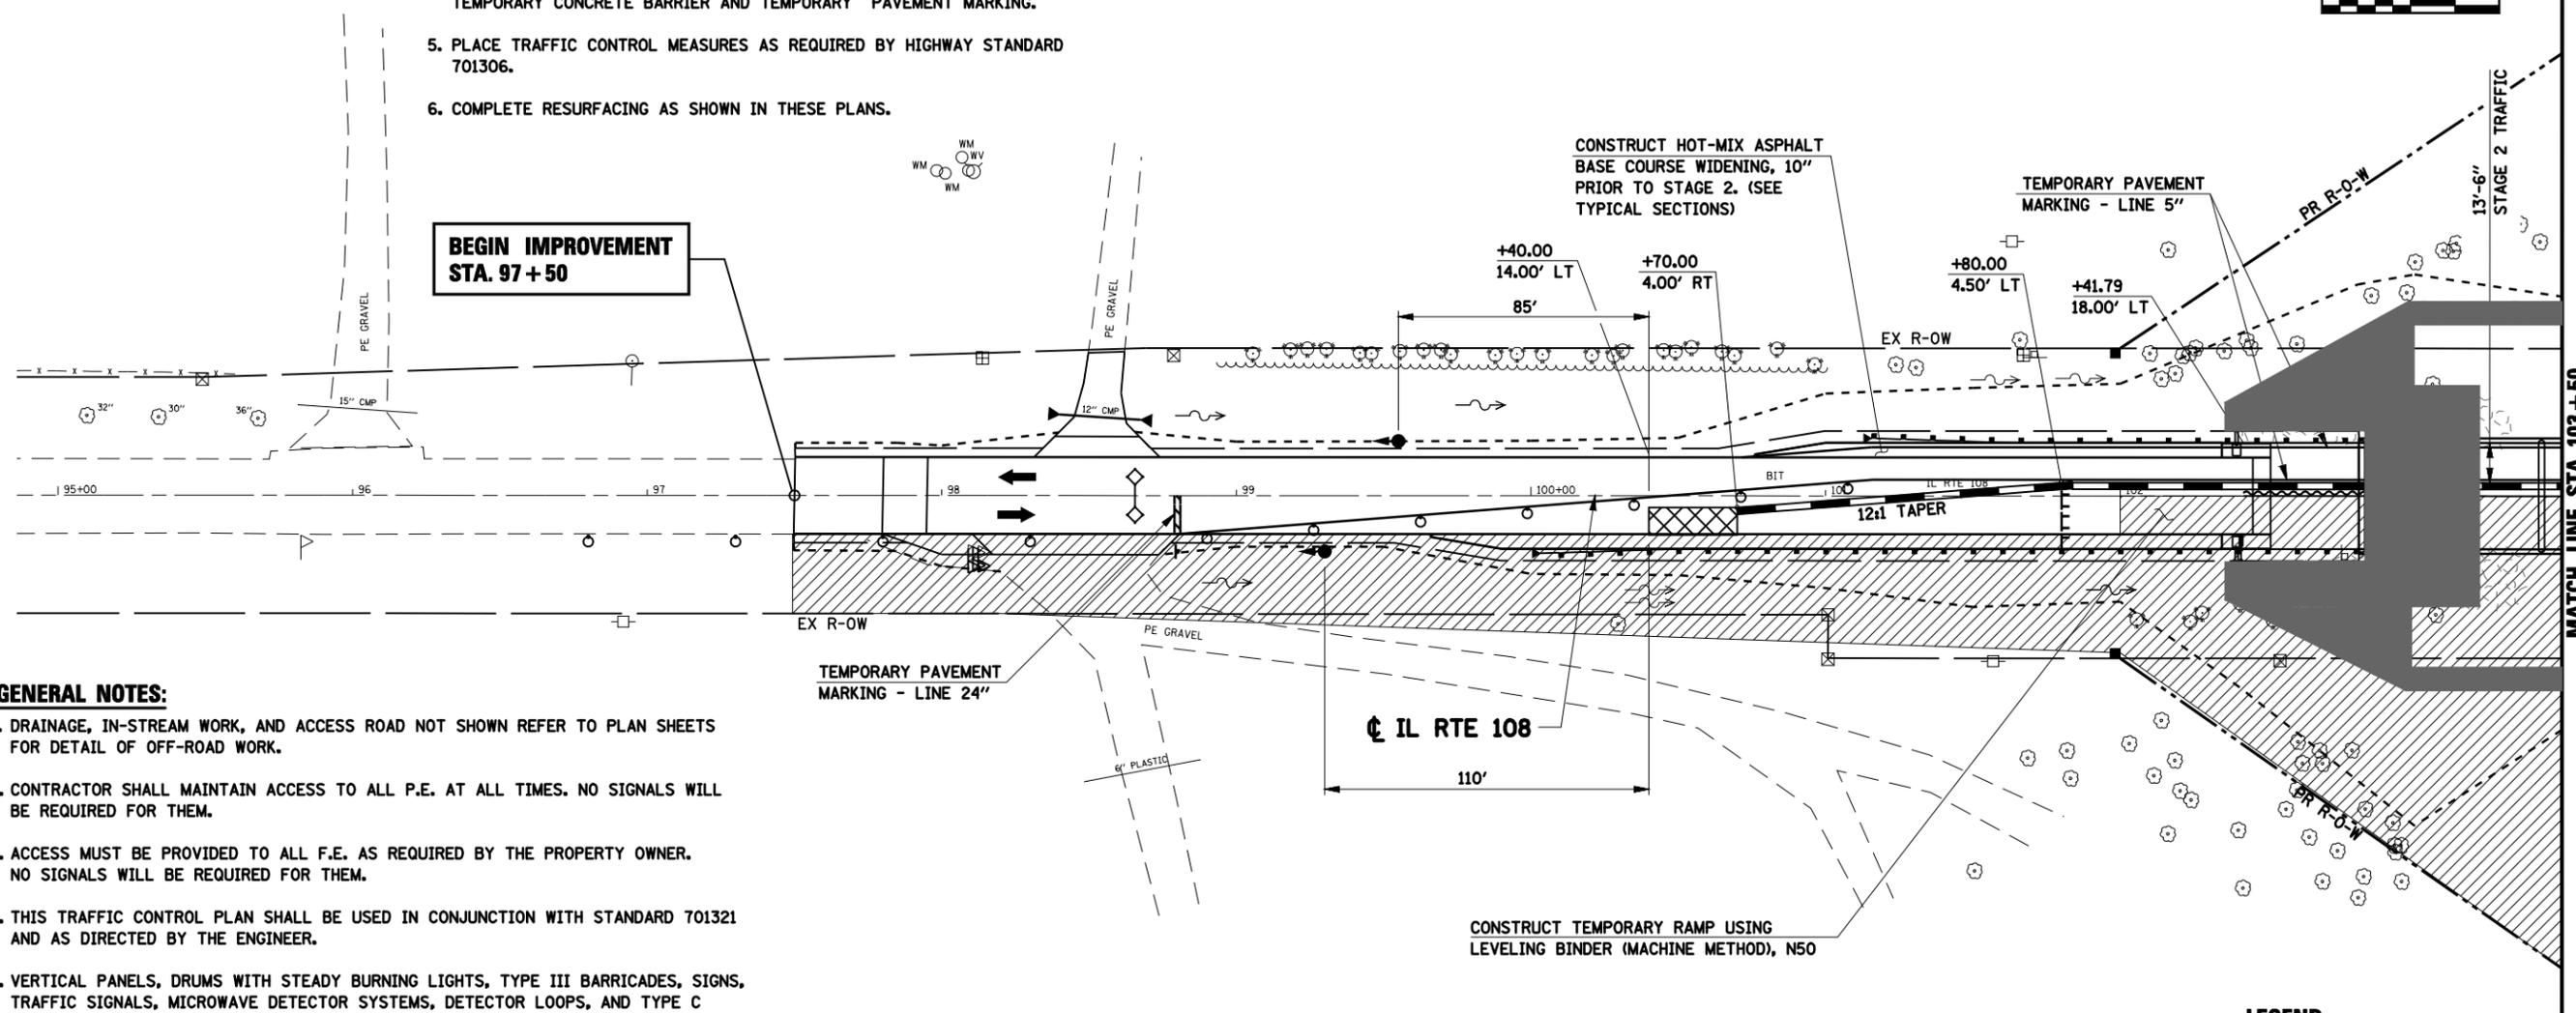


STAGE 2 SEQUENCE OF CONSTRUCTION

1. RELOCATE TEMPORARY CONCRETE BARRIER & ATTENUATORS AND PUT IN PLACE OTHER TRAFFIC CONTROL MEASURES FOR STAGE 2 CONSTRUCTION AS REQUIRED BY HIGHWAY STANDARD 701321.
2. COMPLETE ALL STAGE 2 CONSTRUCTION WORK, PAVEMENT, GUARDRAIL REMOVAL & REPLACEMENT, DRAINAGE WORK AND STAGE 2 STRUCTURAL WORK SHOWN IN THESE PLANS.
3. CONSTRUCT TEMPORARY RAMPS AT ENDS OF STAGE 2 BRIDGE APPROACH PAVEMENT.
4. REMOVE TEMPORARY TRAFFIC CONTROL DEVICES FOR STAGE 2, INCLUDING TEMPORARY CONCRETE BARRIER AND TEMPORARY PAVEMENT MARKING.
5. PLACE TRAFFIC CONTROL MEASURES AS REQUIRED BY HIGHWAY STANDARD 701306.
6. COMPLETE RESURFACING AS SHOWN IN THESE PLANS.

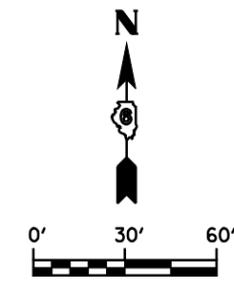

GENERAL NOTES:

1. DRAINAGE, IN-STREAM WORK, AND ACCESS ROAD NOT SHOWN REFER TO PLAN SHEETS FOR DETAIL OF OFF-ROAD WORK.
2. CONTRACTOR SHALL MAINTAIN ACCESS TO ALL P.E. AT ALL TIMES. NO SIGNALS WILL BE REQUIRED FOR THEM.
3. ACCESS MUST BE PROVIDED TO ALL F.E. AS REQUIRED BY THE PROPERTY OWNER. NO SIGNALS WILL BE REQUIRED FOR THEM.
4. THIS TRAFFIC CONTROL PLAN SHALL BE USED IN CONJUNCTION WITH STANDARD 701321 AND AS DIRECTED BY THE ENGINEER.
5. VERTICAL PANELS, DRUMS WITH STEADY BURNING LIGHTS, TYPE III BARRICADES, SIGNS, TRAFFIC SIGNALS, MICROWAVE DETECTOR SYSTEMS, DETECTOR LOOPS, AND TYPE C BIDIRECTIONAL REFLECTORS SHALL BE INCLUDED IN THE COST OF THE PAY ITEM "TRAFFIC CONTROL AND PROTECTION, STANDARD 701321 (SPECIAL)".
6. THE CONTRACTOR SHALL PROVIDE AND ERECT LANE WIDTH AND LOAD RESTRICTION SIGNING. THESE SIGNS SHALL BE PLACED AS DIRECTED BY THE ENGINEER BEFORE IMPLEMENTING ANY STAGE TRAFFIC CONTROL. (SEE LOAD RESTRICTION DETOUR MAP)
7. REMOVE ANY CONFLICTING PAVEMENT MARKINGS.
8. THE CONTRACTOR SHALL NOTIFY THE DISTRICT 6 TRAFFIC SECTION OF THE BUREAU OF OPERATIONS PH: (217) 785-5836 AT LEAST 21 DAYS PRIOR TO IMPLEMENTING STAGE TRAFFIC CONTROL AND WHEN EVER A SWITCH IN STAGING IS MADE.
9. THE CONTRACTOR SHALL NOTIFY THE DISTRICT 6 TRAFFIC SECTION OF THE BUREAU OF OPERATIONS AT LEAST THREE (3) DAYS PRIOR TO ACTIVATING THE TEMPORARY TRAFFIC SIGNALS. PLEASE REFER TO THE DISTRICT 6 SPECIAL PROVISIONS FOR TEMPORARY BRIDGE TRAFFIC SIGNALS FOR CONTACT INFORMATION.

LEGEND

- WORK AREA
- SIGN
- DRUM WITH STEADY BURNING LIGHT
- TRAFFIC SIGNAL
- TEMPORARY CONCRETE BARRIER
- IMPACT ATTENUATOR, TEMPORARY
- DIRECTION OF TRAFFIC
- TYPE III BARRICADE
- LOOP DETECTORS

NOTE:
SEE "PROFILES" FOR TEMPORARY RAMP PLACED THIS STAGE.

FILE NAME = C:\Projects\4653603\ve_fina1\8006mot2.01.sht	USER NAME = laughl1n1	DESIGNED -	REVISED -
PLOT SCALE = 60.0000' / IN.	CHECKED -	DRAWN - AAD	REVISED -
PLOT DATE = May-15-2008 03:16:31PM	DATE - 10-22-07		REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**MAINTENANCE OF TRAFFIC
STAGE 2**

SCALE: 1"=30' SHEET NO. OF SHEETS STA. 97+00 TO STA. 103+50

F.A.P. RTE. 769	SECTION 110B-2	COUNTY MACOUPIN	TOTAL SHEETS 98	SHEET NO. 19
CONTRACT NO. 72813				
FED. ROAD DIST. NO. 6 ILLINOIS FED. AID PROJECT				

MATCH LINE STA. 103+50