
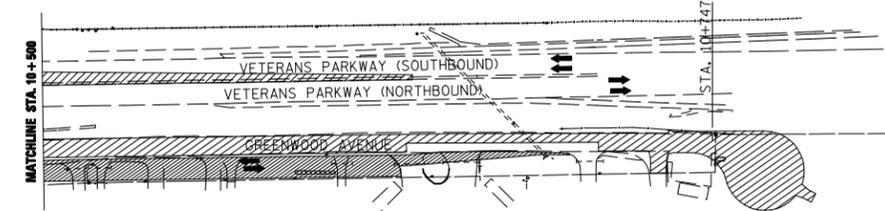
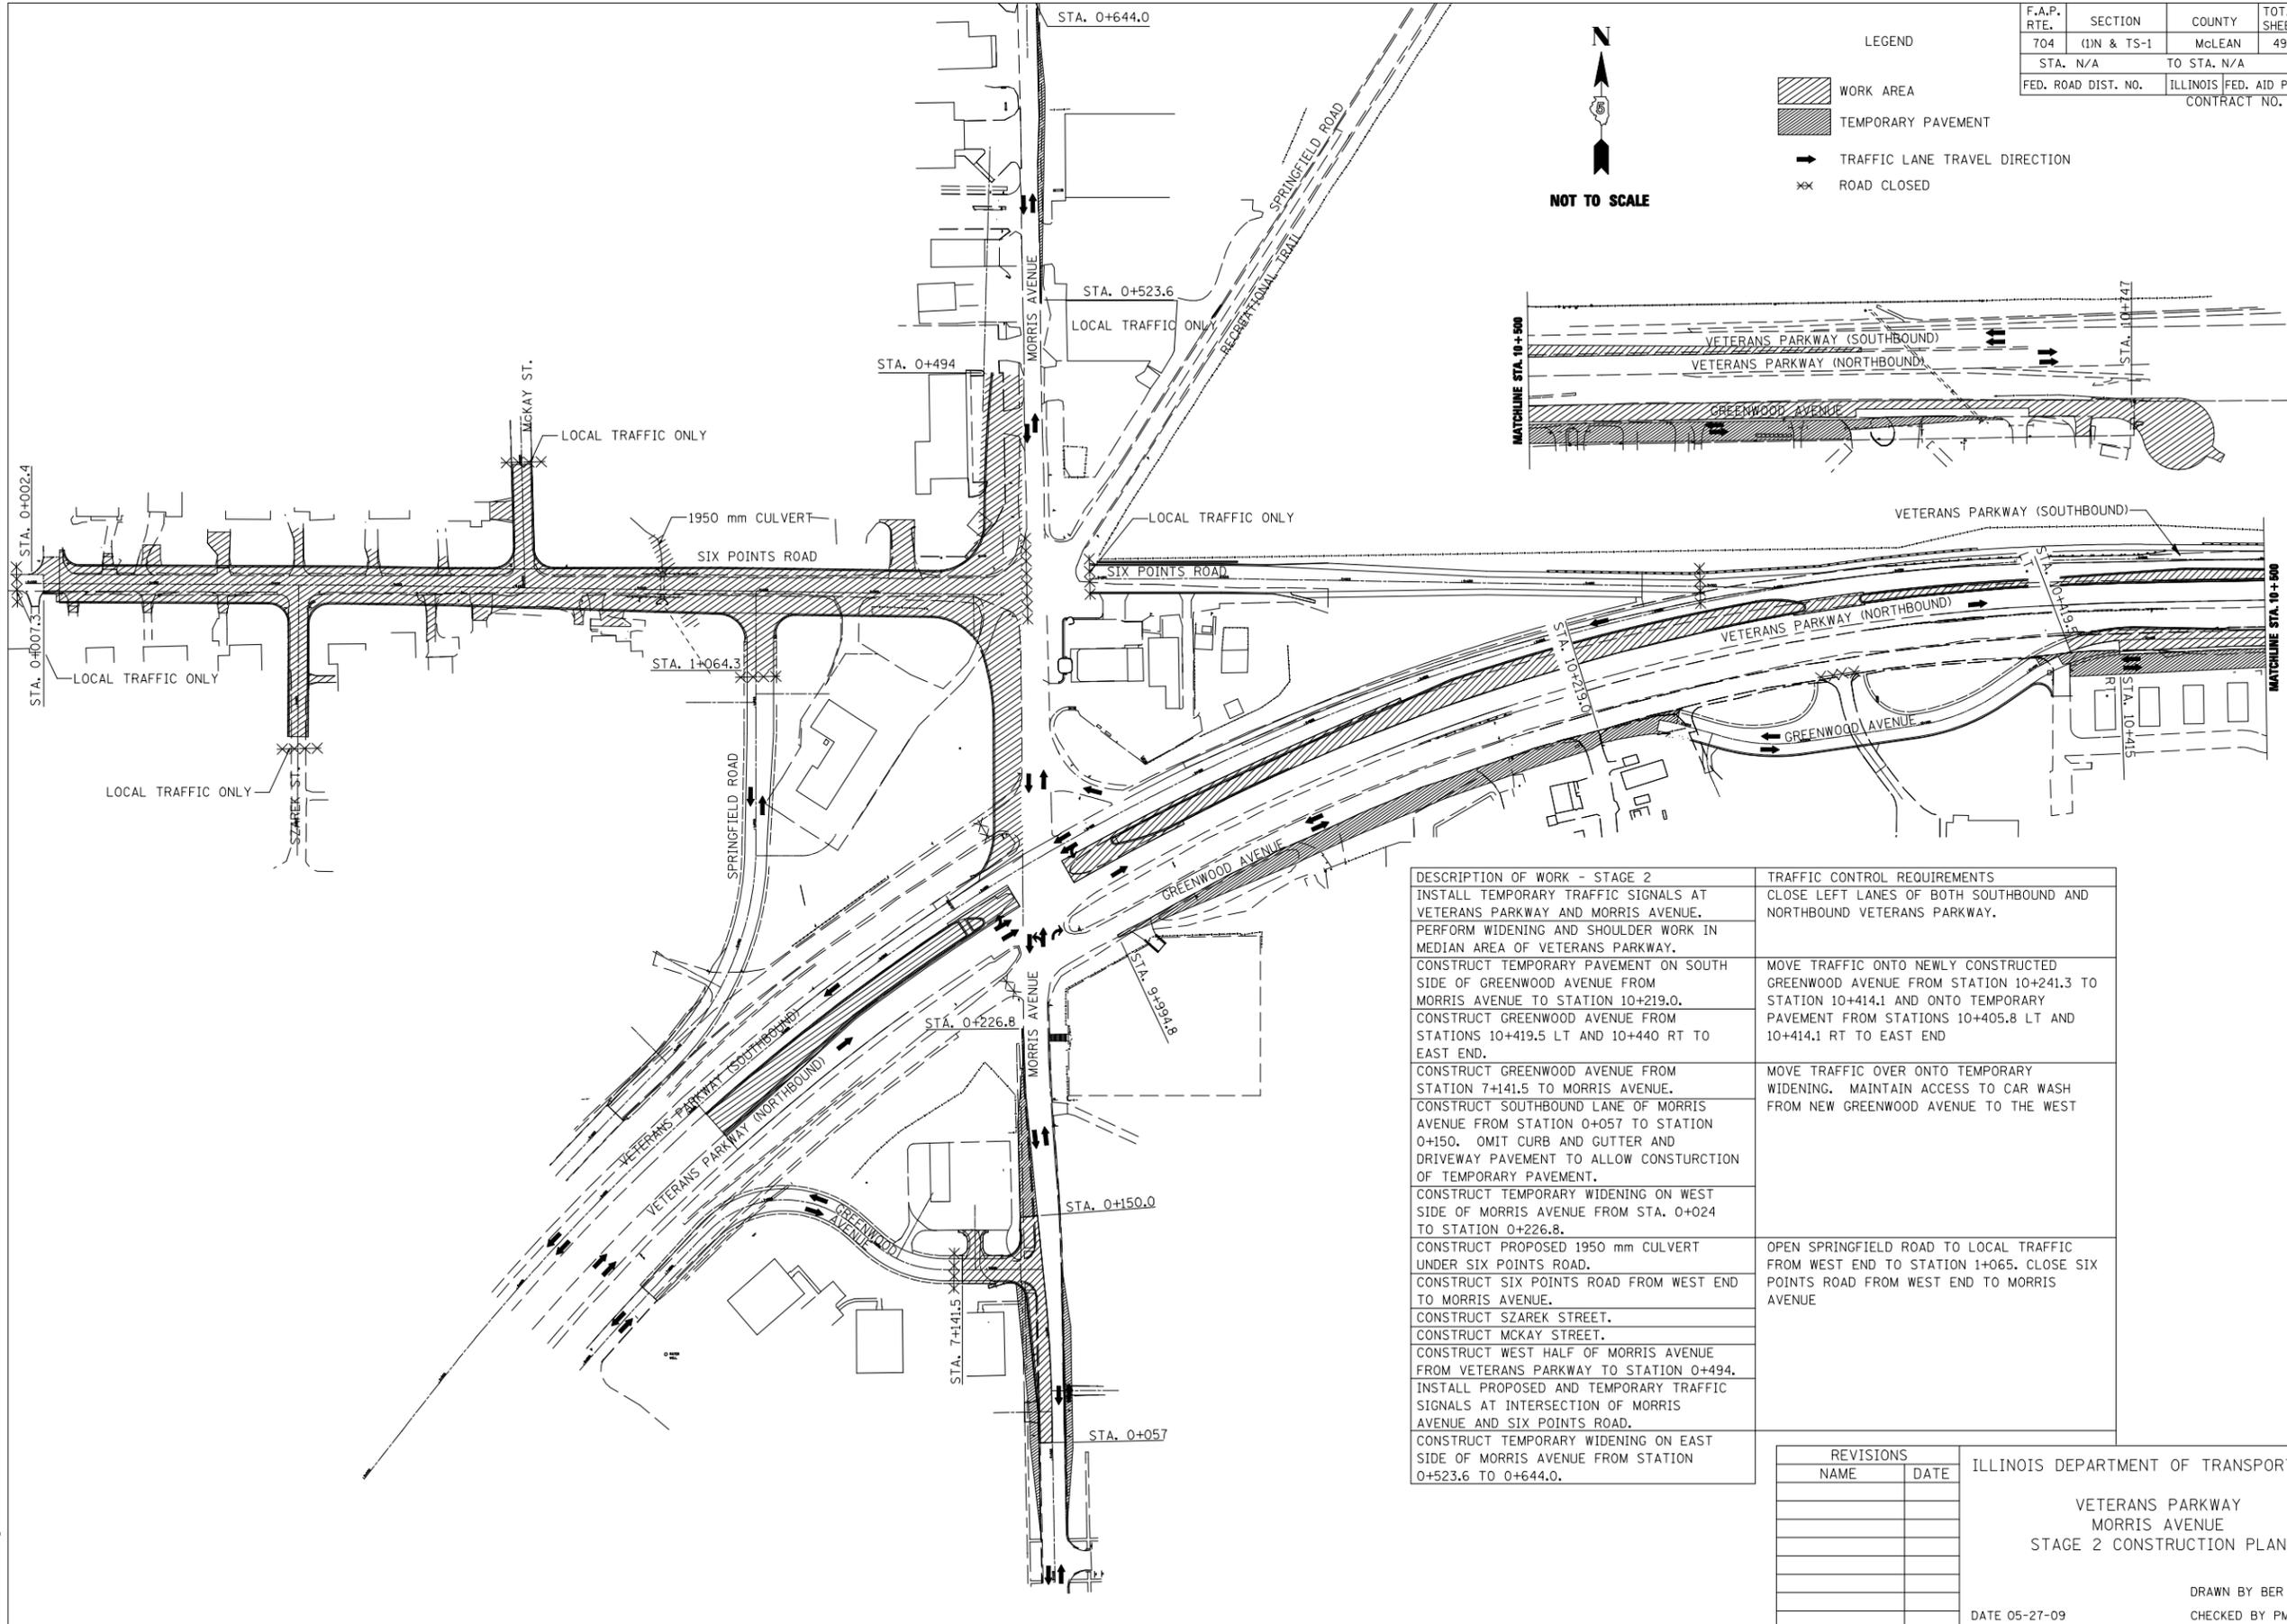


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
704	(1)N & TS-1	McLEAN	497	99
STA. N/A	TO STA. N/A			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT	CONTRACT NO. 70514	

- LEGEND
- WORK AREA
 - TEMPORARY PAVEMENT
 - TRAFFIC LANE TRAVEL DIRECTION
 - ROAD CLOSED



DESCRIPTION OF WORK - STAGE 2	TRAFFIC CONTROL REQUIREMENTS
INSTALL TEMPORARY TRAFFIC SIGNALS AT VETERANS PARKWAY AND MORRIS AVENUE. PERFORM WIDENING AND SHOULDER WORK IN MEDIAN AREA OF VETERANS PARKWAY.	CLOSE LEFT LANES OF BOTH SOUTHBOUND AND NORTHBOUND VETERANS PARKWAY.
CONSTRUCT TEMPORARY PAVEMENT ON SOUTH SIDE OF GREENWOOD AVENUE FROM MORRIS AVENUE TO STATION 10+219.0.	MOVE TRAFFIC ONTO NEWLY CONSTRUCTED GREENWOOD AVENUE FROM STATION 10+241.3 TO STATION 10+414.1 AND ONTO TEMPORARY PAVEMENT FROM STATIONS 10+405.8 LT AND 10+414.1 RT TO EAST END
CONSTRUCT GREENWOOD AVENUE FROM STATIONS 10+419.5 LT AND 10+440 RT TO EAST END.	
CONSTRUCT GREENWOOD AVENUE FROM STATION 7+141.5 TO MORRIS AVENUE.	MOVE TRAFFIC OVER ONTO TEMPORARY WIDENING. MAINTAIN ACCESS TO CAR WASH FROM NEW GREENWOOD AVENUE TO THE WEST
CONSTRUCT SOUTHBOUND LANE OF MORRIS AVENUE FROM STATION 0+057 TO STATION 0+150. OMIT CURB AND GUTTER AND DRIVEWAY PAVEMENT TO ALLOW CONSTRUCTION OF TEMPORARY PAVEMENT.	
CONSTRUCT TEMPORARY WIDENING ON WEST SIDE OF MORRIS AVENUE FROM STA. 0+024 TO STATION 0+226.8.	
CONSTRUCT PROPOSED 1950 mm CULVERT UNDER SIX POINTS ROAD.	OPEN SPRINGFIELD ROAD TO LOCAL TRAFFIC FROM WEST END TO STATION 1+065. CLOSE SIX POINTS ROAD FROM WEST END TO MORRIS AVENUE
CONSTRUCT SIX POINTS ROAD FROM WEST END TO MORRIS AVENUE.	
CONSTRUCT SZAREK STREET.	
CONSTRUCT MCKAY STREET.	
CONSTRUCT WEST HALF OF MORRIS AVENUE FROM VETERANS PARKWAY TO STATION 0+494.	
INSTALL PROPOSED AND TEMPORARY TRAFFIC SIGNALS AT INTERSECTION OF MORRIS AVENUE AND SIX POINTS ROAD.	
CONSTRUCT TEMPORARY WIDENING ON EAST SIDE OF MORRIS AVENUE FROM STATION 0+523.6 TO 0+644.0.	

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

VETERANS PARKWAY
MORRIS AVENUE
STAGE 2 CONSTRUCTION PLAN

DATE 05-27-09

DRAWN BY BER
CHECKED BY PMH

PLOT DATE = 8/2/2010
 PLOT SCALE = 62.5000' / IN.
 USER NAME = craigie