
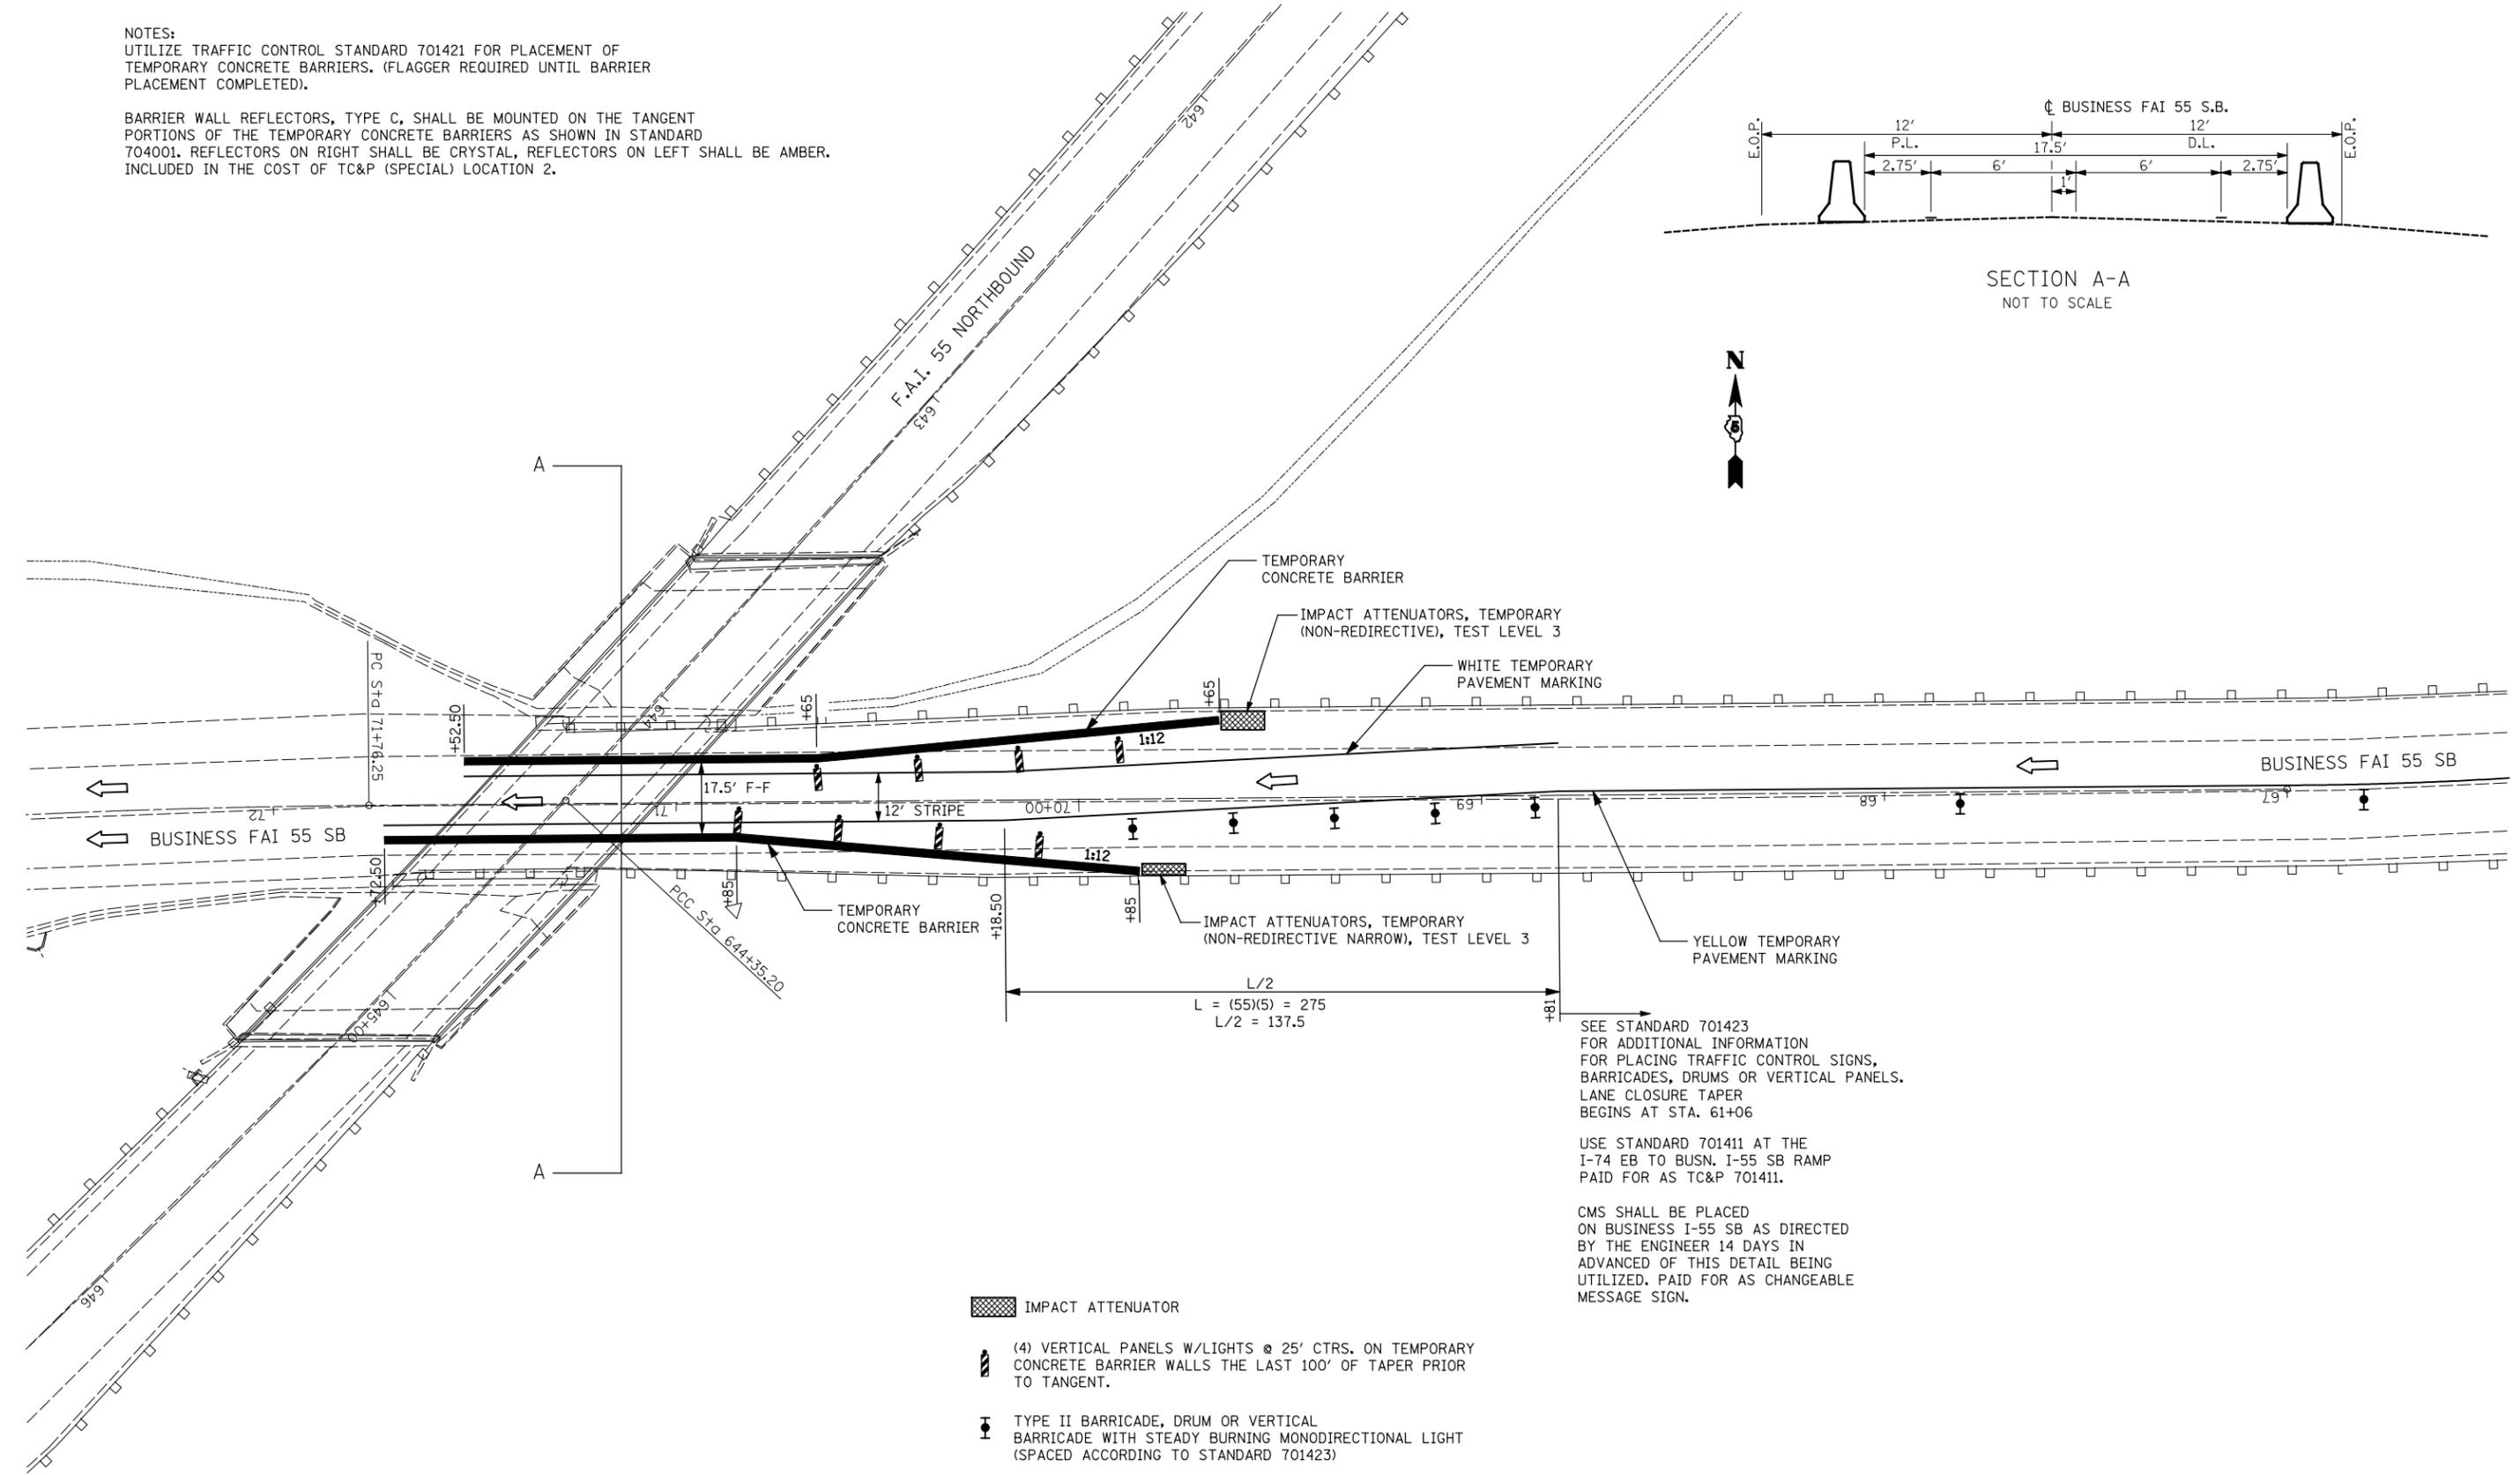


NOTES:
 UTILIZE TRAFFIC CONTROL STANDARD 701421 FOR PLACEMENT OF TEMPORARY CONCRETE BARRIERS. (FLAGGER REQUIRED UNTIL BARRIER PLACEMENT COMPLETED).

BARRIER WALL REFLECTORS, TYPE C, SHALL BE MOUNTED ON THE TANGENT PORTIONS OF THE TEMPORARY CONCRETE BARRIERS AS SHOWN IN STANDARD 704001. REFLECTORS ON RIGHT SHALL BE CRYSTAL, REFLECTORS ON LEFT SHALL BE AMBER. INCLUDED IN THE COST OF TC&P (SPECIAL) LOCATION 2.

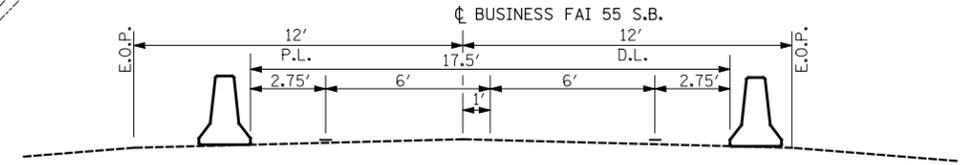

SEE STANDARD 701423 FOR ADDITIONAL INFORMATION FOR PLACING TRAFFIC CONTROL SIGNS, BARRICADES, DRUMS OR VERTICAL PANELS. LANE CLOSURE TAPER BEGINS AT STA. 61+06

USE STANDARD 701411 AT THE I-74 EB TO BUSN. I-55 SB RAMP PAID FOR AS TC&P 701411.

CMS SHALL BE PLACED ON BUSINESS I-55 SB AS DIRECTED BY THE ENGINEER 14 DAYS IN ADVANCED OF THIS DETAIL BEING UTILIZED. PAID FOR AS CHANGEABLE MESSAGE SIGN.

-  IMPACT ATTENUATOR
-  (4) VERTICAL PANELS W/LIGHTS @ 25' CTRS. ON TEMPORARY CONCRETE BARRIER WALLS THE LAST 100' OF TAPER PRIOR TO TANGENT.
-  TYPE II BARRICADE, DRUM OR VERTICAL BARRICADE WITH STEADY BURNING MONODIRECTIONAL LIGHT (SPACED ACCORDING TO STANDARD 701423)

FILE NAME = ... \D570520-shr-TCPI(Special).dgn  Johnson, Depp & Quisenberry CONSULTING ENGINEERS Springfield, Illinois	USER NAME = SJS	DESIGNED - DRAWN -	REVISED - REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TRAFFIC CONTROL AND PROTECTION (SPECIAL) LOCATION 2				F.A.I. RTE. = 55	SECTION = (57-7HB-2 & 57-7HB-1)BR	COUNTY = MCLEAN	TOTAL SHEETS = 153	SHEET NO. = 44
	PLOT SCALE = 40.0000' / IN. PLOT DATE = 08/09/2010 10:55:52	CHECKED - DATE -	REVISED - REVISED -		REVISED - REVISED -	SCALE:	SHEET NO.	OF SHEETS	STA.	TO STA.	CONTRACT NO. 70520 ILLINOIS FED. AID PROJECT		