
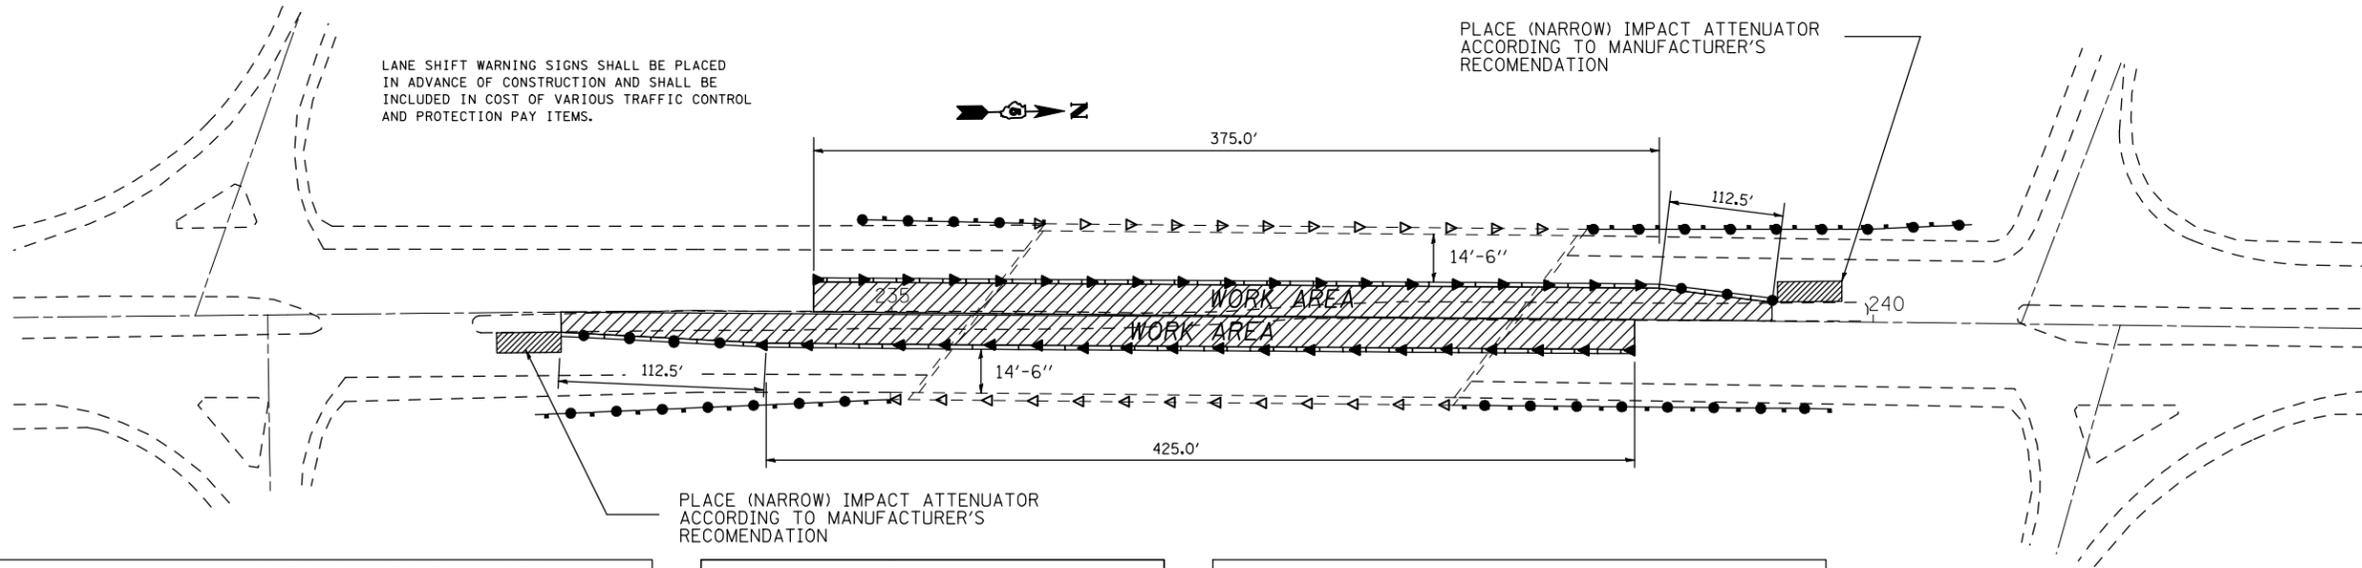


STAGE II CONSTRUCTION

70400200 RELOCATE TEMPORARY CONCRETE BARRIER

STAGE II CONSTRUCTION			
NORTHBOUND			
TANGENT	234+65.62	238+90.62	425.0
TAPER	233+54.02	234+65.62	112.5
SOUTHBOUND			
TANGENT	234+71.21	238+46.21	375.0
TAPER	238+46.21	239+57.71	112.5
TOTAL =			1025.0

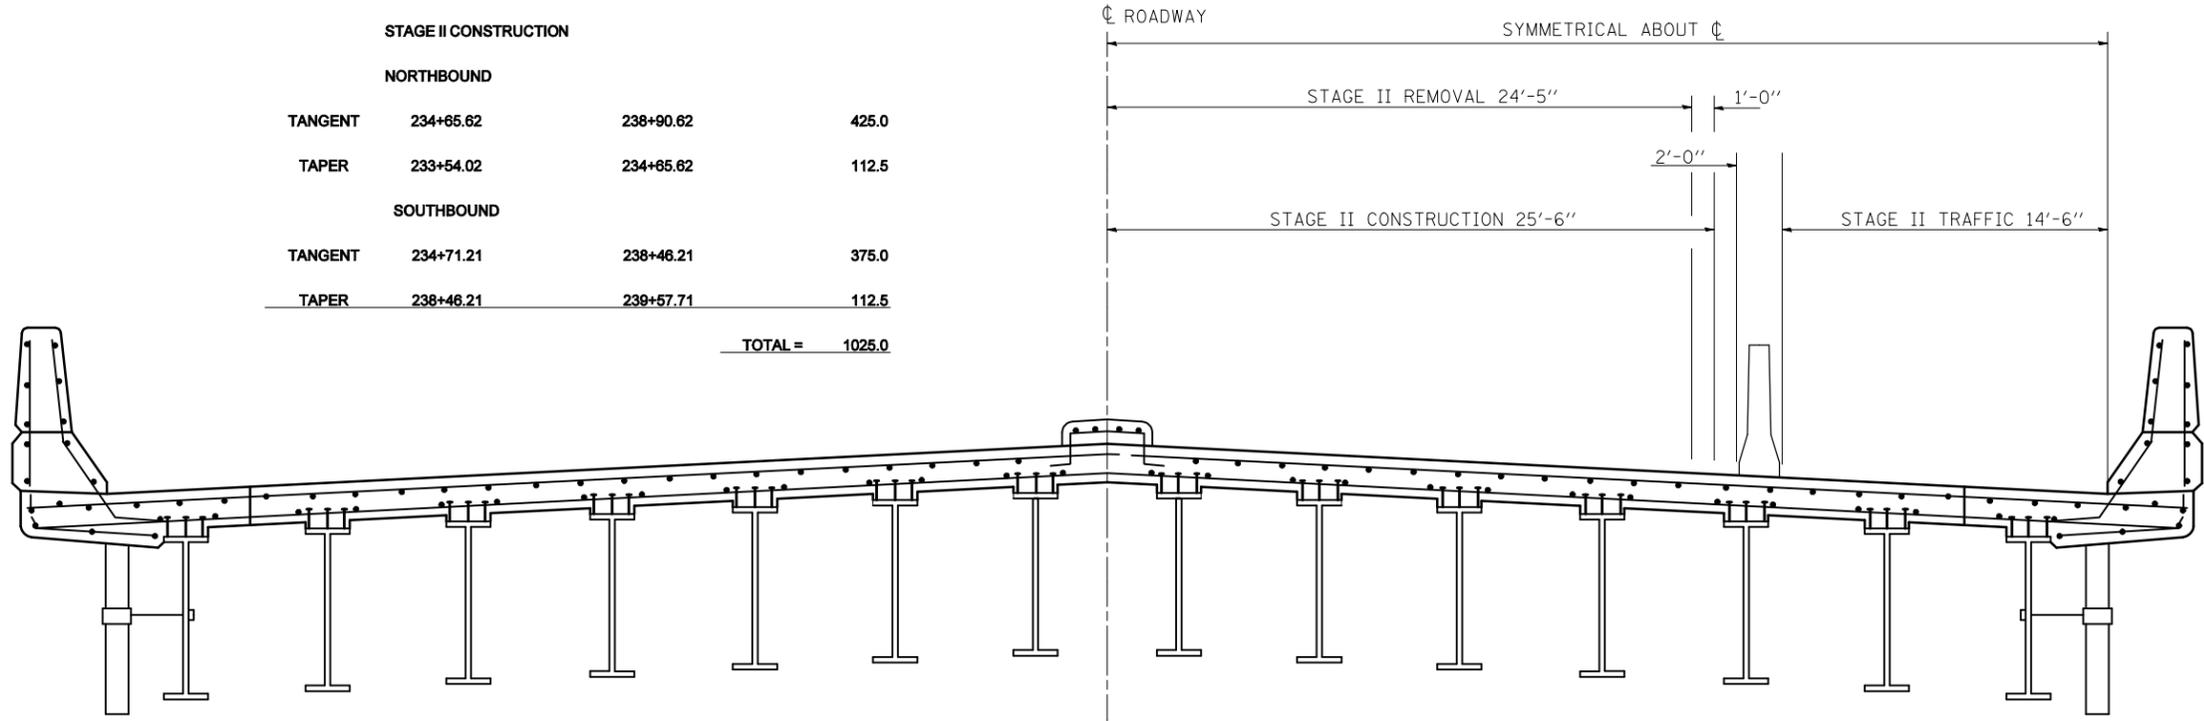

PLAN NOTES:

ALL STAGING DETAILS SET UP IN ACCORDANCE WITH TRAFFIC CONTROL AND PROTECTION 701422.

PRIOR TO BARRIER PLACEMENT TRAFFIC CONTROL SHALL BE SET UP IN ACCORDANCE WITH STANDARD 701423.

TRAFFIC CONTROL DETAILS NOT SHOWN ARE TO CONFORM WITH STANDARD 701422 AND 701423.

MESSAGE BOARD SHALL BE PLACED TWO WEEKS PRIOR TO CONSTRUCTION AND MAY BE ADJUSTED TO MEET FIELD CONDITIONS.

RESIDENT ENGINEER AND TRAFFIC CONTROL SUPERVISOR SHALL PROVIDE APPROPRIATE MESSAGE FOR CMS.

ABSORB 350 IMPACT ATTENUATOR WILL NOT BE ALLOWED

RAISED REFLECTIVE PAVEMENT MARKERS AFFECTED BY THE PROPOSED CONSTRUCTION SHALL BE REPLACED. THIS COST SHALL BE INCIDENTAL TO THE VARIOUS TRAFFIC CONTROL PAY ITEMS.


REFLECTORS AND VERTICAL PANELS FOR BARRIER WALL, BRIDGE RAIL AND GUARDRAIL SHALL BE INCLUDED IN THE COST FOR THE APPLICABLE TRAFFIC CONTROL PAY ITEMS.

ATTACH VERTICAL PANELS TO THE LEFT GUARDRAIL AT 25 FOOT CENTERS DURING STAGE II. THIS COST WILL BE INCIDENTAL TO STANDARD 701423.

REFLECTORIZED TEMPORARY MARKING TAPE SHALL BE PLACED THROUGHOUT THE TAPER AND ALONG-SIDE THE WORK AREA. THE EDGE LINE SHALL BE YELLOW FOR LEFT LANE CLOSURES. COST FOR THE PLACEMENT AND REMOVAL SHALL BE INCLUDED IN COST FOR APPLICABLE TRAFFIC CONTROL PAY ITEM.

SYMBOLS

- ◀ AMBER MONODIRECTIONAL REFLECTOR 25' CTS
- ◁ CRYSTAL MONODIRECTIONAL REFLECTOR 25' CTS
- TEMPORARY CONCRETE BARRIER
- VERTICAL PANELS WITH STEADY BURNING LIGHTS ALONG TAPER 25' CTS
- ⊗ IMPACT ATTENUATOR

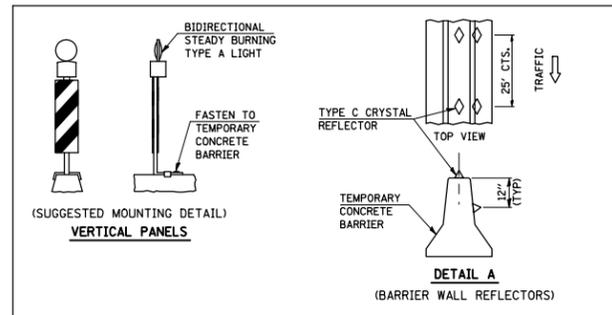

ANY ADJUSTMENTS, VARIATIONS OR CHANGES IN THE TRAFFIC CONTROL SHALL BE CONSIDERED AS INCIDENTAL TO 701422 AND 701423 AND NO ADDITIONAL COMPENSATION SHALL BE ALLOWED.

NOT TO SCALE

FILE NAME =	USER NAME = shererjm	DESIGNED - JMS	REVISED -
et:\pw\work\PIWIDOT\SHERERJM\d0143296\0510807-shit-staging.dgn		DRAWN - JMS	REVISED -
	PLOT SCALE = 100.0000' / IN.	CHECKED - JMS	REVISED -
	PLOT DATE = 8/18/2009	DATE - 070109	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

TRAFFIC CONTROL STAGING DETAILS

SCALE: NO SCALE SHEET NO. 2 OF 2 SHEETS STA. TO STA.

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2466	(57-18)BJR	MCLEAN	17	8
CONTRACT NO. 70807				
ILLINOIS FED. AID PROJECT				