


**DESCRIPTION OF INTENDED SEQUENCE OF MAJOR CONSTRUCTION ACTIVITIES WHICH WILL DISTURB EARTH AND LEAD TO POSSIBLE EROSION FOR MAJOR PORTIONS OF THE CONSTRUCTION SITE:**

1. PLACEMENT OF PERIMETER EROSION CONTROL FENCE PRIOR TO THE COMMENCEMENT OF ANY ROAD OR BRIDGE WORK. SEE STD. 280001.
2. REMOVAL OF EXISTING STRUCTURE.
3. CONSTRUCTION OF THE REPLACEMENT STRUCTURE.
4. PLACEMENT OF ROADWAY EMBANKMENT TO RAISE THE ROADWAY TO THE PROPOSED GRADE.
5. DRAINAGE STRUCTURES, INCLUDING DITCHES, WILL BE INSTALLED BEFORE AND/OR DURING THE COMPLETION OF THE EMBANKMENT.
6. PLACEMENT AND MAINTENANCE OF TEMPORARY EROSION CONTROL.
7. PLACEMENT OF PERMANENT EROSION CONTROL.
8. REMOVAL AND PROPER CLEAN UP OF TEMPORARY EROSION CONTROL.
9. FINAL GRADING, PLACING AGGREGATE AND OTHER MISCELLANEOUS ITEMS.

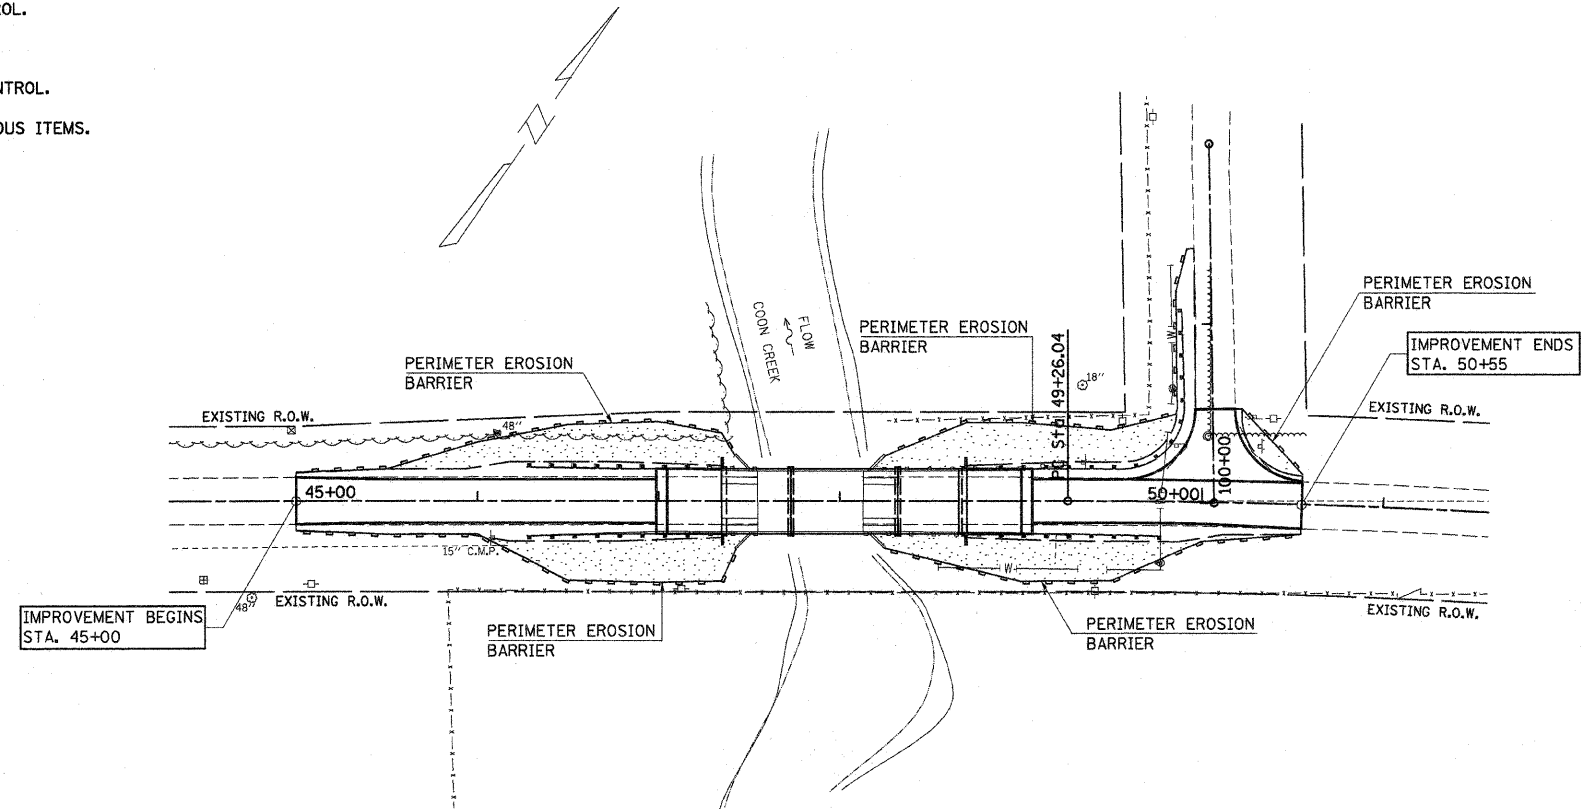

TEMPORARY EROSION CONTROL:	
	PERIMETER EROSION BARRIER
PERMANENT EROSION CONTROL:	
	SEEDING CLASS 2, FERTILIZERS, & MULCH, METHOD 2

**TEMPORARY EROSION CONTROL SEEDING**

LT. STA. 45+00 TO LT. STA. 47+43	= 11 POUND
RT. STA. 45+00 TO RT. STA. 47+43	= 10 POUND
LT. STA. 48+25 TO LT. STA. 49+97	= 12 POUND
LT. STA. 50+19 TO LT. STA. 50+55	= 1 POUND
RT. STA. 48+25 TO RT. STA. 50+55	= 11 POUND
<b>TOTAL</b>	<b>= 45 POUND</b>

**PERIMETER EROSION BARRIER**

LT. STA. 45+00 TO LT. STA. 47+43	= 253 FOOT
RT. STA. 45+00 TO RT. STA. 47+43	= 260 FOOT
LT. STA. 48+25 TO LT. STA. 49+97	= 256 FOOT
LT. STA. 50+19 TO LT. STA. 50+55	= 55 FOOT
RT. STA. 48+25 TO RT. STA. 50+55	= 236 FOOT
<b>TOTAL</b>	<b>= 1,060 FOOT</b>

**BILL OF MATERIAL**

ITEM	UNIT	QUANTITY
TEMPORARY EROSION CONTROL SEEDING	POUND	45
PERIMETER EROSION BARRIER	FOOT	1,060

THE QUANTITIES ABOVE ARE ESTIMATES ONLY. ACTUAL QUANTITIES FOR EROSION CONTROL WILL BE DETERMINED BY THE ENGINEER IN THE FIELD AND THERE WILL BE NO ADJUSTMENT IN ANY PRICE DUE TO A CHANGE IN PLAN QUANTITY.