
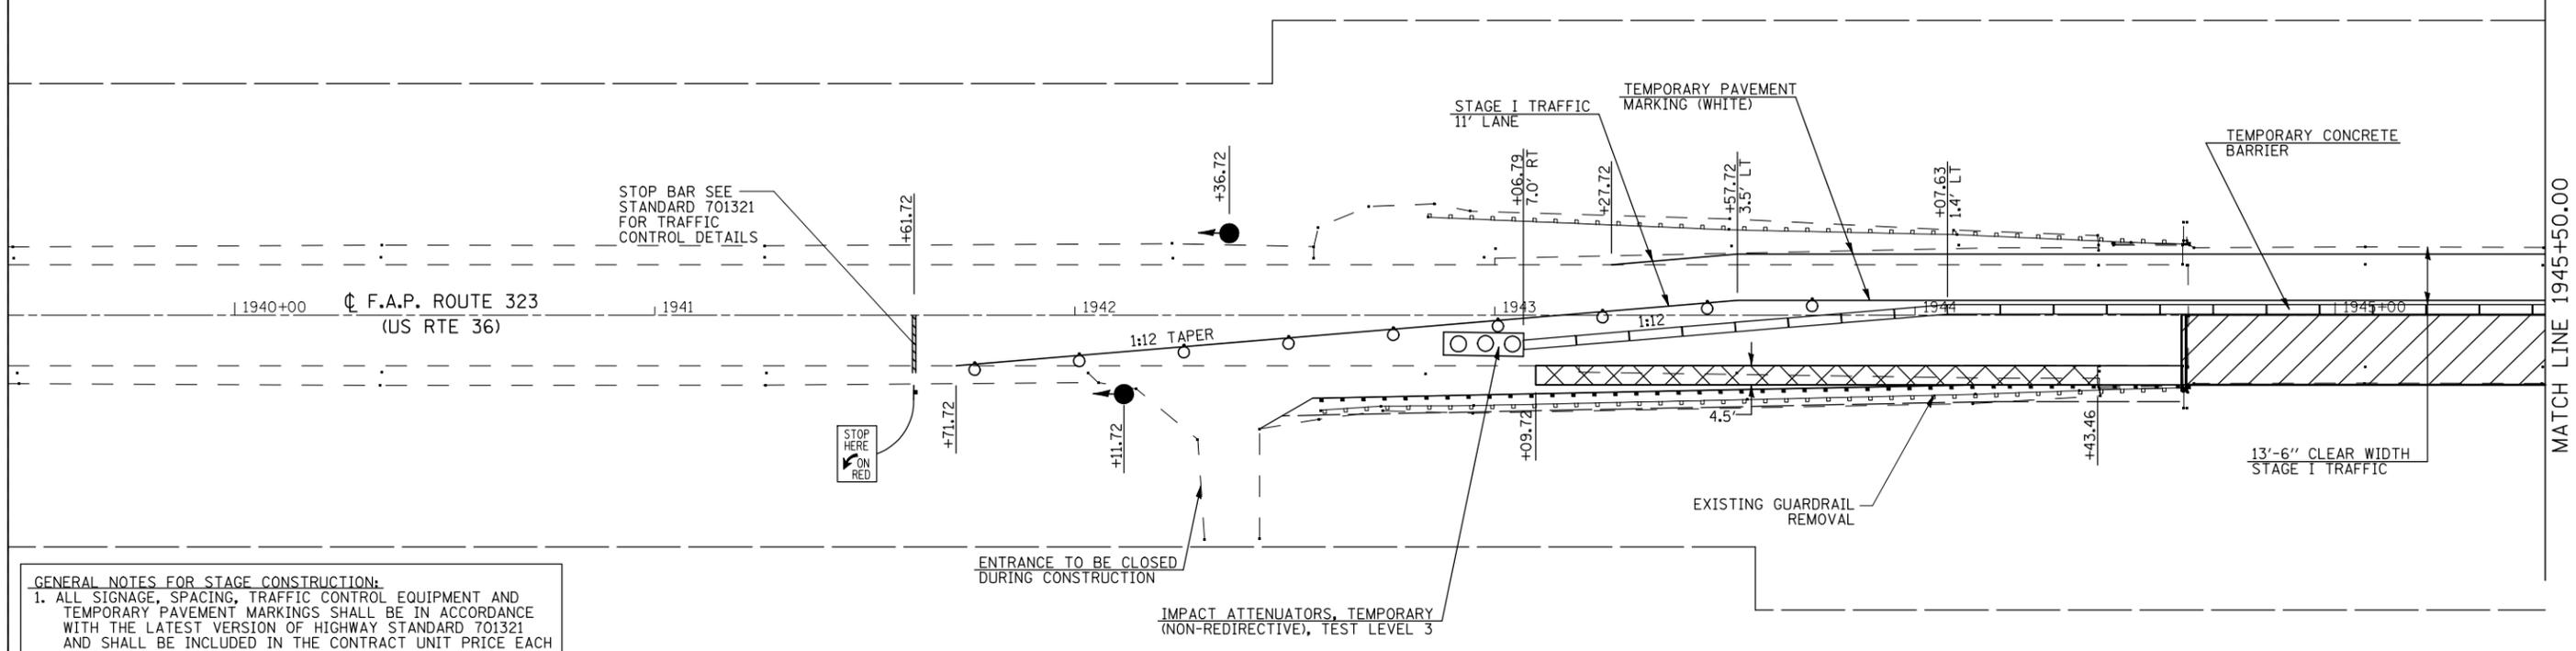


STAGE I TRAFFIC CONTROL

STAGE I NOTES



1. ERECT SIGNS, TRAFFIC SIGNALS, TEMPORARY BARRIERS, ETC. ACCORDING TO TRAFFIC CONTROL STANDARD 701321.
2. PLACE TEMPORARY PAVEMENT MARKING LINE TO ALLOW FOR A 11'-0" TRAFFIC LANE. REMOVE ANY CONFLICTING STRIPING.
3. REMOVE THE STAGE I PORTION OF THE EXISTING STRUCTURE, PAVEMENT AND GUARDRAIL.
4. CONSTRUCT THE STAGE I PORTION OF THE NEW BRIDGE AND TEMPORARY RAMPS.
5. CONSTRUCT BASE COURSE (OPTION) FOR STAGE II TRAFFIC.
6. CONSTRUCT EARTH EMBANKMENT, PLACE AGGREGATE SHOULDER, AND INSTALL GUARDRAIL.

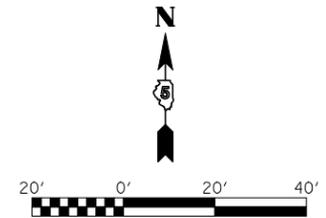

GENERAL NOTES FOR STAGE CONSTRUCTION:

1. ALL SIGNAGE, SPACING, TRAFFIC CONTROL EQUIPMENT AND TEMPORARY PAVEMENT MARKINGS SHALL BE IN ACCORDANCE WITH THE LATEST VERSION OF HIGHWAY STANDARD 701321 AND SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE EACH FOR TRAFFIC CONTROL AND PROTECTION STANDARD 701321.
2. ALL TEMPORARY BRIDGE TRAFFIC SIGNALS FOR CONSTRUCTION WILL BE MEASURED AS 1 (ONE) UNIT.
3. BARRIER OFFSETS ARE FROM THE CENTER OF THE BARRIER.
4. SEE BRIDGE PLANS FOR ADDITIONAL DETAILS.
5. STOP BARS TO BE LOCATED PER STD. 701321.

STAGE I TRAFFIC CONTROL

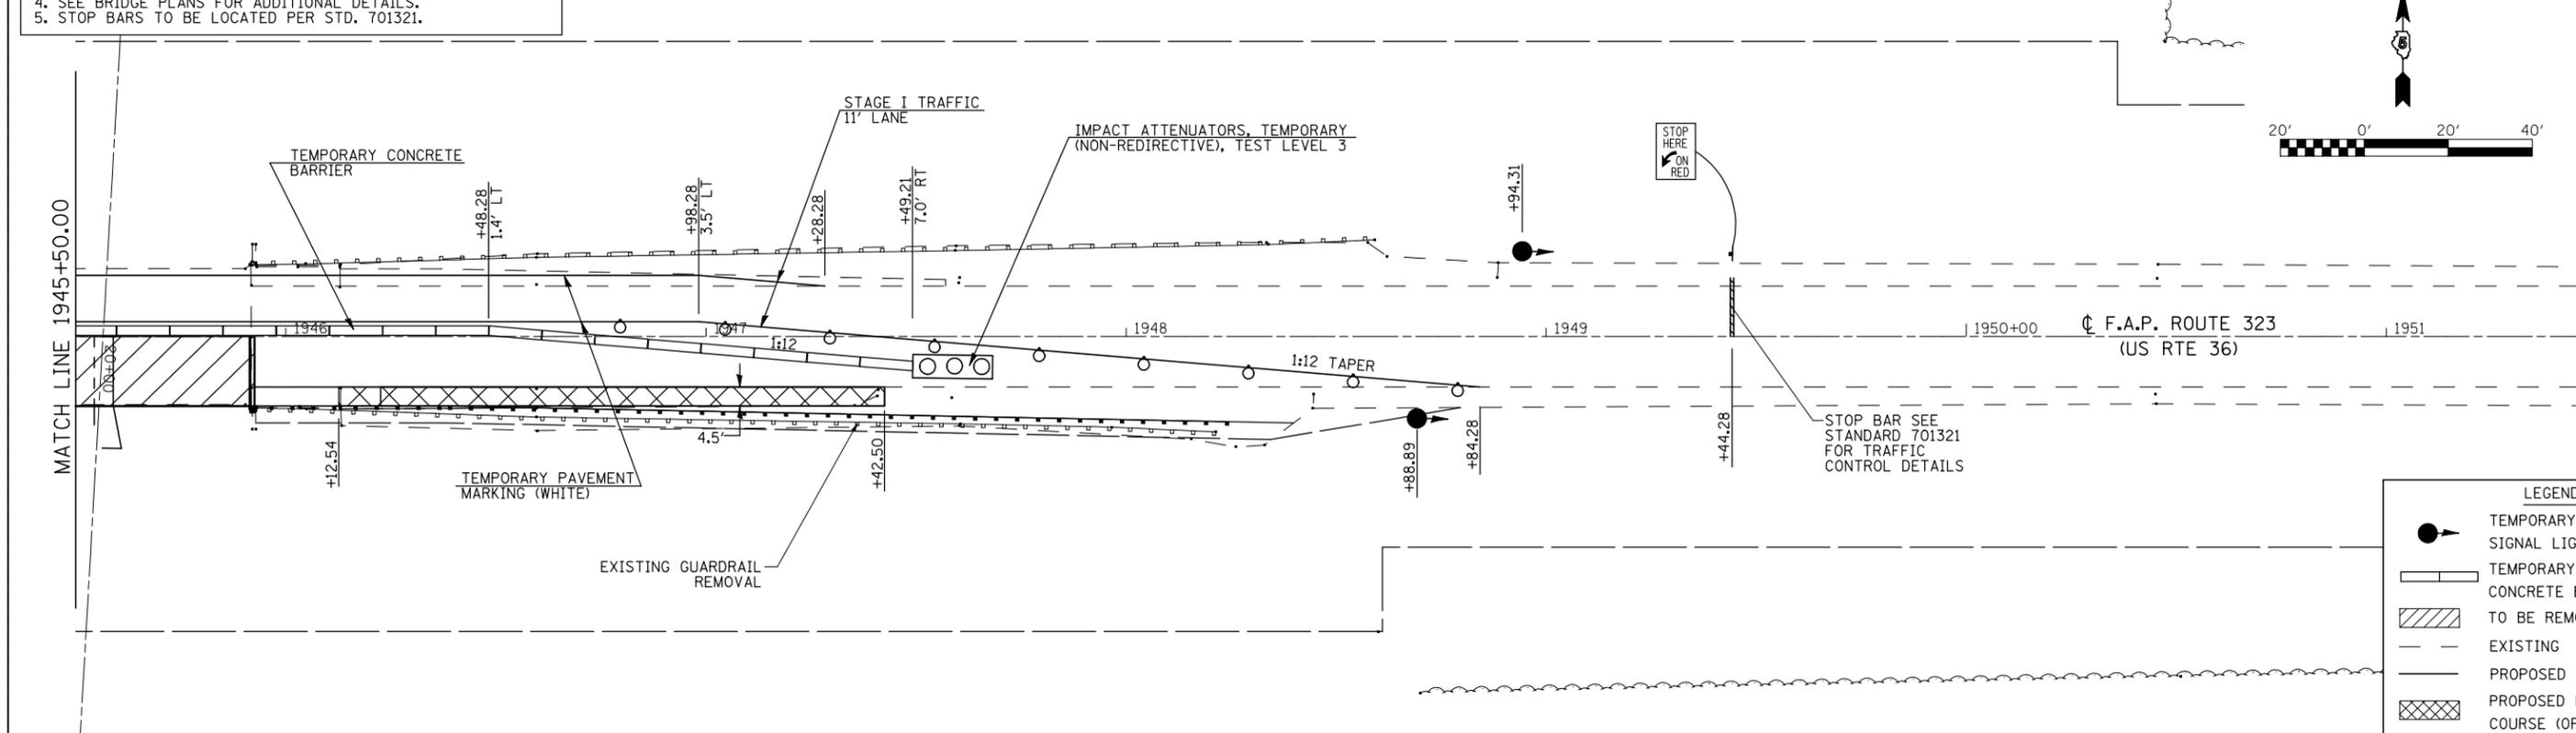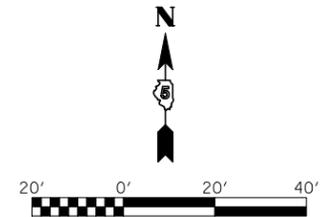

LEGEND	
	TEMPORARY SIGNAL LIGHT
	TEMPORARY CONCRETE BARRIER
	TO BE REMOVED
	EXISTING
	PROPOSED
	PROPOSED BASE COURSE (OPTION)

FILE NAME = #FILE#	USER NAME = #USER#	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STAGE I CONSTRUCTION			F.A.P. RTE. 323	SECTION 150BR-1	COUNTY EDGAR	TOTAL SHEETS 48	SHEET NO. 9
	PLOT SCALE = #SCALE#	DRAWN -	REVISED -		SCALE: NONE	SHEET NO. 1 OF 2 SHEETS	STA.	TO STA.	CONTRACT NO. 70609			
	PLOT DATE = #DATE#	CHECKED -	REVISED -									
		DATE -	REVISED -									