
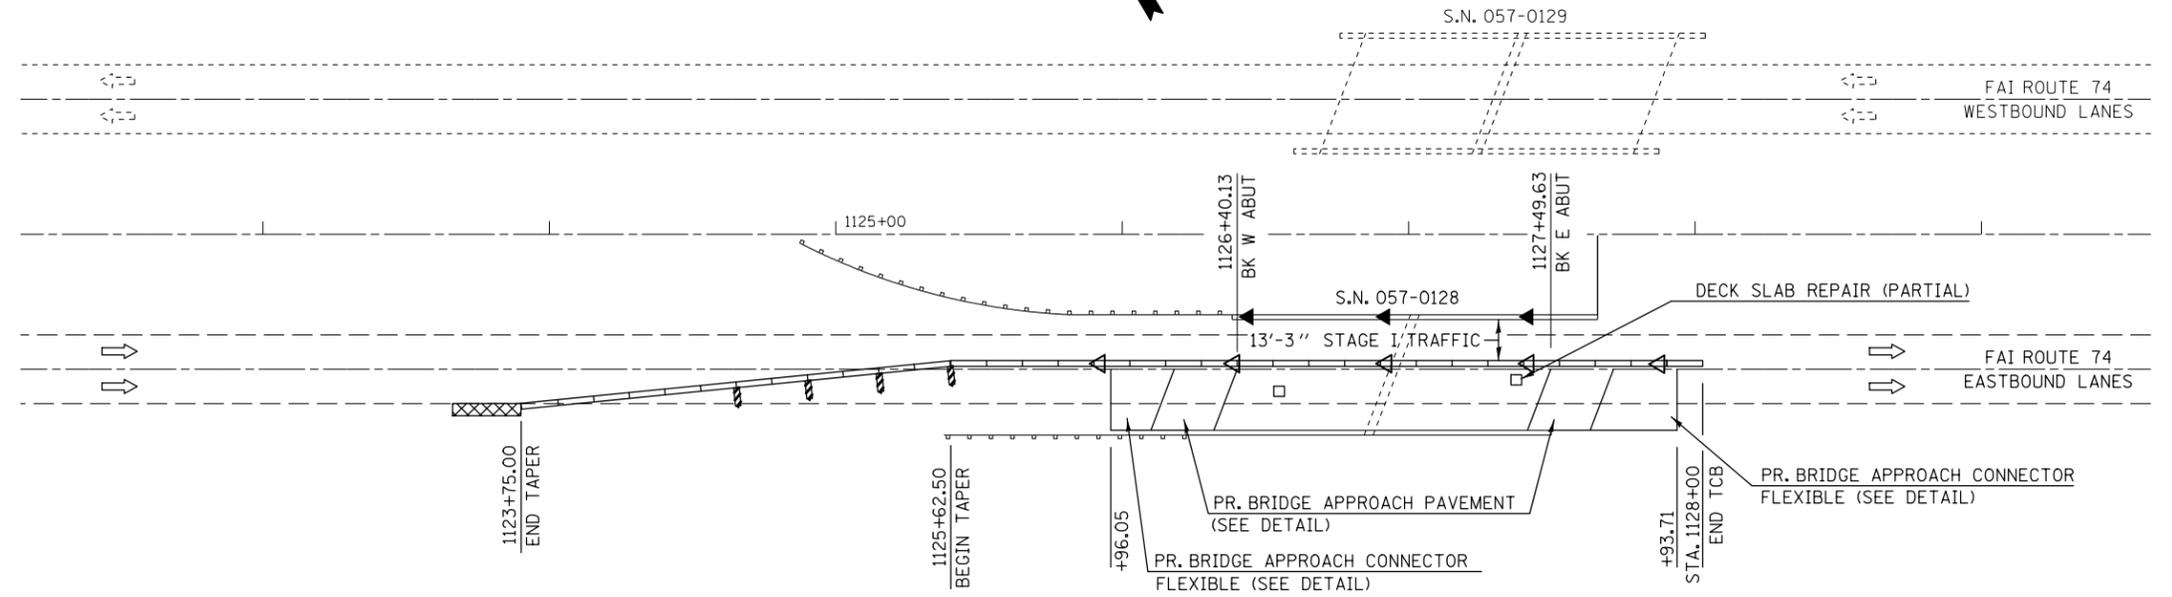


STAGE I CONSTRUCTION S.N. 057-0128 (EASTBOUND)

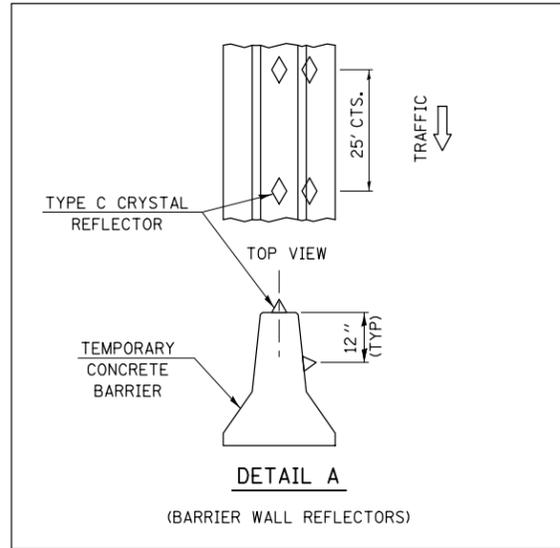

70400100 TEMPORARY CONCRETE BARRIER

STA 1123+75 TO STA 1128+00 = 425.0'

SYMBOLS


- ◀ AMBER MONODIRECTIONAL REFLECTOR @ 25' CTS
- △ CRYSTAL MONODIRECTIONAL REFLECTOR @ 25' CTS
- ▬ TEMPORARY CONCRETE BARRIER
- ▣ IMPACT ATTENUATOR
- ▨ VERTICAL PANEL (BACK-BACK) WITH LIGHT 4-PANELS EACH SET-UP @ 25' CTS

STAGE II CONSTRUCTION S.N. 057-0128 (EASTBOUND)



PLAN NOTES:

1. ALL STAGING DETAILS SET UP IN ACCORDANCE WITH TRAFFIC CONTROL AND PROTECTION 701402.
2. PRIOR TO BARRIER PLACEMENT TRAFFIC CONTROL SHALL BE SET UP IN ACCORDANCE WITH STANDARD 701406.
3. TRAFFIC CONTROL DETAILS NOT SHOWN ARE TO CONFORM WITH STANDARD 701400 AND 701402.
4. RAISED REFLECTIVE PAVEMENT MARKERS AFFECTED BY THE PROPOSED CONSTRUCTION SHALL BE REPLACED. THIS COST SHALL BE INCLUDED WITH TRAFFIC CONTROL & PROTECTION, STANDARD 701402.
5. REFLECTORS AND VERTICAL PANELS FOR BARRIER WALL, BRIDGE RAIL AND GUARDRAIL SHALL BE INCLUDED IN WITH TC&P, STANDARD 701402.
6. TEMPORARY PAVEMENT MARKING TAPE SHALL BE PLACED THROUGHOUT THE TAPER AND ALONGSIDE THE WORK AREA. THE RIGHT EDGE LINE SHALL BE WHITE AND THE LEFT EDGE LINE BE YELLOW. COST FOR THE PLACEMENT AND REMOVAL SHALL BE INCLUDED WITH TC&P, STANDARD 701402

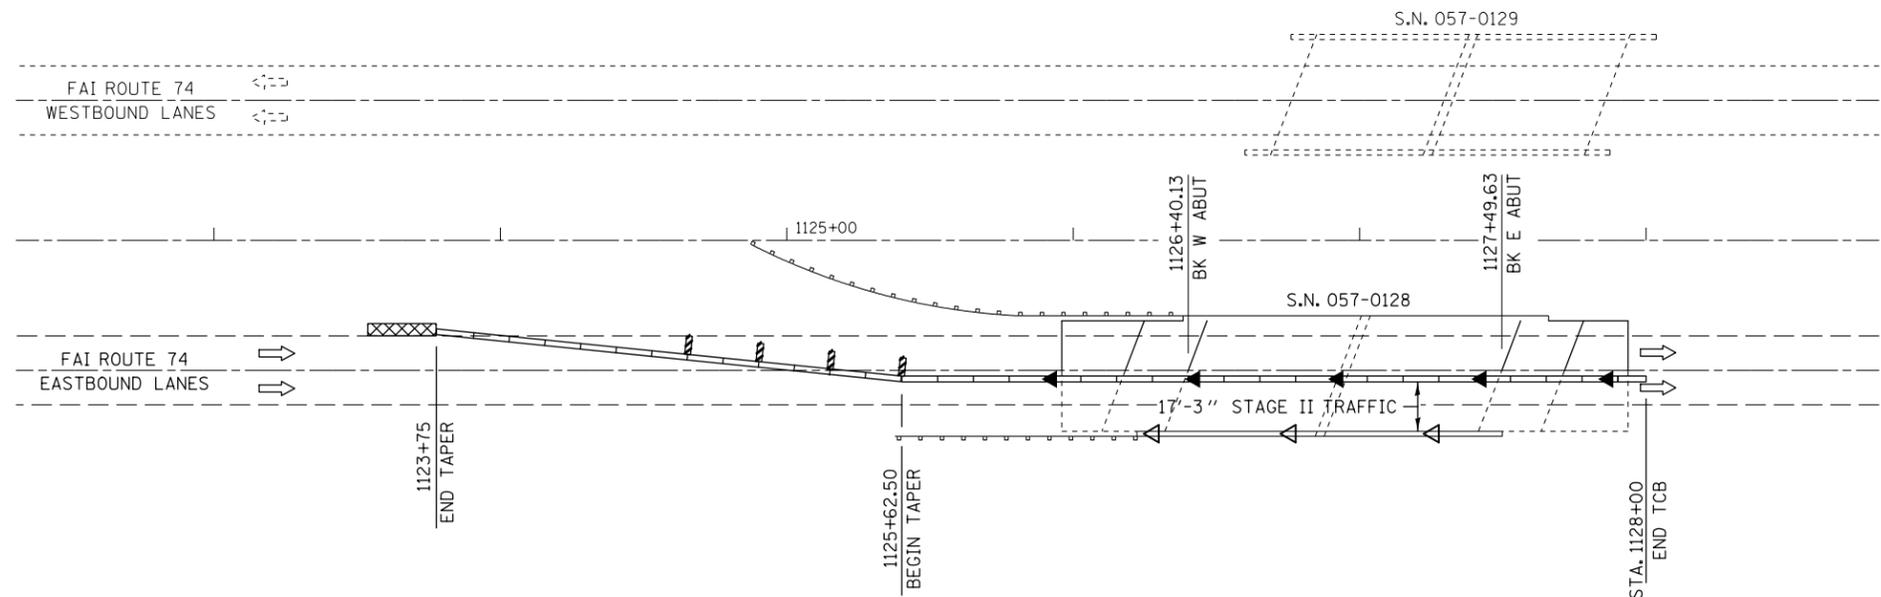

70400200 RELOCATE TEMPORARY CONCRETE BARRIER

STA 1123+75 TO STA 1128+00 = 425'

FILE NAME =	USER NAME = ppersonbr	DESIGNED - TJB	REVISED - 8/8/11	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STAGE CONSTRUCTION S.N. 057-0128			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
et:\pwork\pwork\personbr\d0184863\0570648-shr-Structure-plans.dgn		DRAWN - JJB	REVISED - 8/10/11		74	(57-23,57-24)RS-1	MCLEAN	175	78			
PLOT SCALE = 40.0000' / in.		CHECKED -	REVISED -		CONTRACT NO. 70648			ILLINOIS FED. AID PROJECT				
PLOT DATE = 8/25/2011		DATE -	REVISED -		SCALE: N/A	SHEET NO. 4 OF 14 SHEETS	STA. TO STA.					