F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
337	20R-5	LAKE	562	21
STA. 99+815.000		TO STA. 104+665.000		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

D-91-552-99 60881

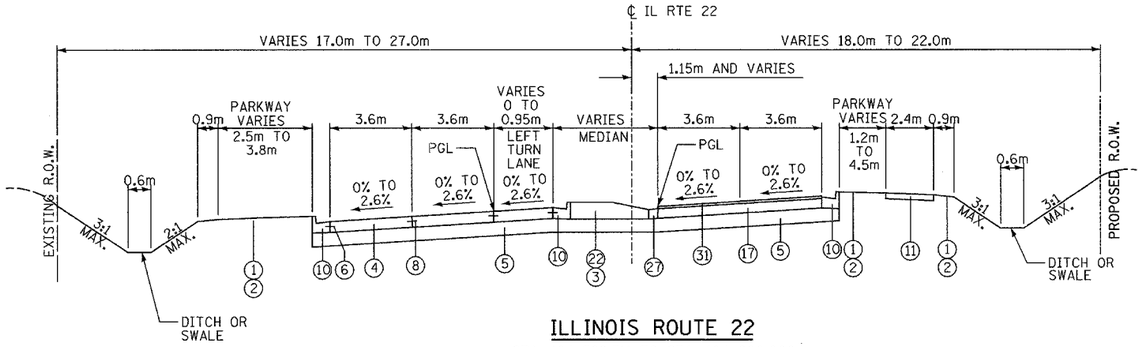

ILLINOIS ROUTE 22

STA. 104+522.511 TO STA. 104+600.000

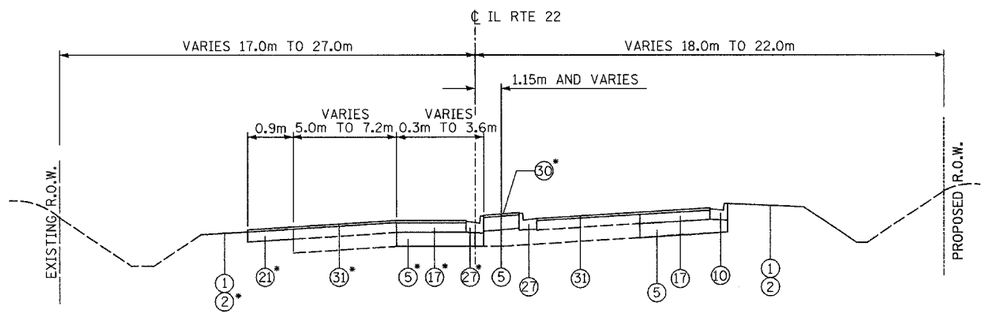

ILLINOIS ROUTE 22

STA. 104+600.000 TO STA. 104+695.000

* TO STA 104+665 ONLY

LEGEND

1. TOPSOIL FURNISH AND PLACE, 100mm
2. SODDING, SALT TOLERANT
3. SEEDING (TYPE AS SPECIFIED IN PLANS)
4. PORTLAND CEMENT CONCRETE PAVEMENT 250mm (JOINTED)
5. AGGREGATE SUBGRADE, 300mm
6. CONSTRUCTION JOINT WITH NO. 20 DEFORMED TIE BAR (EPOXY COATED), 600mm LONG @ 600mm CENTERS, DRILL & GROUT IN PLACE (INCLUDED IN COST OF CURB & GUTTER)
7. CONSTRUCTION JOINT WITH NO. 25 DEFORMED TIE BAR (EPOXY COATED), 600mm LONG @ 600mm CENTERS, DRILL & GROUT IN PLACE (INCLUDED IN COST OF PCC PAVEMENT)
8. SAWED LONGITUDINAL JOINT WITH NO. 20 DEFORMED TIE BAR (EPOXY COATED), 750mm LONG @ 750mm CENTERS (INCLUDED IN COST OF PCC PAVEMENT)
9. PORTLAND CEMENT CONCRETE SIDEWALK 125mm
10. COMBINATION CONCRETE CURB AND GUTTER, TYPE B-15.60
11. BITUMINOUS SIDEPATH (SEE DETAIL)
12. CONCRETE MEDIAN, TYPE SB-15.60
13. CONCRETE MEDIAN, TYPE SB (SPECIAL)
14. CORRUGATED MEDIAN
15. BITUMINOUS SHOULDERS SUPERPAVE, 250mm
16. COMBINATION CONCRETE CURB AND GUTTER, TYPE B15.30
17. BITUMINOUS BASE COURSE, SUPERPAVE 250mm
18. BITUMINOUS SURFACE REMOVAL
19. BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19.0, N70, 38mm
20. BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX D, N70, 38mm
21. AGGREGATE SHOULDERS, TYPE B 250mm
22. TOPSOIL, FURNISH AND PLACE, 600mm
23. BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX C, N50, 38mm
24. BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19.0, N70, 100mm
25. PORTLAND CEMENT CONCRETE SHOULDERS, 250mm
26. PAVEMENT FABRIC
27. COMBINATION CONCRETE CURB AND GUTTER, TYPE M5.30
28. INCIDENTAL BITUMINOUS SURFACING - 50mm
29. BITUMINOUS CONCRETE BASE COURSE WIDENING, SUPERPAVE, 250mm
30. BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX C, N50, 50mm
31. POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX F, N90, 50mm

FINAL SURVEY	BY	DATE
SURVEYED		
PLOTTED		
TEMPLATE		
AREAS		
AREAS CHECKED		
NOTE BOOK NO.		

ORIGINAL SURVEY	BY	DATE
SURVEYED		
PLOTTED		
TEMPLATE		
AREAS		
AREAS CHECKED		
NOTE BOOK NO.		

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
IL RTE 22 (FAP 337)
IL RTE 83 TO US 45 / IL 21 (MILWAUKEE AVE)

PROPOSED TYPICAL SECTIONS
ILLINOIS RTE 22

SCALE: NONE DRAWN BY: DLT
DATE: 03-22-2004 CHECKED BY: JNR