| F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 337 | 20R-5 | LAKE | 562 | 302 |
| STA. 102+395 | | TO STA. 103+060 | | |
| FED. ROAD DIST. NO. | | ILLINOIS | FED. AID PROJECT | |
| D-91-552-99 | | | 60881 | |

| FINAL SURVEY | BY | DATE |
|---|---|---|
| SURVEYED | | |
| PLOTTED | | |
| NOTE BOOK | TEMPLATE | |
| NO. | AREAS | |
| | AREAS CHECKED | |

MATCHLINE STA. 102+395

RELOCATE EXISTING "EASTON AVE" AND POST

PROP. R1-1 (750mm X 750mm)

PROP. W11-8 (750mm X 750mm) W11-8P (600mm X 450mm)

EASTON AVE.

PROP. R3-2 (750mm X 750mm) ⑧ 6AM – 9AM MON – FRI 969mm X 450mm

⑩ PROP. BUFFALO GROVE 43000 1200mm X 450mm

R2-1 (45MPH) (600mm X 750mm)

RELOCATE EXISTING "FIORE NURSERY" AND POSTS

PROP. R3-5L (750mm X 900mm)

ILLINOIS ROUTE 22

102+400 102+450 102+500 102+550 102+600 102+650 102+700

PROP. R4-7 (600mm X 750mm)

PROP. R4-7 (600mm X 750mm)

PROP. R4-7 (600mm X 750mm)

PROP. R3-2 (750mm X 750mm) ⑦ 6AM – 9AM MON – FRI 969mm X 450mm

RELOCATE EXISTING "EASTON AVE" AND POST

PROP. R3-5L (750mm X 900mm) R4-7 (600mm X 750mm)

⑨ PROP. PRAIRIE VIEW UNINCORPORATED 1350mm X 450mm

R2-1 (35MPH) (600mm X 750mm)

MATCHLINE STA. 102+720

N

1

PROP. X10-I100 (450mm X 600mm)

RELOCATE EXISTING SIGN BY OTHERS

RELOCATE EXISTING FOLDING STOP SIGN

RELOCATE EXISTING "VERNON TOWNSHIP CENTER" ON NEW TYPE B POST

PROP. R1-1 (750mm X 750mm)

RELOCATE EXISTING "METRA & ARROW" ON NEW TYPE B POST

PROP. (1050mm X 300mm) ⑫ Prairie Rd

PROP. R8-8 (600mm X 750mm)

PRAIRIE ROAD (NORTH)

RELOCATE EXISTING "ODD/EVEN SPRINKLING RESTRICTIONS WATERING PROHIBITED NOON TO 6 PM MAY 15-SEPT 15" AND POST

PROP. W10-1 (900mm X 900mm)

PROP. X10-I100 (450mm X 600mm)

PROP. ILL RTE 22 HALF DAY ROAD 1830mm X 750mm

RELOCATE EXISTING FOLDING STOP SIGN

PROP. X10-I100 (450mm X 600mm)

PROP. 1520mm X 450mm 1S NIVM MAIN ST

PROP. R4-7 (600mm X 750mm)

PROP. R3-5L (750mm X 900mm) 1520mm X 450mm

MAIN STREET

0+000

PROP. R4-7 (600mm X 750mm)

PROP. R3-5L (750mm X 900mm)

102+750 102+800 102+850 102+900 102+950 103+000 103+05

ILLINOIS ROUTE 22

RELOCATE SIGN PANEL (FOLDING STOP SIGN)

PROP. X10-I100 (450mm X 600mm)

PROP. W10-1 (900mm X 900mm)

PROP. X10-I100 (450mm X 600mm)

PROP. 1830mm X 750mm ILL RTE 22 HALF DAY ROAD

RELOCATE EXISTING "METRA & ARROW" ON NEW TYPE B POST

RELOCATE EXISTING "ADOPT A HIGHWAY" AND POST

PRAIRIE ROAD

L9+950

PROP. R8-8 (600mm X 750mm)

PROP. R3-2 (750mm X 750mm)

PROP. R3-2 (750mm X 750mm)

PROP. PRAIRIE RD 1520mm X 450mm PRAIRIE RD 1520mm X 450mm

PROP. X10-I100 (450mm X 600mm)

RELOCATE EXISTING FOLDING STOP SIGN

EXISTING SIGN TO REMAIN

SEE DRAWING FOR "SIGN PANEL DETAILS"

RELOCATE EXISTING "ODD/EVEN SPRINKLING RESTRICTIONS WATERING PROHIBITED NOON TO 6PM MAY 15 - SEPT 15" AND POST

**NOTE:**
**SEE SIGNING SCHEDULE FOR DETAIL INFORMATION ON SIGNS**

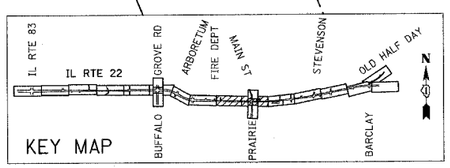

KEY MAP

| REVISIONS | |
|---|---|
| NAME | DATE |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

ILLINOIS DEPARTMENT OF TRANSPORTATION
IL RTE 22 (FAP 337)
IL RTE 83 TO US 45 / IL 21 (MILWAUKEE AVE)
SIGNING PLAN
STA. 102+395 TO STA. 103+060
SHEET 5 OF 9

SCALE: 1:500 DRAWN BY: AMB

DATE: 03-22-2004 CHECKED BY: JNR

n:\00332\Road\22sign05.dgn 04/15/2004 03:52:05 PM