FAS ROUTE NO	SEC	COUNTY	TOTAL SHEETS	SHEET NO
—	*	LEE	20	13

ILLINOIS PROJECT TE-D2(115)

* 01-P4000-00-BT

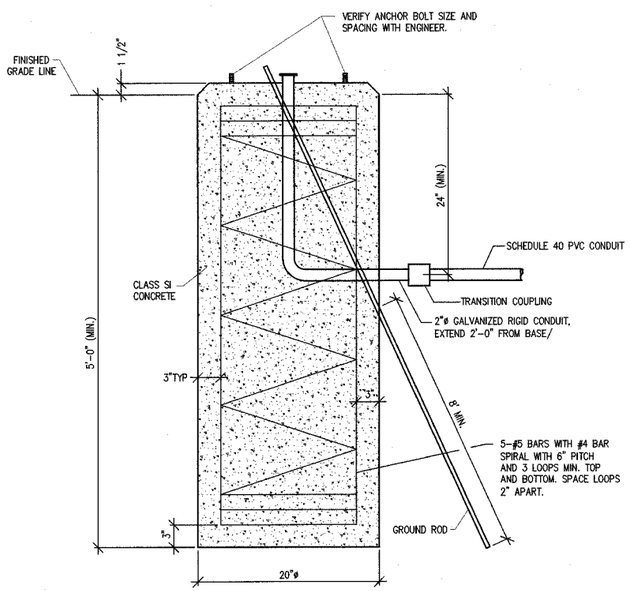

LIGHT POLE FOUNDATION DETAIL

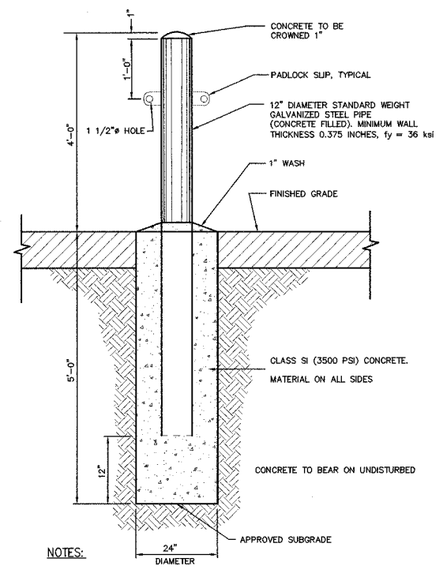

NOTES:

1. WHEN PROTECTION POSTS ARE TO BE USED FOR PROTECTION OF HANDICAP PARKING SIGNS OR OTHER TRAFFIC SIGNS, SIGN SUPPORTING POSTS SHALL BE IMBEDDED A MINIMUM OF THREE (3) FEET INTO THE CONCRETE.

2. POST SHALL BE PAINTEDAS FOLLOWS:
   A. SOLVENT CLEAN TO REMOVE OIL, GREASE AND OTHER CONTAMINANTS.
   B. APPLY METAL PRIMER FOR GALVANIZED SURFACES.
   C. APPLY TWO (2) FINISH COATS OF APPROVED EXTERIOR PAINT FOR METAL SURFACES.
   D. PAINTING SHALL BE CONSDERED INCIDENTAL TO THE INSTALLATION OF THE POSTS.

GUARD POSTS, SPECIAL

TREE REPLACEMENT SCHEDULE

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
STA.		TO STA.		
FED.ROAD DIST.NO.	ILLINOIS	PLAN AND PROJECT		

CODE NO.	SCIENTIFIC NAME	COMMON NAME	SIZE	UNIT	LOCATION	QUANTITY
A2001714	ACER SACCHARUM 06	SUGAR MAPLE	1 3/4" - 2" BB	EACH	*	8
A2007114	QUERCUS RUBRA	RED OAK	1 3/4" - 2" BB	EACH	*	8
B2005064	MALUS SNOWDRIFT 10	SNOWDRIFT CRABAPPLE	5-6' BB	EACH	*	8

* LOCATIONS SHALL BE DETERMINED BY PARK DISTRICT

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

5-15-91 90.4

© WENDLER ENGINEERING SERVICES, INC. 2004

WENDLER ENGINEERING SERVICES, INC.
Structural & Civil Engineers–Land Surveying–Environmental Services
Illinois Professional Design Firm No. 184-000848

1968 - 2004 AFTER 36 YEARS. WE'RE STILL "Turning Ideas... ...into Reality!!"

698 TIMBER CREEK ROAD – P.O. BOX 486 – DIXON, IL 61021 – 815-288-2261
28 E. MARION – SUITE 3 – PRINCETON, IL 61356 – 815-879-4731
1770 WEST STATE ST. – SYCAMORE, IL 60178 – 815-895-5008
804 FREEPORT RD. – STERLING, IL 61081 – (815) 626-4428
E-MAIL: info@wendler.nu

SCALE: 1"=NTS

REVISION	DATE

SURVEYED BY	JOB NO. 99022	DRAWN BY BDS	DESIGNED BY
BOOK NO.	DRAWING NAME DETAILS	DRAWING DATE 2/3/2004	

TITLE

TITLE GENERAL DETAILS

CLIENT DIXON PARK DISTRICT