
PROP. PAY LIMIT OF HMA SURF. REMOVAL FULL THICKNESS OF MILLING TEMP. RAMP (NOTE "C") (NOTE "E") PROP. HMA SURFACE REMOVAL EXIST. PAVEMENT EXIST. HMA MILLED TEMPORARY RAMP (FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW) OPTION 1 PROP. PAY LIMIT OF HMA SURF. REMOVAL FULL THICKNESS OF MILLING SAW CUT (INCLUDED IN THE COST OF HMA SURFACE (NOTE "C") PROP. HMA SURFACE REMOVAL REMOVAL - BUTT JOINT) 13/4 (45) FOR E AND F MIX 4'-6" (1.35 m) PAY LIMIT FOR BUTT JOINT 1/2 (40) FOR C AND D MIX EXIST. HMA EXIST. PAVEMENT TEMP. HMA RAME HMA CONSTRUCTED TEMPORARY RAMP (FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW) OPTION 2 TYPICAL TEMPORARY RAMP HMA TAPER LENGTH SAW CUT (INCLUDED IN THE COST *** OF HMA SURFACE PROP. HMA SURF. CRSE. REMOVAL - BUTT JOINT)

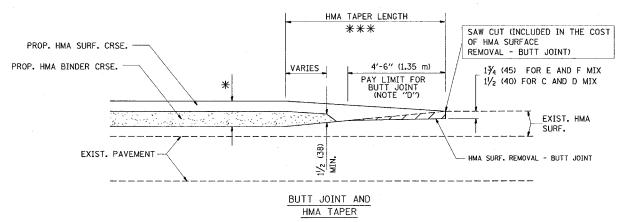

TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

COUNTY TOTAL SHEET NO. F.A.P. SECTION 345 3058 (A.B.L) 45-1 COOK 51 43 STA. TO STA. FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT PROP. HMA OR PCC SURFACE REMOVAL - BUTT JOINT SAW CUT (INCLUDED IN THE COST EXIST. HMA OR PCC SURFACE 30'-0" (9.0 m) (NOTE "A") OF HMA OR P.C.C. SURFACE REMOVAL 15'-0" (4.5 m) (NOTE "B") (NOTE "D") 13/4 (45) FOR E AND F MIX 11/2 (40) FOR C AND D MIX * * EXIST. PAVEMENT BUTT JOINT DETAIL TAPER LENGTH * * VARIES PROP. HMA SURF. CRSE. 13/4 (45) FOR E AND F MIX PROP. HMA BINDER CRSE. 1/2 (40) FOR C AND D MIX

TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

HMA TAPER DETAIL

PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

* * EXIST. PAVEMENT

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-O" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL - BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- igspace * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

** ** * 20′-0″ (6.1 m) PER 1 (25) RESURFACING (NOTE "A") 10'-0" (3.0 m) PER 1 (25) RESURFACING (NOTE "B") ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

KE A 12 TON 2		
NAME	DATE	
M. DE YONG	6-13-90	
M. DE YONG	7-3-90	
M. DE YONG	3-27-92	
R. SHAH	09/09/94	
R. SHAH	10/25/94	
A. ABBAS	03/21/97	
M. GOMEZ	04/06/01	
R. BORO	01/01/07	SCA
		SUP

ILLINOIS DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND HMA TAPER DETAILS

DRAWN BY CHECKED BY

BD400-05 (VI=BD32)