

SIDEWALK

USE STD 701501 WHEN WORKING.

STAGE 5A /5B TRAFFIC STATUS:

- 1. ALL TRAVEL LANES TO REMAIN OPEN ON STATE STREET AND MAIN STREET.
- 2. SIDEWALK CLOSURE ON ONLY ONE SIDE OF STATE STREET AT A TIME.

STAGE 5A / 5B CONSTRUCTION:

- SAW CUT AND REMOVE SECTIONS OF THE EXISTING STREET AND SIDEWALK PAVEMENTS IN THE STAGE AREAS AS SHOWN AND SPECIFIED IN THE SPECIAL PROVISIONS UNDER TRAFFIC CONTROL AND PROTECTION.
- CONSTRUCT NEW SECTIONS OF THE EXISTING STREET AND SIDEWALK PAVEMENTS IN THE STAGE AREAS AS SHOWN AND SPECIFIED IN THE SPECIAL PROVISIONS UNDER TRAFFIC CONTROL AND PROTECTION.

STAGE 5A / 5B TRAFFIC CONTROL NOTES:

- 1. MAINTAIN PEDESTRIAN ACCESS TO PROPERTY / BUSINESSES AS LONG AS POSSIBLE. SAFETY FENCE SHALL BE ERECTED BETWEEN ALL OPEN PEDESTRIAN AREAS AND ADJACENT WORK AREAS.
- CONFORM TO STANDARD 701801 FOR SIDEWALK CLOSURES, SIDEWALKS ON BOTH SIDES OF THE STREET SHALL NOT BE CLOSED AT THE SAME TIME.
- COORDINATE WITH LOCAL RESIDENTS AND BUSINESSES A MINIMUM OF 48 HOURS PRIOR TO RESTRICTING ACCESS TO DRIVEWAYS AND BUSINESS ENTRANCES. PEDESTRIAN ACCESS SHALL BE MAINTAINED AT ALL TIMES.
- 4. IF A PROPERTY AND / OR BUSINESS HAS TWO ACCESS DRIVEWAYS AS DETERMINED BY THE ENGINEER, THE REMOVAL AND REPLACEMENT OF THE TWO DRIVEWAYS SHALL NOT OCCUR SIMULTANEOUSLY. ONE PAVED DRIVEWAY SHALL BE OPEN TO THE PROPERTY AND / OR BUSINESS AT ALL TIMES.

LEGEND:

TT

WORK AREAS

TYPE III BARRICADE WITH FLASHERS

H-0-1

DETECTABLE PEDESTRIAN CHANNELLIZING (DPC) BARRICADE

BARRICADE OR DRUM WITH LIGHT SIGN WITH FLASHING LIGHT

SIGN ON PORTABLE OR

0


VERTICAL BARRICADE WITH LIGHT

INDICATES DIRECTION OF TRAFFIC FLOW ONLY (NO PAVEMENT MARKING)

STATE ST.



IL DESIGN FIRM NO. 184-000843

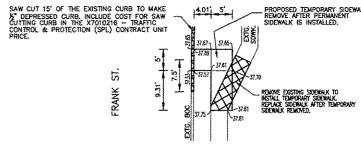

37.75 = ELEVATION 637.75'

19

STREET RE-CONSTRUCTION

STATE:

FFIC CONTROL PLAN STAGES 5A & 5B

DPC BARRICADE

RI1-1102 -2430

O COPYRIGHT 2013 ALL RIGHTS RESERVED Field Book No:### Drawn By: JNM Checked By: JLM Date: 11/19/2012

A10M008

File Name: 10M000 TRAFFIC CONTRO

Sheet 19 of 99