



RAILROAD CROSSING WITH INTERCONNECT ONLY RAILROAD CROSSING WITH INTERCONNECT AND PRE-SIGNALS

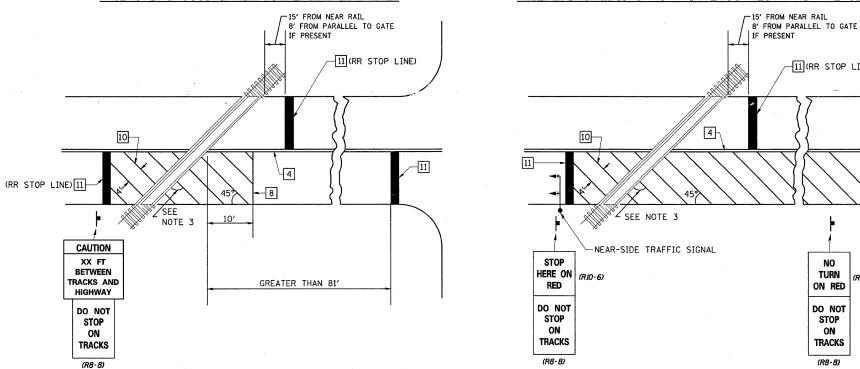

SUPPLEMENTAL PAVEMENT MARKING TREATMENT FOR RAILROAD-HIGHWAY GRADE CROSSING

PAVEMENT MARKING LEGEND

- 1 4" (100) SKIP-DASH (YELLOW)
- 2 4" (100) SOLID (YELLOW) 3 12" (300) DIAGONAL (YELLOW)
- TRAFFIC
- 4" (100) DOUBLE YELLOW (NARROW)
- 4" (100) 8" (200) CTS.
- 5 RESERVED
- 6 RESERVED
- 7 6" (150) SKIP-DASH (WHITE)
- 8 4" (100) SOLID (WHITE)
- 9 12" (300) DIAGONAL (WHITE)
- 10 6" (150) SOLID (WHITE)
- 11 24" (600) STOP BAR (WHITE)
- 12 8" (200) SOLID (WHITE)
- 13 6" (100) LANE LINE EXTENSIONS (WHITE)
- 14 4" (100) PARKING WHITE



GENERAL NOTES

- SUPPLEMENTAL PAVEMENT MARKINGS TO BE INSTALLED ONLY ON APPROACHES TO INTERSECTIONS CONTROLLED BY TRAFFIC SIGNALS WHICH ARE INTERCONNECTED WITH THE RAILROAD WARNING SIGNALS.
- 2. EXTEND PAVEMENT MARKINGS TO THE INTERSECTION ONLY WHERE NEAR-SIDE TRAFFIC SIGNALS ARE USED.
- 3. WHERE THE ANGLE BETWEEN THE DIAGONAL PAVEMENT MARKINGS AND THE TRACK WOULD BE LESS THAN 20°, THE PAVEMENT MARKINGS SHOULD BE PLACED IN THE OPPOSITE DIRECTION FROM THAT SHOWN.

NOT TO SCALE

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

บเรา	IKICI	/ Ut	IAIL	NU.	78000	UUT

TOTAL SHEE USER NAME = teasleyo FILE NAME = DESIGNED REVISED COUNTY PAVEMENT MARKING AND RAISED REFLECTIVE PACEMENT MARKERS DRAWN REVISED STATE OF ILLINOIS Coles /4 /4 CONTRACT NO. 74382 (7,6) & (5,4)RS-2 (RURAL & URBAN APPLICATIONS) PLOT SCALE = 50.0000 '/ IN CHECKED REVISED **DEPARTMENT OF TRANSPORTATION** SHEET NO. 4 OF 4 SHEETS STA. PLOT DATE = 3/19/2010 DATE REVISED SCALE: TO STA.

-11 (RR STOP LINE)

TURN

ON RED

DO NOT

STOP

ON

TRACKS

(R10-11)