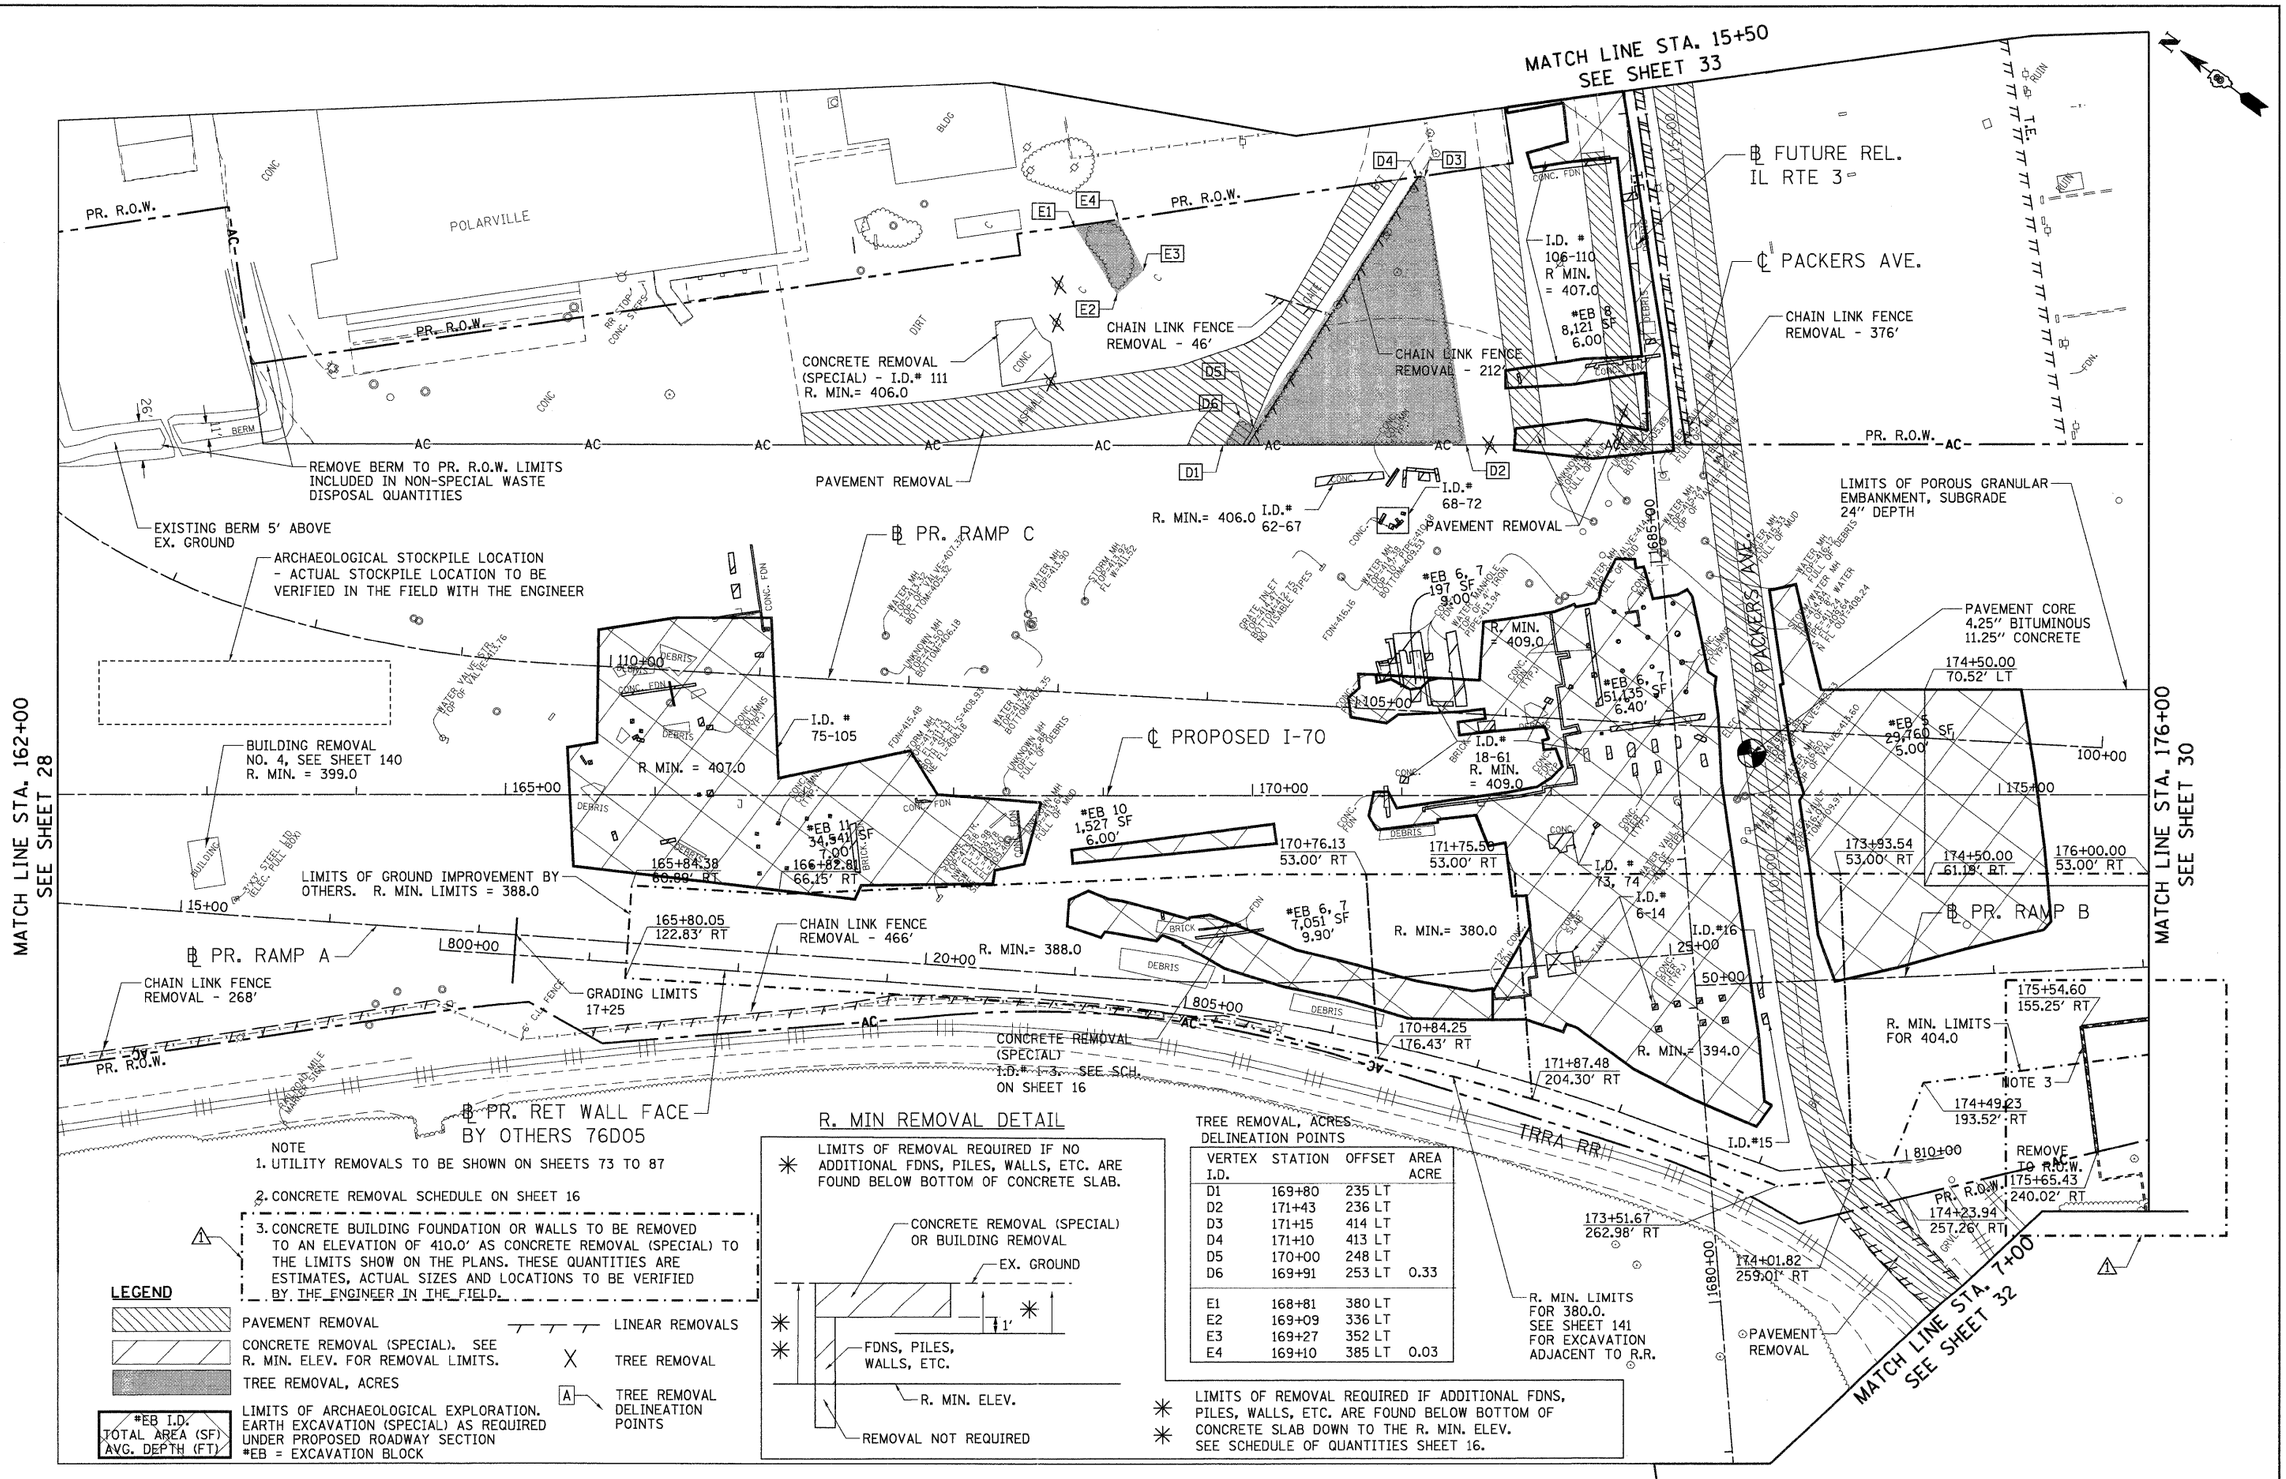

NOTE

1. UTILITY REMOVALS TO BE SHOWN ON SHEETS 73 TO 87
2. CONCRETE REMOVAL SCHEDULE ON SHEET 16
3. CONCRETE BUILDING FOUNDATION OR WALLS TO BE REMOVED TO AN ELEVATION OF 410.0' AS CONCRETE REMOVAL (SPECIAL) TO THE LIMITS SHOW ON THE PLANS. THESE QUANTITIES ARE ESTIMATES, ACTUAL SIZES AND LOCATIONS TO BE VERIFIED BY THE ENGINEER IN THE FIELD.

TREE REMOVAL, ACRES
DELINEATION POINTS

VERTEX I.D.	STATION	OFFSET	AREA ACRE
D1	169+80	235 LT	
D2	171+43	236 LT	
D3	171+15	414 LT	
D4	171+10	413 LT	
D5	170+00	248 LT	
D6	169+91	253 LT	0.33
E1	168+81	380 LT	
E2	169+09	336 LT	
E3	169+27	352 LT	
E4	169+10	385 LT	0.03