


TYPICAL SECTION

STA. 416+42.42 TO STA. 420+97.90 STA. 430+69.89 TO STA. 435+09.89

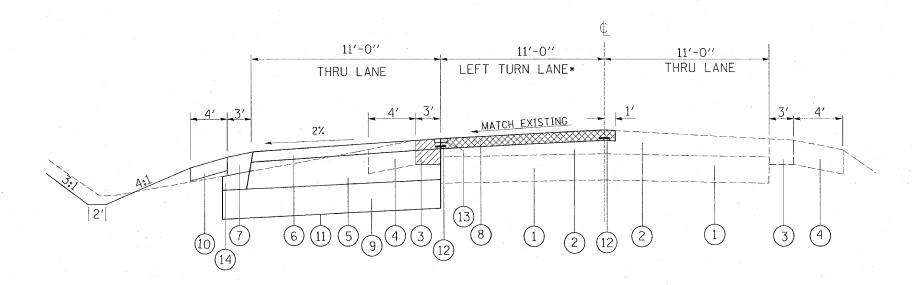

TYPICAL SECTION

STA. 420+97.90 TO STA. 430+69.89


*NOTE: TYPICALS INCLUDES TAPERS FROM STA. 416+42.42 TO STA. 420+97.90 & STA. 430+70.16 TO STA. 435+09.89



PROPOSED PAVED SHOULDER REMOVAL

LEGEND

- (1) EXISTING PCC PAVEMENT 10"-8"-10"
- (2) EXISTING HOT MIX ASPHALT RESURFACING 2 1/2"
- (3) EXISTING HOT MIX ASPHALT SHOULDER REMOVAL 6"
- (4) EXISTING AGGREGATE SHOULDERS 6"
- (5) PROPOSED HOT MIX ASPHALT BINDER 11 1/2"
- (6) PROPOSED POLYMERIZED HOT MIX ASPHALT SURFACE COURSE 1 1/2"
- (7) PROPOSED HOT MIX ASPHALT SHOULDERS 8"
- (8) PROPOSED POLYMERIZED HOT MIX ASPHALT RESURFACING 1 1/2"
- (9) PROPOSED AGGREGATE BASE COURSE TYPE A, 12"
- (10) PROPOSED AGGREGATE SHOULDERS TYPE B, 6"
- (11) PROPOSED GEOTECHNICAL FILTER FOR GROUND STABILIZATION
- (12) PROPOSED STRIP REFLECTIVE CRACK CONTROL
- (13) PROPOSED RUMBLE STRIP 16"
- (14) PROPOSED SUB-BASE GRANULAR MATERIAL, TYPE C

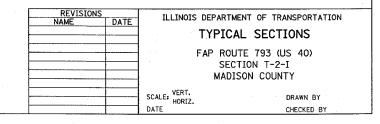

DAIE = SURIES
VAME = SFILELS
SCALE = SSCALES