

## TYPICAL APPLICATION

## GENERAL NOTES


- 1. The marker may be either precast of Class PC Concrete, or cast in place of Class SI Concrete.
- 2. Tie marker shall be installed after the final seeding has been completed unless otherwise specified by the Engineer.
- 3. The tie distances to the section corner shall be measured and recorded by the IDOT Chief of Surveys.

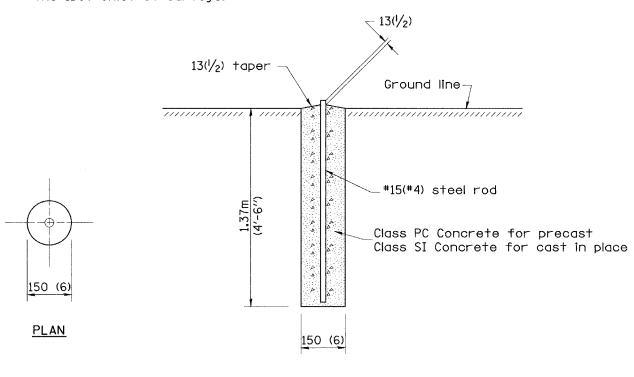

## PERMANENT SURVEY MARKERS



68201

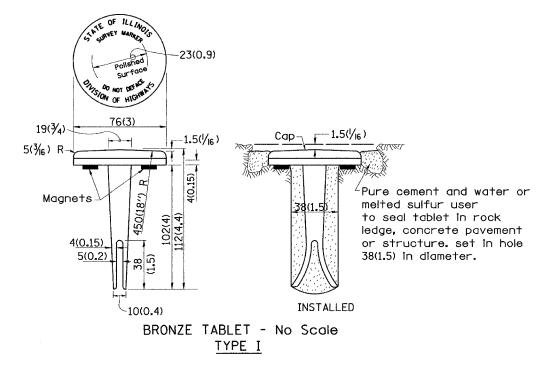

## GENERAL NOTES

250(10)

 $\triangleright$ 

Class

Concret

300 (12) min.

MARKER CAST IN PLACE

TYPE II

11/1/1/1/1/1/

(2) #15×1.2m

(#4x4') re-bars


50(2) min.

Ground line

77/2/2/

- 1. All type II markers shall be cast in place, and precast markers will not be allowed.
- 2. Two permanent magnets, each having a diameter of 19  $(\sqrt[3]{4})$  and a thickness of 6  $(\sqrt[4]{4})$ , or equivalent, shall beattached to the underside of the tablet with an approved epoxy bonding agent.
- 3. The location of the markers shall be in accordance with the plans in general, the markers will be placed at the P.T.'s and P.C.'s of horizontal curves and spaces along the tangents in a way that a minimum of two markers are alway inter-visible, and not to exceed 300m(1000').
- 4. The markers shall be placed under the direction of the Engineer and shall be installed in a workmanlike manner in order that there will be no further settlement or horizontal shifting. The monuments shall be placed in a way that the survey point will fall within the portion of the plaque provided for that purpose.
- 5. The project designation, the centerline station, the survey point, and the elevation shall be permanently marked by the use of metal dies after marker has been installed.

All dimensions are in millimeters (inches) unless otherwise noted.



ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT CADD STANDARD

PERMANENT SURVEY MARKERS TY.I - TY.II CADD STD. NO. 667101-D4

SCALE: NOT DRAWN TO SCALE DRAWN BY CADD CHECKED BY

\*DGN-ONLY\*

667101-D4

ADD DISTRICT SPECIAL PROVISION.
MODIFIES STATE STD 667101 TO CALL FOR

**SECTION**