


MILLED TEMPORARY RAMP

(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)


OPTION 1

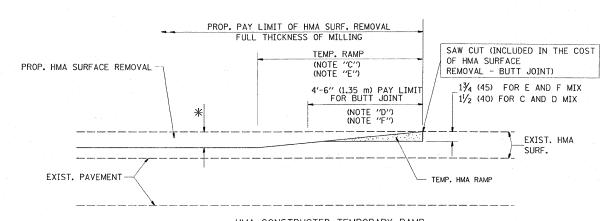

HMA CONSTRUCTED TEMPORARY RAMP (FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)

OPTION 2

TYPICAL TEMPORARY RAMP

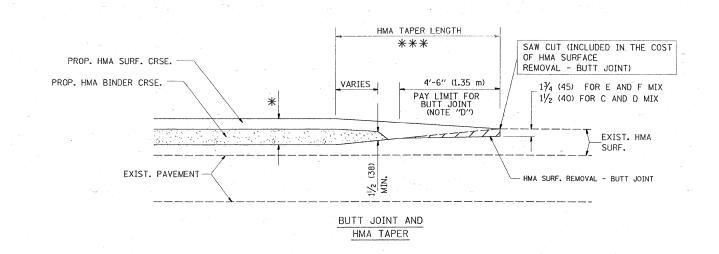


TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING


FILE NAME = JSER NAME = steedpa DESIGNED - M. DE YONG REVISED -R. SHAH 10-25-94 Now_work\PWIDOT\STEEDPA\dØ129332\D DRAWN REVISED A. ABBAS 03-21-97 PLOT SCALE = 50.0000 '/ IN. CHECKED M. GOMEZ 04-06-01 PLOT DATE = 3/25/2009 DATE 06-13-90 REVISED - R. BORO 01-01-07

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

OTHERWISE SHOWN. COUNTY TOTAL SHEETS NO. SECTION **BUTT JOINT AND** 161 Y-RS 3 COOK 26 13 HMA TAPER DETAILS BD400-05 BD32 CONTRACT NO. 60E70 SHEET NO. 1 OF 1 SHEETS STA. TO STA.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS

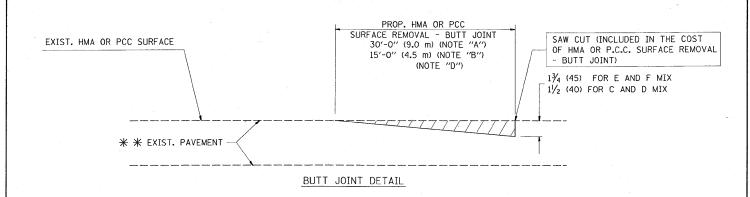

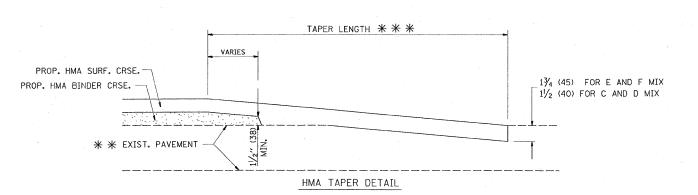

TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

* * PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL - BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

SCALE: NONE