

INFORMATIONAL WARNING SIGN (FOR NARROW TRAVEL LANES)

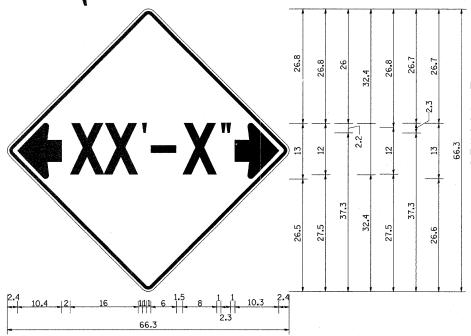

NOTES

W12-2 - Horizontal Clearance Sign 48.0" across sides, 1.9" Radius, 0.8" Border, 0.5" Indent, Black on Orange; Standard Arrow Custom 10.4" X 8.1" 180° Black 11 Inch D Series Lettering; Standard Arrow Custom 10.4" X 8.1" 0°

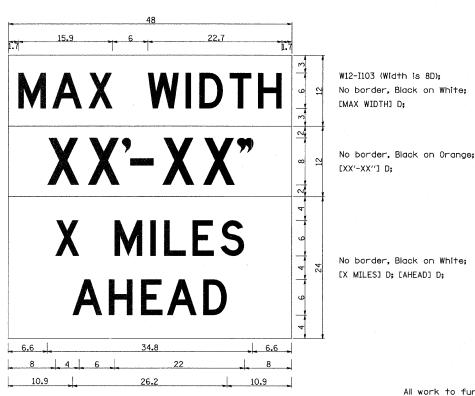



All work to furnish and install these signs shall be included in the cost of the Traffic Control Standards and shall not be paid for separately.

ALL DIMENSIONS ARE IN INCHES UNLESS

REVISED - 1-9-08


DISABLED RAMP DETAIL






SEE STANDARD 424001 FOR SIDE FLARE DETAIL & SEE PLANS FOR RAMP TYPE.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

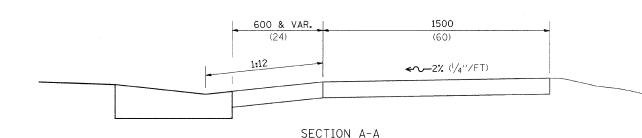



SECTION B-B

NOTES: THIS DETAIL TO BE USED IN CONJUNCTION WITH STATE STANDARD 424001. THE MAXIMUM ALLOWABLE CROSS SLOPE FOR SIDEWALK IS 2% (1/4"/FT). THE MAXIMUM ALLOWABLE SIDEWALK GRADE IS 8% (1/12"/FT). IF SPACE LIMITATIONS PROHIBIT THE USE OF THE 1:12 SLOPE, THEN SLOPES BETWEEN 1:10 ARE 1:12 ARE PERMITTED FOR A MAXIMUM RISE OF 150 (6). SLOPES 1:8 AND 1:10 ARE ALLOWED FOR A MAXIMUM RISE OF 75 (3). SLOPES STEEPER THAN 1:8 ARE

NOT PERMITTED.

THE DEPRESSED CURB IS NOT STANDARD. THE RISE IS $13(\frac{1}{2})$ INSTEAD OF $40(\frac{1}{2})$.

REVISED - 9-19-05		F.A.P. RTE.	SECTION	COUNTY	TOTAL	SHEET NO.
REVISED -	REGION 2 / DISTRICT 2 STANDARD	309	(17R)B	WHITESIDE	376	124
REVISED -		303	L	CONTRACT		64B74
REVISED -	SCALE: 50.0000 // IN SHEET NO. OF SHEETS STA. TO STA.	FED. RO	DAD DIST. NO. ILLINOIS FED. A		1101	0.01.