STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

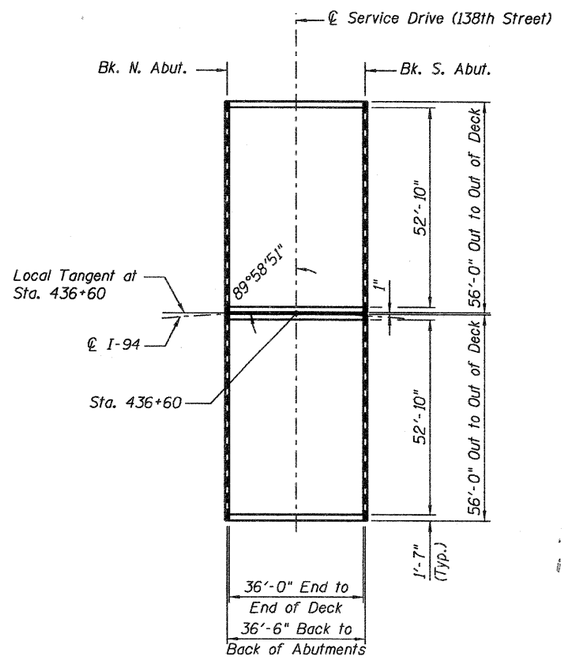

PLAN

N



LOCATION SKETCH

TOTAL BILL OF MATERIAL

Item	Unit	Total
Concrete Sealer	Sq. Ft	4350

Concrete Sealer to be placed on deck surface, top and front face of parapets.

DESIGNED	LAS
CHECKED	DAZ
DRAWN	SAW
CHECKED	LAS

Plan dimensions and details relative to existing plans are subject to nominal construction variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in the scope of work, however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.

GENERAL PLAN
BISHOP FORD EXPRESSWAY (I-94)
I-94 OVER
SERVICE DRIVE (138TH STREET)
COOK COUNTY
STATION 436+60
STRUCTURE NO. 016-2602

ZROKA engineering
Zroka Engineering, P.C.
4216 North Hermitage
Chicago, IL 60613

SHEET NO. 9 OF 13 SHEETS	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	94	(0312-708W,ETC. & 1315)RS-4	COOK	167	117
	S.N. 016-2602		CONTRACT NO. 60C08		
	FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		