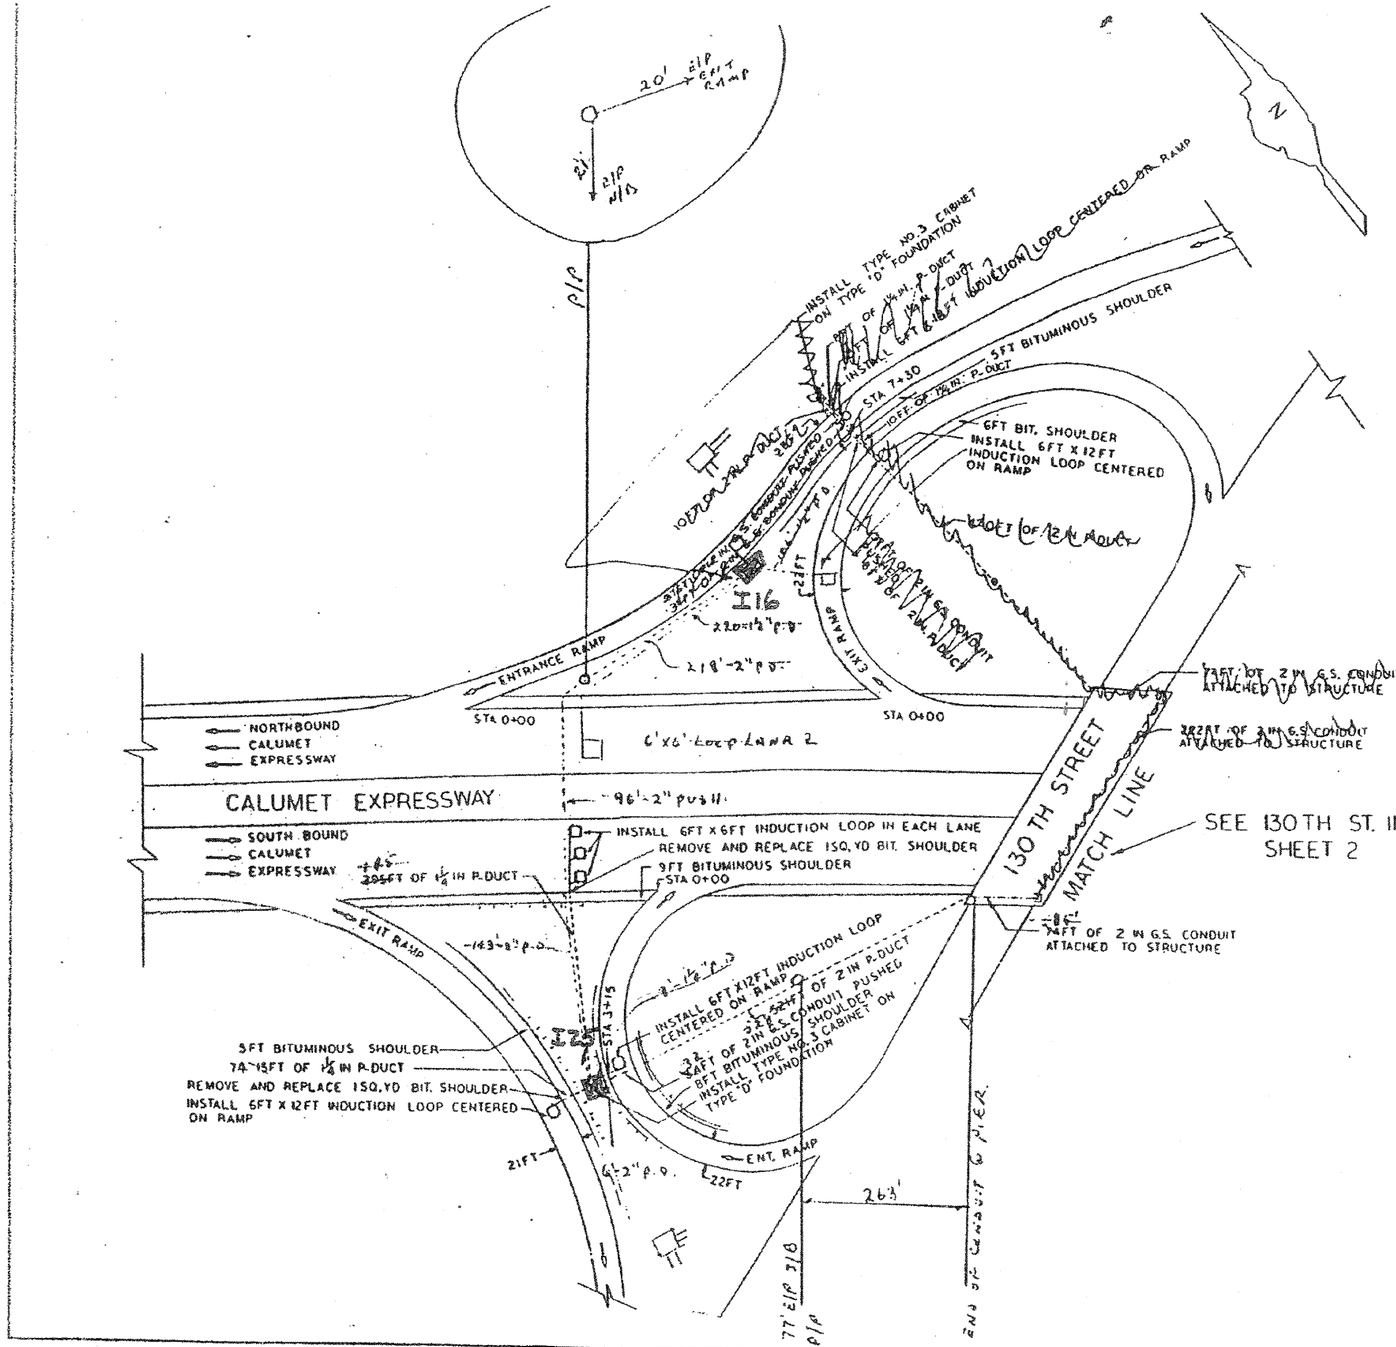

REVISION

April 12, 1972

SCHEDULE OF QUANTITIES

2388	8710	LIN.FT.	ELECTRICAL CABLE IN CONDUIT, NO.8, 7/C
3726	3400	LIN.FT.	ELECTRICAL CABLE IN CONDUIT, NO.14, 3/C
2388	8730	LIN.FT.	ELECTRICAL CABLE IN CONDUIT, NO.10, 6/C
		LIN.FT.	ELECTRICAL CABLE IN CONDUIT, NO.10, 12/C
		LIN.FT.	G.S. CONDUIT IN TRENCH, 2"
329	305	LIN.FT.	G.S. CONDUIT IN TRENCH, 2"
		LIN.FT.	G.S. CONDUIT ATTACHED TO STRUCTURE, 1-1/4"
93	270	LIN.FT.	G.S. CONDUIT ATTACHED TO STRUCTURE, 2"
		LIN.FT.	INSTALL TELEPHONE DUCT
563	940	LIN.FT.	INSTALL POLYETHYLENE DUCT, 1-1/4"
1943	1892	LIN.FT.	INSTALL POLYETHYLENE DUCT, 2"
		EACH	CONCRETE FOUNDATION, TYPE A
	6	EACH	CONCRETE FOUNDATION, TYPE B
		EACH	HEAVY DUTY HANDHOLE
		EACH	H HOLE
2350	8919	LIN.FT.	TRENCH AND BACKFILL
10	850	SQ.YD.	BITUMINOUS CONCRETE SURFACE REMOVAL AND REPLACEMENT
	1	EACH	SERVICE INSTALLATION, TYPE C
		EACH	CABINET HOUSING EQUIPMENT, PEDESTAL MOUNTED, E.S.P. 1
		EACH	CABINET HOUSING EQUIPMENT, PEDESTAL MOUNTED, E.S.P. 2
		EACH	CABINET HOUSING EQUIPMENT, POLE MOUNTED, E.S.P. 1
		EACH	CABINET HOUSING EQUIPMENT, POLE MOUNTED, E.S.P. 2
		EACH	CABINET HOUSING EQUIPMENT, ATTACHED TO STRUCTURE, E.S.P.
		EACH	CABINET HOUSING EQUIPMENT, ATTACHED TO STRUCTURE, E.S.P.
	4	EACH	CABINET HOUSING EQUIPMENT, E.S.P. 2
637.5	985	LIN.FT.	INDUCTION LOOP
16	16	EACH	TONE EQUIPMENT 3 FREQUENCY TRANSMITTER
		EACH	TONE EQUIPMENT 3 FREQUENCY MINIATURE TRANSMITTER
		EACH	TONE EQUIPMENT 3 FREQUENCY RECEIVER
	4	EACH	TONE EQUIPMENT POWER SUPPLY
	4	EACH	TONE EQUIPMENT MOUNTING FRAME
	4	EACH	INDUCTION LOOP DETECTOR POWER SUPPLY
16	16	EACH	INDUCTION LOOP DETECTOR SENSOR UNIT

LEGEND

- INDUCTION LOOP
- CABINET
- JUNCTION BOX
- SERVICE INSTALLATION
- PULL POINT
- HANDHOLE
- DUCT
- CONDUIT
- FENCE
- GUARD RAIL

FOR INFORMATION ONLY

(0314-721-1 E.I.) & (2426-721-1 E.I.)

STATE OF ILLINOIS
DIVISION OF HIGHWAYS
CHICAGO AREA EXPRESSWAY SURVEILLANCE PROJ

130TH STREET INSTALLATION
SHEET 1 OF 2

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET
FAI 94 I 94	*	COOK	40	13
DRAWN BY	SCALE	DATE	CHECKED BY	APPROVED
PSC	NONE	[illegible]	[illegible]	JMC D

FILE NAME = D160C08-149-TRAFFIC SURVEILLANCE.dgn	USER NAME = dwozniarski	DESIGNED -	REVISED -
		DRAWN - DMW, CDS	REVISED -
	PLOT SCALE = N/A	CHECKED -	REVISED -
	PLOT DATE = 2/6/2009	DATE - 2/6/2009	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BISHOP FORD EXPRESSWAY (I-94)
TRAFFIC SURVEILLANCE

SCALE: N/A | SHEET NO. 1 OF 1 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
94	(0312-708W, ETC. & 1315IRS-4	COOK	167	149
		CONTRACT NO. 60C08		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		