




ALTERNATE MATERIALS FOR WALLS	D	С	T (MIN)
PRECAST REINFORCED CONCRETE SECTIONS	4' - 0"	2' - 6"	5″
	5' - 0"	3′ - 9″	6"

- * DIMENSION "C" FOR PRECAST REINFORCED CONCRETE SECTIONS MAY VARY FROM THE DIMENSION GIVEN TO PLUS 6".
- ** FOR OPTIONAL PRECAST CONCRETE FLAT SLAB TOP, REFER TO STANDARD 602601
- *** THE CAST IRON AS DETAILED HEREON
 ARE TYPICAL. STEPS OF THE OTHER DESIGN
 THAT WILL CONFORM TO THE MINIMUM REOUIREMENT OF THE STEPS SHOWN, MAY BE
 USED WHEN APPROVED BY THE ENGINEER.





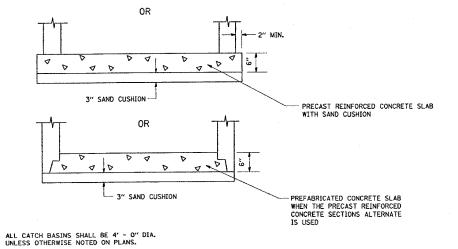

CAST IRON STEPS

CAST IRON STEPS SHALL BE GRAY IRON CONFORMING TO THE REQUIREMENTS OF ART. 602.08 OF THE STANDARD SPECIFICATIONS. STEPS SHALL BE EMBEDDED INTO WALL A MINIMUM OF 3". STEPS SHALL NOT BE EXTENDED ON THE OUTSIDE.

IN ADDITION TO THE REQUIREMENTS OF ART. 602 OF THE STANDARD SPECIFICATIONS THE CONTRACT UNIT PRICE FOR CATCH BASIN, TYPE A SHALL INCLUDE THE SAND CUSHION WHEN REQUIRED, FURNISHING AND INSTALLING STEPS, AND FURNISHING AND CPMPACTING THE SPECIFIED BACKFILL MATERIAL.

CATCH BASIN TYPE A CITY OF BLUE ISLAND TYPICAL CATCH BASIN DETAIL

ILLINOIS DEPARTMENT OF TRANSPORTATION 127TH ST. AT MAPLE AVENUE CATCH BASIN TYPE "A" CITY OF BLUE ISLAND DETAILS SCALE: VERT. HORIZ. DATE: 07-24-06 DRAWN BY CHECKED BY