
BITUMINOUS MIXTURE REQUIREMENTS:

THE FOLLOWING MIXTURE REQUIREMENTS ARE APPLICABLE FOR THIS PROJECT:

THE TOLLOWING WINKTONE	THE GOTTE THE THE
LOCATION(S):	STA. 46+68.78
MIXTURE USE(S):	PRIVATE DRIVEWAY
MIXTURE USE(S).	PRIVATE DRIVEWAT
PG	PG64-22
RAP %: (MAX) **	15%
DESIGN AIR VOIDS:	4.0% @ Ndes = 50
MIXTURE COMPOSITION:	IL-12.5 OR
(GRADATION MIXTURE)	IL-9.5
FRICTION AGGREGATE:	MIXTURE D

** IF >15% RAP IS USED, THE CONTRACTOR MAY BE REQUIRED TO USE A SOFTER GRADE OF ASPHALT AS DETERMINED BY THE MATERIALS ENGINEER.

PRIVATE ENTRANCE STA. 46+68.78 RIGHT (SEE PLAN DETAIL SHEETS FOR FURTHER DETAIL)

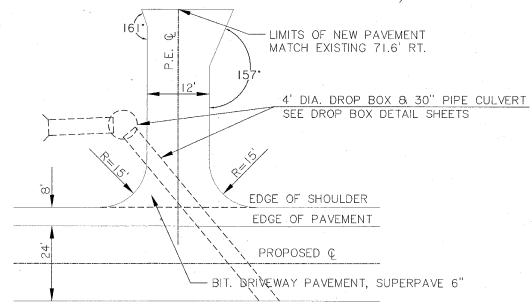

PRIVATE ENTRANCE

PROP. DRIVEWAY TYP. SECTIONS
PEORIA COUNTY
STRUCTURE NO. 072-3145

TYPICAL FIELD OR
PRIVATE ENTRANCE
(SEE PLAN DETAIL SHEETS FOR FURTHER DETAIL)

