
## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

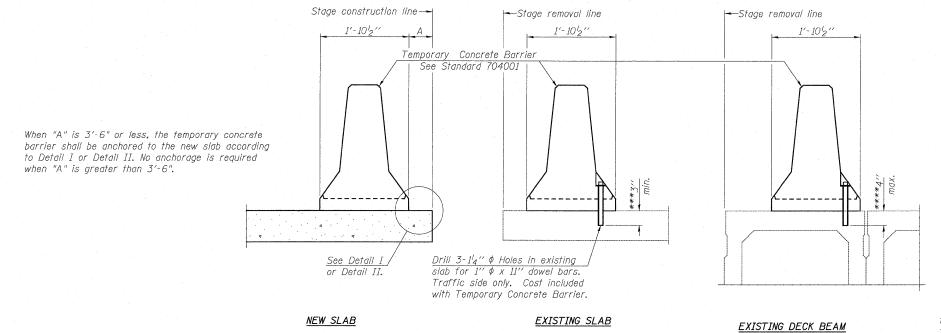

## NOTES

Detail I - With Bar Splicer or Couplers:

Connect one (1) 1"x7"x10" steel ₱ to the
top layer of couplers with 2-5<sub>8</sub>" \$\phi\$ bolts
screwed to coupler at approximate \$\mathbb{\epsilon}\$ of
each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1"x7"x 10" steel  $\mathbb F$  to the concrete slab or concrete wearing surface with  $2^{-5}8$ "  $\phi$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate  $\mathfrak L$  of each barrier panel.


Cost of anchorage is included with Temporary Concrete Barrier. The  $1^{\prime\prime}$  x  $7^{\prime\prime}$  x  $10^{\prime\prime}$  plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


## SECTIONS THRU SLAB OR DECK BEAM

\*\*\* Dimension shown is minimum required embedment into concrete.

If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

\*\*\*\* If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

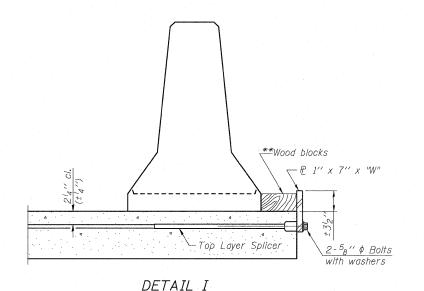

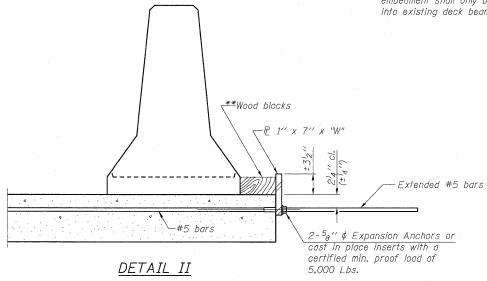

STEEL RETAINER P. 1" x 7" x 10"

\* Required only with Detail II

Top bars

spacing

Detail I

Detail II

€ 78" ¢ Holes

\*£ 1" x 12" Notch

TEMPORARY CONCRETE BARRIER

FOR STAGE CONSTRUCTION

STRUCTURE NO. 016-0519

SHEET NO. S4
SHEET NO. S4
STEEL STEEL SECTION COUNTY TOTAL SHEETS NO. 1548 461 (VB&VF) I COOK 52 16

CONTRACT NO. 60H65

DATE: 06-22-2010 ILLINOIS FED. AID PROJECT

\*\* Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

DESIGNED JPM

CHECKED TG

DRAWN MPS

CHECKED JPM, TG

R-27

Primera
188 S. MACKER DRIVE SUITE 788 . CHICAGO D. 60696 . P.312-686-0910 F.312-686-0419
11-1-09