STATE OF ILLINOIS
CITY OF DIXON
PLANS FOR PROPOSED
LOCAL AGENCY IMPROVEMENTS
FEDERAL-AID URBAN PROJECT
SECTION 07-00171-00-FP
BOYD STREET
F.A.U. ROUTE 5482
PROJECT M-5018 (17)
JOB NO. C-92-037-08
CONTRACT NO. 85429
2008

INDEX OF SHEETS

1	COVER SHEET AND INDEX OF SHEETS
2	SUMMARY OF QUANTITIES
3-5	TYPICAL SECTIONS
6	GENERAL NOTES AND DETAILS
7-8	SCHEDULES OF QUANTITIES
9-10	PLAN AND PROFILE - EAST BOYD ST.
11	PLAN AND PROFILE - DEMENT AVE.
12	INTERSECTION PAVEMENT ELEVATION DETAILS
13-14	STORM WATER POLLUTION PREVENTION PLAN
15-21	CROSS SECTIONS - EAST BOYD STREET
22	CROSS SECTIONS - DEMENT AVE.
23	WHA 204 CONCRETE STEPS
24	WHA 630 INLETS, SPECIAL
25	40.1 TYPICAL APPLICATION FOR ROAD CLOSURE

STANDARDS

280001-04	TEMPORARY EROSION CONTROL SYSTEMS
424001-05	CURB RAMPS FOR SIDEWALKS
602401-01	MANHOLE TYPE A
602701-01	MANHOLE STEPS
604001-02	FRAME AND LIDS TYPE 1
606001-03	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
664001-01	CHAIN LINK FENCE
665001-01	WOVEN WIRE FENCE
701006-02	OFF-ROAD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
701301-02	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701501-04	URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
701801-03	LANE CLOSURE MULTILANE 1W OR 2W CROSSWALK OR SIDEWALK CLOSURE
701901	TRAFFIC CONTROL DEVICES
720011	METAL POSTS FOR SIGNS, MARKERS, & DELINEATORS
728001	TELESCOPING STEEL SIGN SUPPORT
729001	APPLICATIONS OF TYPES A & B METAL (FOR SIGNS & MARKERS)

NAME AND ADDRESS OF UTILITIES	TYPE
COMCAST 4450 KISHWAUKEE ST. ROCKFORD, IL 61109 (815) 509-7876	CALBE TV
GALLATIN RIVER COMMUNICATIONS 207 W. SECOND STREET DIXON, IL 61021 (815) 288-9981	TELEPHONE
COMED 123 ENERGY AVENUE ROCKFORD, IL 61109 (800) 334-7661 (815) 490-2320	ELECTRIC
NICOR GAS 4651 LINDEN ROAD ROCKFORD, IL 61109 (815) 965-5416	GAS
CITY OF DIXON WATER DEPT. 121 WEST SECOND STREET DIXON, IL 61021 (815) 288-3381	SEWER/WATER

LOCATION MAP

DEMENT AVE.
PROJECT ENDS
STA 41+76.11

EAST BOYD ST.
PROJECT ENDS
STA 28+00.00

EAST BOYD ST.
PROJECT BEGINS
STA 17+18.97

DEMENT AVE.
PROJECT BEGINS
STA 40+62.66

STA. 24+81.07 BOYD STREET
= STA. 40+44.77 DEMENT AVE.

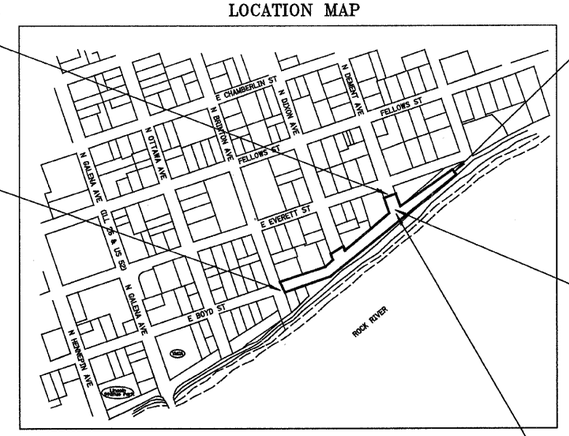

NET LENGTH = 1,194.48 FEET = 0.23 MILES

CITY OF DIXON

APPROVED 1/30/08
DATE
LOCAL AGENCY, POSITION

PASSED February 26, 2008
DATE
DISTRICT 1 ENGINEER OF LOCAL ROADS & STREETS

RELEASING FOR BID BASED ON LIMITED REVIEW
February 26 2008
DATE
DEPUTY DIRECTOR OF HIGHWAYS, REGION 2 ENGINEER

DESIGN CRITERIA

DESIGN SPEED: 30 MPH – EAST BOYD STREET

FUNCTIONAL CLASSIFICATION	HIGHWAY	ADT (2028)	% TRUCKS
URBAN COLLECTOR ST.	EAST BOYD STREET	500	5

SCALES:

PLAN AND PROFILE
HORIZ. 0 20 40
VERT. 0 5 10

CROSS SECTIONS
HORIZ. 0 5 10
VERT. 0 5 10

STATE OF ILLINOIS
LICENSED
PROFESSIONAL ENGINEER OF ILLINOIS
1-31-08
LICENSE EXP. 11-30-09

CALL J.U.L.I.E. TOLL FREE 800-892-0123

S:/TRANS/1050D07/COVERETC.DGN

FILE NAME = $FILE$	USER NAME = $USER$	DESIGNED - ___	REVISED - ___	WILLETT, HOFMANN & ASSOCIATES, INC CONSULTING ENGINEERS DIXON, IL	BOYD STREET
		DRAWN - ___	REVISED - ___		
	PLOT SCALE = $SCALE$	CHECKED - ___	REVISED - ___		
	PLOT DATE = $DATE$	DATE - _____	REVISED - ___		SCALE: _____ SHEET NO. __ OF ___ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
5482	07-00171-00-FP	LEE	25	1
	CITY OF DIXON	CONTRACT NO. 85429		
FED. ROAD DIST. NO. _	ILLINOIS	FED. AID PROJECT		

PLAN — SURVEYED / PLOTTED / ALIGNMENT CHECKED / F.H. OF R.W. CHECKED / CADD FILE MADE — BY / DATE — NOTE BOOK NO. ___

PROFILE — SURVEYED / PLOTTED / GRADES CHECKED / BAL. NOTED / STRUCTURE NOTATIONS ADDED — BY / DATE — NOTE BOOK NO. ___