
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

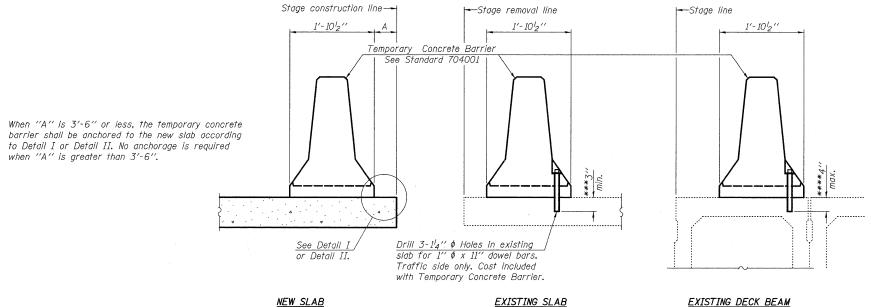

<u>NOTES</u>

Detail I - With Bar Splicer or Couplers:

Connect one (1) 1"x7"x10" steel P to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate \$\mathcal{L}\$ of each barrier panel.

Detail II - With Extended Reinforcement Bars:
 Connect one (1) 1'x7''x10'' steel \mathbb{R} to the concrete slab or concrete wearing surface with $2^{-5}8'' \phi$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate \mathbb{Q} of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier.
The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


SECTIONS THRU SLAB OR DECK BEAM


***Dimension shown is minimum required embedment into concrete.

If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.


****If existing deck beam is to remain in place after stage construction,

****If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

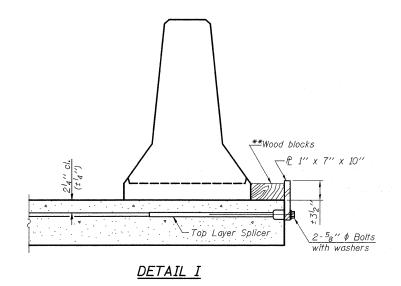

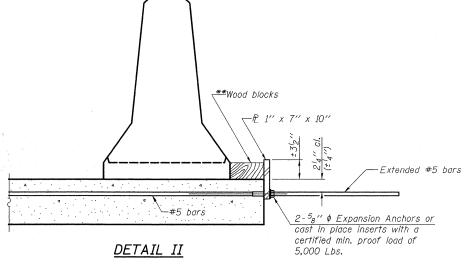

^{**}Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

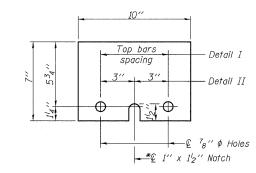

STEEL RETAINER P 1" x 7" x 10"

*Required only with Detail II

TEMPORARY CONCRETE BARRIER
FOR STAGE CONSTRUCTION
IL 15 OVER TRIBUTARY TO
UNION DRAINAGE DITCH
STATION 239+87.00
STRUCTURE NO. 096-2011

SHEET NO.3	F.A.P. RTE.	SECTION			COUNTY	TOTAL SHEETS	SHEET NO.
	823	(22BR1) B-1			WAYNE	142	33
OF 7 SHEETS					CONTRACT	NO. 74	238
	FED. R	DAD DIST. NO. 7	ILLINOIS	FED. AI	D PROJECT		

R-27

05-16-08