


EXISTING TYPICAL SECTION

FROM BURGESS ROAD TO COUNTRY CLUB PLACE STA. 43+25 TO STA. 54+00, KANEVILLE ROAD N.T.S.

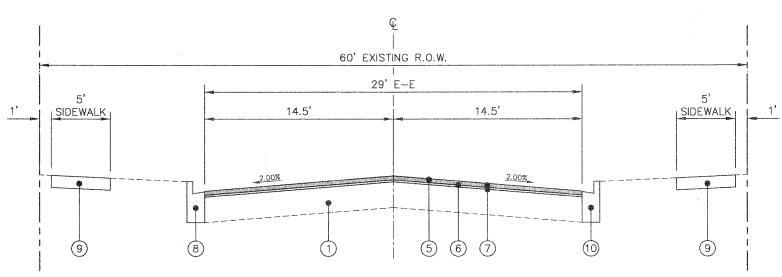

PROPOSED TYPICAL SECTION

FROM BURGESS ROAD TO COUNTRY CLUB PLACE STA. 43+25 TO STA. 54+00, KANEVILLE ROAD N.T.S.

LEGEND

- 1) EXISTING 11" TO 13" FULL-DEPTH ASPHALT PAVEMENT
- 2) EXISTING B-6.12 COMBINATION CONCRETE CURB AND GUTTER
- (3) EXISTING PORTLAND CEMENT CONCRETE SIDEWALK, 5"
- 4) HOT-MIX ASPHALT SURFACE REMOVAL, 3.25"
- 5) HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, 2.0"
- 6) LEVELING BINDER (MACHINE METHOD), N70, 1.25"
- 7) BITUMINOUS MATERIALS (PRIME COAT) AND AGGREGATE (PRIME COAT)
- 8 COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT (AT VARIOUS LOCATIONS)
- 9 PORTLAND CEMENT CONCRETE SIDEWALK REMOVAL AND REPLACEMENT (AT VARIOUS LOCATIONS)

COPYRIGHT © 2009 ENGINEERING ENTERPRISES, INC.

Engineering Enterprises, Inc.
consulting Engineers
52 Wheeler Road
Sugar Grove, Illinois 60554
630.466.6700 / www.eeiweb.com

CITY OF GENEVA KANE COUNTY, ILLINOIS

NO.	DATE	REVISIONS
A COLUMN TO SERVICE		

KANEVILLE ROAD
LAPP IMPROVEMENTS

TYPICAL EXISTING AND PROPOSED CROSS SECTIONS

 				1
DATE:	AUGUST		2009	
PROJECT	NO:		GE0901	-
FILE:		GE090	D1-CVR	-
0.1555	5		18	-