


TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

EXIST. HMA OR PCC SURFACE

SURFACE REMOVAL - BUTT JOINT
30'-0" (9.0 m) (NOTE "A")
15'-0" (4.5 m) (NOTE "B")

(NOTE "D")

** * EXIST. PAVEMENT

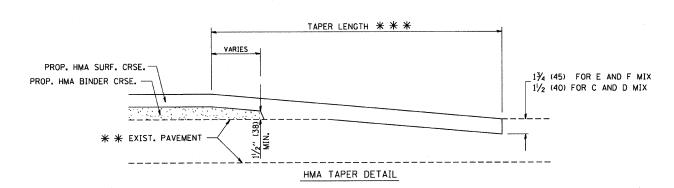

BUTT JOINT DETAIL

TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

* * PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

 $\mbox{\ensuremath{\mbox{\#}}}\mbox{\ensuremath{\mbox{\#}}}\mbox{\ensuremath{\mbox{20'}}}\mbox{\ensuremath{\mbox{0''}}}\mbox{\e$

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SOUARE YARD (SOUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

| REVISIONS | | |
|------------|----------|------|
| NAME | DATE | |
| M. DE YONG | 6-13-90 | |
| M. DE YONG | 7-3-90 | |
| M. DE YONG | 3-27-92 | |
| R. SHAH | 09/09/94 | |
| R. SHAH | 10/25/94 | |
| A. ABBAS | 03/21/97 | |
| M. GOMEZ | 04/06/01 | |
| R. BORO | 01/01/07 | SCAL |
| | | SCAL |
| | | |

ILLINOIS DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND HMA TAPER DETAILS

SCALE: VERT. NONE

DRAWN BY CHECKED BY

BD400-05 (VI=BD32)