CENTER LANE CLOSURE TYPE I CHECK BARRICADES— AT 100' (30 m) CENTERS DRUMS AT 50' (15 m) CENTERS ARROW BOARD DISPLAYING-DOUBLE ARROW PATTERN 1010 LANE CLOSED AHEAD W9-3-48 [₩] ₩9-3a-48 SIGNING & BARRICADING ACCORDING TO FREEWAY STANDARD FOR A ONE LANE CLOSURE INSTALLATION SEQUENCE 1. CLOSE LANES 1&2 ACTIVE NOTES WORK AREA 1. DRUMS WITH STEADY BURN LIGHTS SHALL BE USED AT 50' (15 m) CENTERS ON ALL TAPERS AND TANGENTS IN 2. ERECT INSIDE LANE 2 TAPER ADVANCE OF WORK AREA. 2. CLOSURE SHALL BE USED ONLY FOR OPERATIONS LASTING 72 HOURS OR LESS. 3. OPEN LANE 2 BY RELOCATING FIRST TAPER 3. CENTER LANE CLOSURE CONFIGURATION NON-ACTIVE WORK AREA IS NOT TO BE USED WITH WORKERS 4. REMOVE CLOSURE IN REVERSE ORDER FILE NAME = USER NAME = leusa DESIGNED REVISED - J.A.F. 04-03 /i\diststd\22×34\tc25.dor DRAWN REVISED S.P.B. 01-07

CHECKED

DATE

PLOT SCALE = 50.000 '/ IN


PLOT DATE = 1/26/2010


S.P.B. 12-09


REVISED

SHOULDER LANE

NOTE: CLOSURE SHALL BE USED ONLY FOR OPERATIONS LASTING 72 HOURS OR LESS.

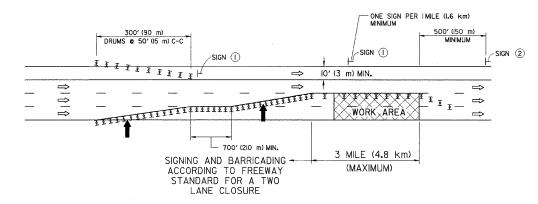

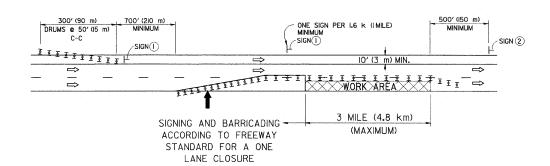

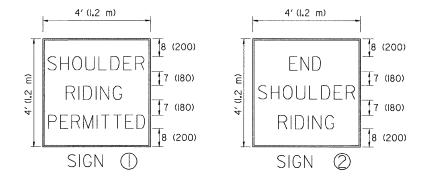

6 (I50) SERIES "C" LEGEND BLACK LEGEND WHITE REFLECT. BACKGROUND 1(25) BORDER

SYMBOLS

DIRECTION OF TRAFFIC

ARROWBOARD

ACTIVE WORK AREA

- ⊢ SIGN ON PORTABLE OR PERMANENT SUPPORT ★
- TYPE #BARRICADE, OR DRUM WITH MONO-DIRECTIONAL STEADY BURN LIGHT

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN

* ALL SIGNS SHALL BE MOUNTED AT A MINIMUM HEIGHT OF 5' (I.5 m).

SECTION TRAFFIC CONTROL DETAILS FOR FREEWAY COUNTY STATE OF ILLINOIS соок CENTER LANE CLOSURE SHOULDER LANE **DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 60P37 TC-25 SHEET NO. 1 OF 1 SHEETS STA. SCALE: NONE TO STA.