NOTES

1. CROSS SECTIONS ARE BASED ON ALTERNATE BID A. ADD 2 INCH CUT FOR ALTERNATE BID B. SURFACE GRADES SHALL REMAIN THE SAME FOR EITHER ALTERNATE.

2. ELEVATIONS PROVIDED AT LOCATIONS THAT MATCH EXISTING PAVEMENTS OR BUILDING FLOORS ARE FOR REFERENCE ONLY. THE CONTRACTOR SHALL CONSTRUCT THE PROPOSED JOINTS FLUSH WITH EXISTING OR AS DETAILED. CONTRACTOR IS RESPONSIBLE FOR VERIFYING EXISTING ELEVATIONS AT MATCH POINTS.

11+00

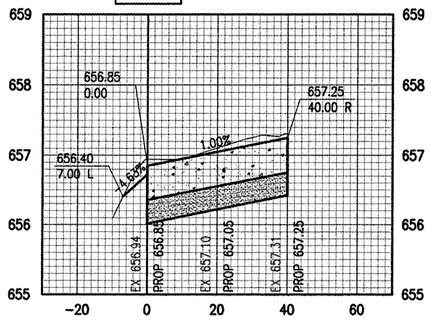

12+50

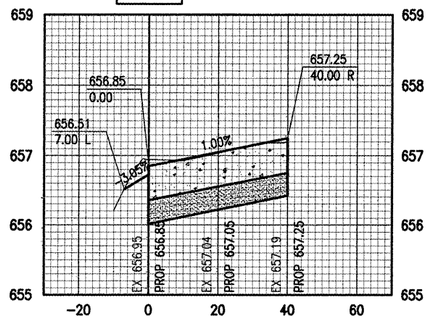

13+99

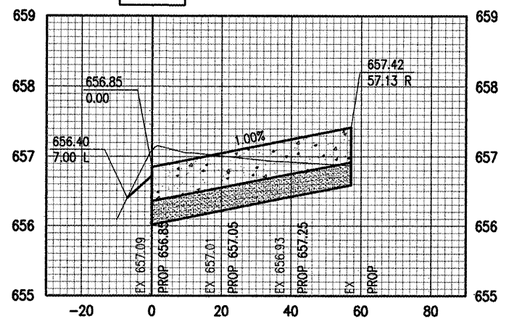

10+50

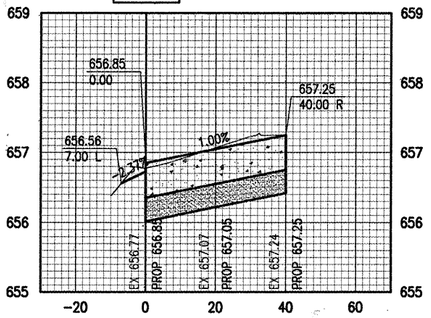

12+00

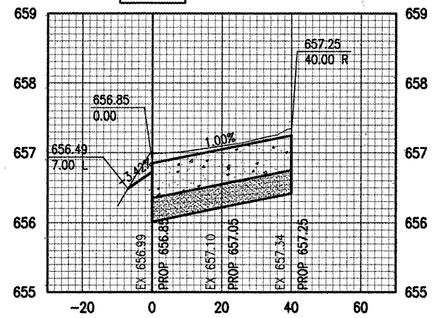

13+50

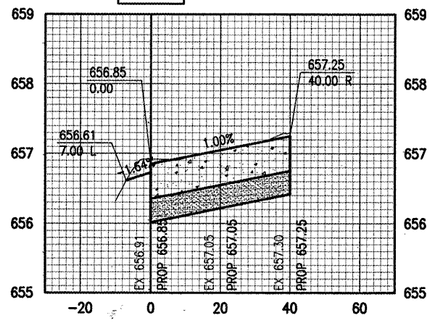

10+00

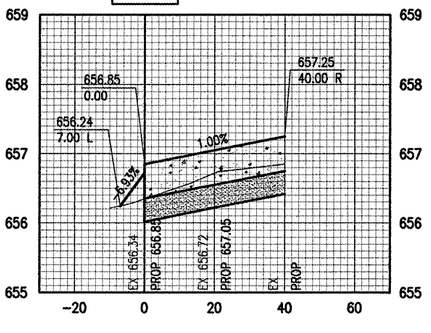

11+50

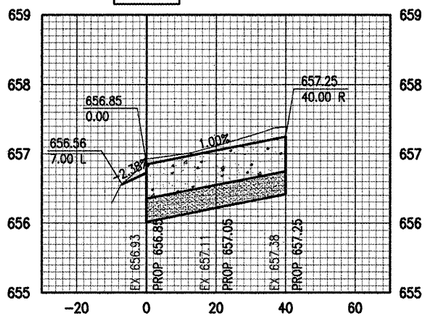

13+00

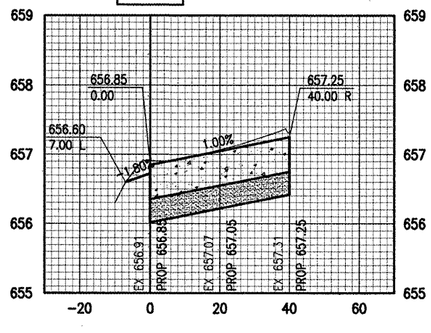

APR 13, 2009 5:20 PM HARR01115
L:\08JOBS\0840209 PRO\CADD\AIRPORT\MODEL\CORR-SURF.DWG

DATE	REVISION	BY

EDGAR COUNTY AIRPORT
PARIS, ILLINOIS

IL. PROJ.: PRG-3889 A.I.P. PROJ.: 3-17-0077-B11

HEI Project No. 0840209 0800
Filename CORR-SURF.DWG
Scale 1"=20' H 1"=1' V
Date 04/17/09

LAYOUT	DAK	03/06/09
DRAWN	DAK	03/06/09
REVIEWED	JDW	03/18/09

HANSON

© Copyright Hanson Professional Services Inc. 2009

Hanson Professional Services Inc.
1525 South Sixth Street
Springfield, Illinois 62703-2886
www.hanson-inc.com
Offices Nationwide

REMOVE AND RECONSTRUCT
T-HANGAR TAXIWAYS

PROPOSED CROSS SECTIONS -
WEST ALIGNMENT
STA. 10+00 TO STA. 13+99

16
16 of 18 sheets