CONTRACT NO. 95522

RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
7622	06-00085-00-BR	COLES	16	1

INDEX OF SHEETS

1 COVER SHEET
2 SUMMARY OF QUANTITIES /EARTHWORK SCHEDULE
3–4 TYPICAL CROSS SECTIONS
5 REMOVAL PLAN
6 PLAN AND PROFILE
7 SEGMENTAL BLOCK WALL PLAN AND PROFILE
8 STEEL RAILING DETAIL
9–14 BRIDGE PLANS
15–16 CROSS SECTIONS

STANDARDS

000001-04	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
515001-02	NAME PLATE FOR BRIDGES
542301-01	PRECAST REINFORCED CONCRETE FLARED END SECTION
602301-01	INLET, TYPE A
602401-01	MANHOLE, TYPE A
602701-01	MANHOLE STEPS
604001-02	FRAME AND LIDS, TYPE 1
604051-02	FRAME AND GRATE TYPE 11
606001-03	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
701001-01	OFF-RD OPERATIONS, 2L, 2W, MORE THAN 4.5 M (15') AWAY
701006-02	OFF-RD OPERATIONS, 2L, 2W, 4.5 M (15"O TO 600 MM (24") FROM PAVEMENT EDGE
701301-02	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701501-03	URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
702001-06	TRAFFIC CONTROL DEVICES
B.L.R. 21-6	TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

SCALE IN FEET

PLAN — 20 0 20 40 — 1" = 20'

PROFILE Vert. — 5 0 5 10 — 1" = 5'

Horiz. — 20 0 20 40 — 1" = 20'

CROSS SECTIONS Vert. — 5 0 5 10 — 1" = 5'

Horiz. — 10 0 10 20 — 1" = 10'

ADT–CURRENT 650 DESIGN 800
CLASS–URBAN COLLECTOR
DESIGN SPEED–30 MPH

CONTRACT NO. 95522

THE UPCHURCH GROUP
architects engineers surveyors
HILLSIDE, IL. (708) 449-2321
MATTOON, IL. (217) 235-3177

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

PLANS FOR PROPOSED BRIDGE HIGHWAY PROGRAM

SECTION 06–00085–00–BR
CITY OF CHARLESTON
FAU 7622 (JACKSON AVE.)
COLES COUNTY

JOB NO. C–97–075–07

PROJECT NO. BRM–5013(15)

R 9E , 3 P.M.

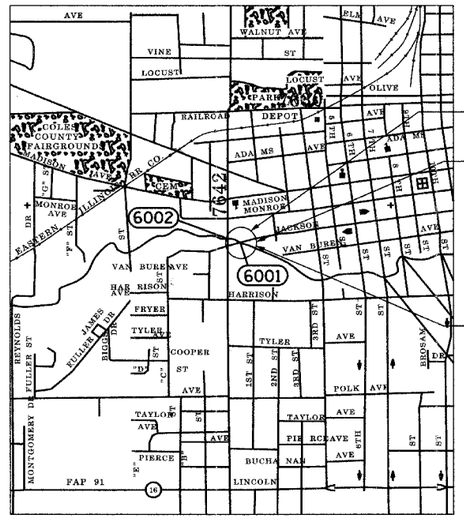

N

7

T 12 N

END SECTION 06-00085-00-BR
STA. 16+50

℄ PROPOSED STRUCTURE #015-6340
STA. 15+02, 32'-0" WIDE x 10'-0"
3 SIDED PRECAST CONCRETE
STRUCTURE, 30 ° SKEW
EXISTING STRUCTURE #015-6001

BEGIN SECTION 06-00085-00-BR
STA. 14+06

LOCATION MAP

0 1000 2000 — 1" = 1000 feet

TOTAL LENGTH OF PROJECT = 244 FT. = 0.046 MILES
NET LENGTH OF PROJECT = 244 FT. = 0.046 MILES

LOCATION OF SECTION INDICATED THUS: –■–

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1–800–892–0123

APPROVED 6/28 20 07
CJ Buescher
PUBLIC WORKS DIRECTOR

PASSED July 2 20 07
Maureen Lantow
DISTRICT SEVEN ENGINEER OF LOCAL ROADS AND STREETS

Realeasing For Bid Based on Limited Review July 2, 20 07
Christine H. Reed
DEPUTY DIRECTOR OF HIGHWAYS
REGION FOUR ENGINEER
STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MARK E. DWIGGINS 062-060308 REGISTERED PROFESSIONAL ENGINEER STATE OF ILLINOIS

Mark E. Dwiggins 6/28/07
MARK DWIGGINS , P.E. LICENSE EXPIRATION DATE 11–30–07

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS