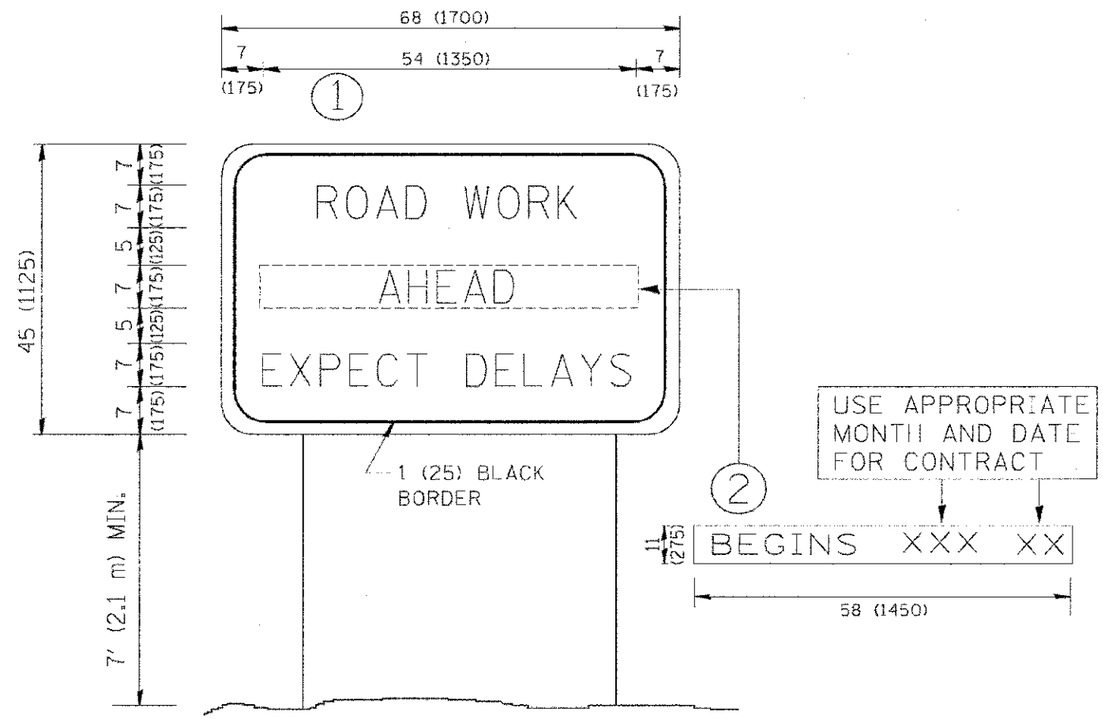

NOTES:

1. USE BLACK LETTERING ON ORANGE BACKGROUND.
2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. ERECT SIGN (1) WITH INSTALLED PANEL (2) ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
4. REMOVE PANEL (2) SOON AFTER THE START OF CONSTRUCTION.
5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
6. ONE SIGN ASSEMBLY EQUALS 25.70 SQ. FT. (2.3 SQ. M.)
7. SHALL BE PAID FOR AS TEMPORARY INFORMATION SIGNING.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

COPYRIGHT © 2001 BY BAXTER & WOODMAN, INC.
STATE OF ILLINOIS PROPRIETARY DESIGN FILE
DATE PLOTTED 8/30/2002 TIME PLOTTED 9:29:12 AM
USERNAME: BY: CURT CYPERS

FILE NAME = M:\dhsts\td\22x34\tc22.dgn	USER NAME = geglionabt	DESIGNED -	REVISED - R. MIRS 09-15-97	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION
		DRAWN -	REVISED - R. MIRS 12-11-97	
	PLOT SCALE = 50.000 ' / IN.	CHECKED -	REVISED - T. RAMMACHER 02-02-99	
	PLOT DATE = 1/4/2000	DATE -	REVISED - C. JUCIUS 01-31-07	

ARTERIAL ROAD INFORMATION SIGN

SCALE: NONE | SHEET NO. 1 OF 1 SHEETS | STA. | TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1332	91-00286-00-LS	COOK	29	29
	TC-22	CONTRACT NO. 63737		

FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT TE-00D(889)